
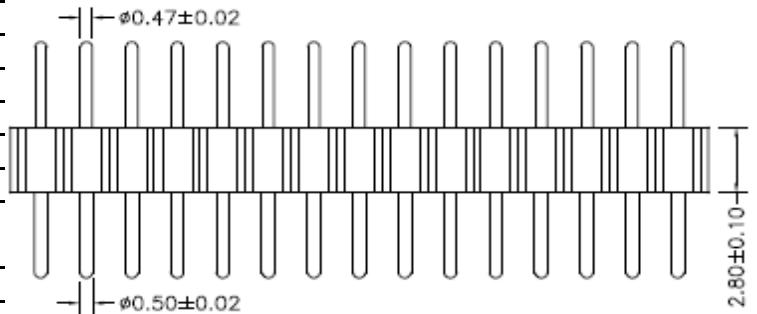




Technical Specification

Insulator:	Black glass filled polyester PPS-GF-30-FR
Flammability:	UL 94V-0
Sleeve:	Brass CuZn 36Pb3 (36000)
.-Insertion:	0,7N typ.
.-Withdrawel:	0,4N typ.
Mechanical Life:	min 500 cycles
Rated Current:	1A
Contact Resistance:	max. 4m Ohm
Dielectric Strength:	min 1000V rms
Maximal position of deliver:	4
Maximal position of deliver:	80

Technical Drawing

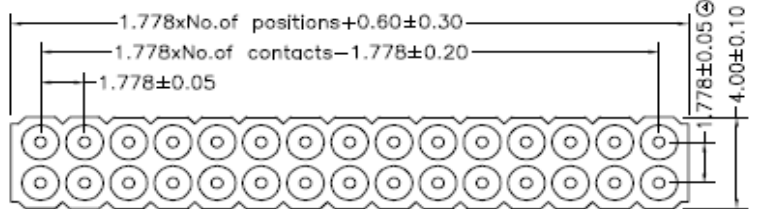

PCB Layout

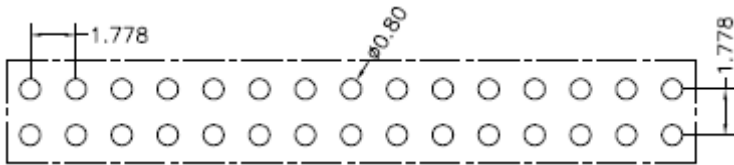

Ordering Information

Serie	No. of Pos.	Solder Pin Plating	Special Function	ROHS	Packing
T40145	80	A	0	R	B1

04 ~ 80	A= Tin 150µ" (Standard)	0= No special function	R= ROHS conform	B1= Bulk 100PCS
	B= Tin 200µ"	1= Tin 150µ"		
	C= GF	2= Tin 200µ"	N= NON ROHS conform	I1= individuell
	D= Gold 2µ"	3= GF (Standard)		
	E= Gold 3µ"	4= Gold 2µ"		
	F= Gold 10µ"	5= Gold 3µ"		
	G= Gold 15µ"	6= Gold 10µ"		
	H=Special	7= Gold 15µ"		
	8=Special			

**Machined Contact Pitch
1,778mm**

Part No.: **T40145**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	22.07.2017
APPD:	Join			FINISH	Shieh	Sheet	1 from 1