



Technical Specification

Insulator:	Black glass filled polyester PPS-GF-30-FR
Flammability:	UL 94V-0
Sleeve:	Brass CuZn 36Pb3 (36000)
Contact Clip (6finger):	Beryllium Copper (C17200)
Forces:	polished steel gauge(Ø)0,76mm
.-Insertion:	1,2N typ.
.-Withdrawel:	0,6N typ.
Mechanical Life:	min 500 cycles
Rated Current:	3A
Contact Resistance:	max. 10m Ohm
Dielectric Strength:	min 1000V rms
Minimal position of deliver:	8
Maximal position of deliver:	160

PCB Layout

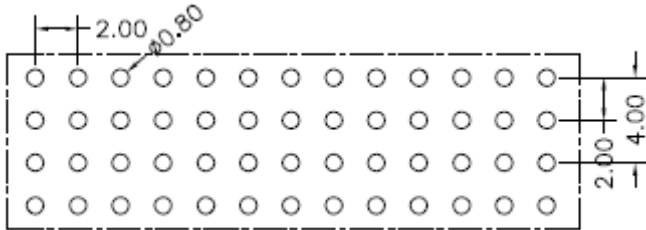

Technical Drawing

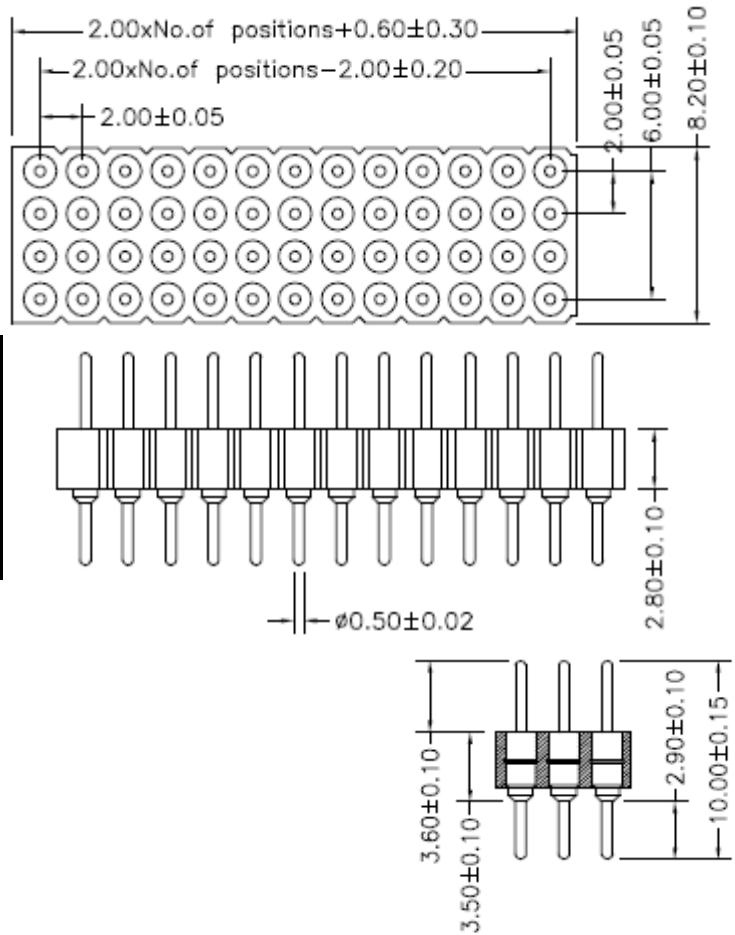

Ordering Information

Serie	No. of Pos.	Solder Pin Plating	Special function	ROHS	Packing
-------	-------------	--------------------	------------------	------	---------

T40155	008	C	0	R	B1
---------------	------------	----------	----------	----------	-----------

008 ~160	A= Tin 150µ" (Standard)	0= No special function	R= ROHS conform	B1= Bulk 100PCS
	B= Tin 200µ"			
	C= GF			
	D= Gold 2µ"			
	E= Gold 3µ"			
	F= Gold 10µ"			
	G= Gold 15µ"			
	H= Special			

Machined Contact Pitch 2,54mm	
Part No.:	T40155
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	21.07.2017
APPD:	Join			FINISH	Shieh	Sheet	1 from 1