


EDCON-COMPONENTS

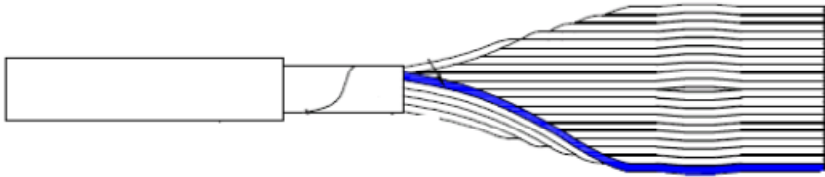

Technical Information

Conductor

Size: 28AWG
 Construction: 7 / 0.127 +/- 0,005mm
 Material: Tinned Copper Conductor
 Conductor Diameter: 0,39mm +/-0,05

Insulation

Minimum Thickness: 0,18mm
 Average Thickness: 0,26mm
 Colour: Gray
 Diameter: 0,8 +/- 0,05mm
 Material: PVC 90P

Jacket

Material: PVC
 Diameter: A +/- 0,5m
 Marking: Round Jacket FlatCable AWM 28AWG I
 A/B 80°C 300V VW-1

Electric Function

Rated Voltage: 300V
 Rated Temp. : -20°C ~ 105°C
 Withstanding Voltage: 2500V / One Minute
 Spark Test: 2500 V 0.15 Sec Min
 Cond. Resistance: MAX 237Ω 7 KM 20°C
 Insulation Resistance: MIN. 0,75MΩ / KM 20°C
 Tensile Strength: ≥ 1500PSI
 Elongation: ≥ 100%

Technical Specification

Cores	A ± 0.5	B ± 0.25			
9	6,6	10,20			
10	6,6	11,40			
14	6,9	16,50			
15	6,9	17,80			
16	6,9	19,10			
20	7,6	24,10			
24	8,4	29,20			
25	8,4	30,50			
26	8,4	31,80			
30	9,4	36,80			
34	9,4	41,90			
36	9,9	44,50			
37	9,9	45,70			
40	9,9	49,50			
50	11,2	62,20			
60	11,9	74,90			
64	12,7	80,00			



**ROUND-FLAT CABLE
 UNSHIELDED Gray Pitch
 1,27mm**

Part No.: **T29034**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	13.12.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

Customer:

EDCON-COMPONENTS

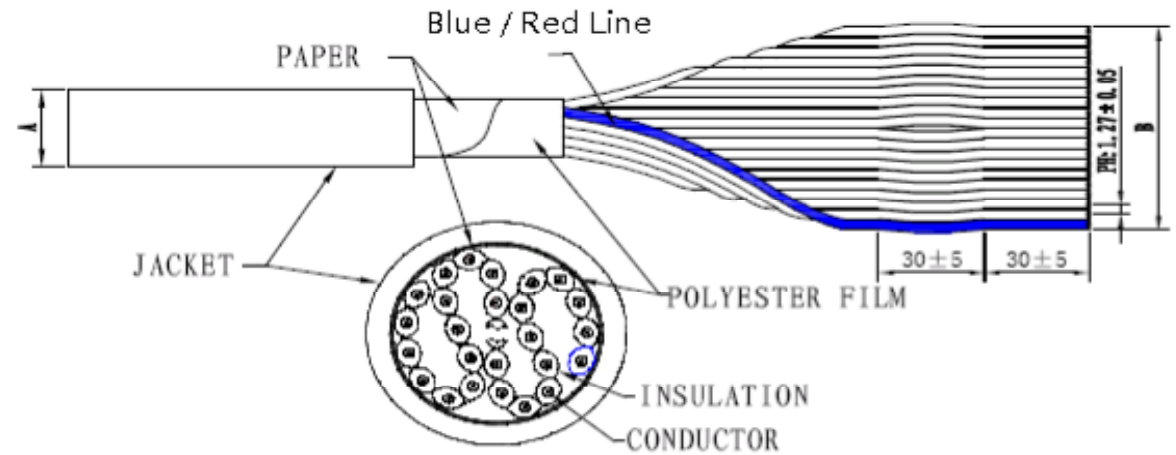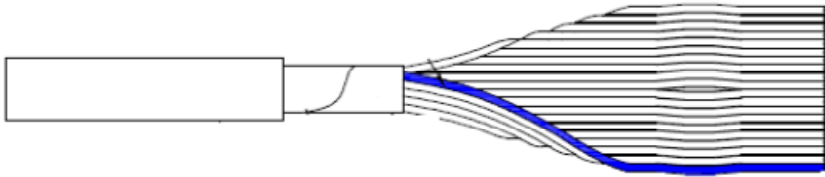

Ordering Informations

Serie	Cores	Color	ROHS	M/Reel
-------	-------	-------	------	--------

T29034	10	GR	R	61
---------------	-----------	-----------	----------	-----------

xx= Look table of Position	GR= Gray w. RED / Blue Line	R= ROHS Conform	61= 61 Meter/Reel
		N= NON ROHS Conform	

ROUND-FLAT CABLE UNSHIELDED Gray Pitch 1,27mm	
Part No.:	T29034
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	13.12.2018
APPD:	Schumi			FINISH	Jamy			Sheet No.	2 from 2

www.edcon-components.com

email: info@edcon-components.com