

EDCON-COMPONENTS





Specifications

Current Rating: 2A
 Contact Resistance: 30mΩ max.
 Insulation Resistance: 3000MΩ min.
 Withstanding Voltage: 500 V AC/Minute
 Operating Temperature: -40°C to + 105°C

Material Housing: PBT, glass reinforced, UL94V-0
 Insulator: Phosphor Bronze
 Contact: Blue or Black
 No. of Pin: 02 ~ 20
 Cable Wire: 28AWG,26AWG,24AWG
 Insulator OD: 0,9 to 1,2mm

Drawing (dimensions all into mm)

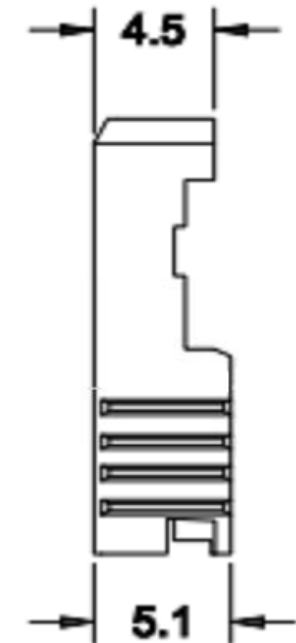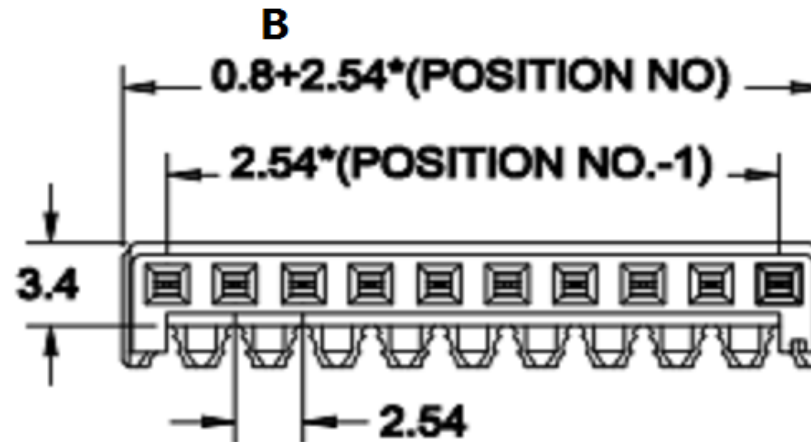

IDC-Housing Serie T68N324 Pitch 2,54mm	
Part No.:	T68N324
Customer:	


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.09.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3

EDCON-COMPONENTS



Dimension Information about Housing

Pos.	Dimension (mm)				
	2,54	A	B		
2	2,54	5,58	5,88		
3	2,54	8,12	8,42		
4	2,54	10,66	10,96		
5	2,54	13,20	13,50		
6	2,54	15,74	16,04		
7	2,54	18,28	18,58		
8	2,54	20,82	21,12		
9	2,54	23,36	23,66		
10	2,54	25,90	26,20		
11	2,54	28,44	28,74		
12	2,54	30,98	31,28		
13	2,54	33,52	33,82		
14	2,54	36,06	36,36		
15	2,54	38,60	38,90		
16	2,54	41,14	41,44		
17	2,54	43,68	43,98		
18	2,54	46,22	46,52		
19	2,54	48,76	49,06		
20	2,54	51,30	51,60		

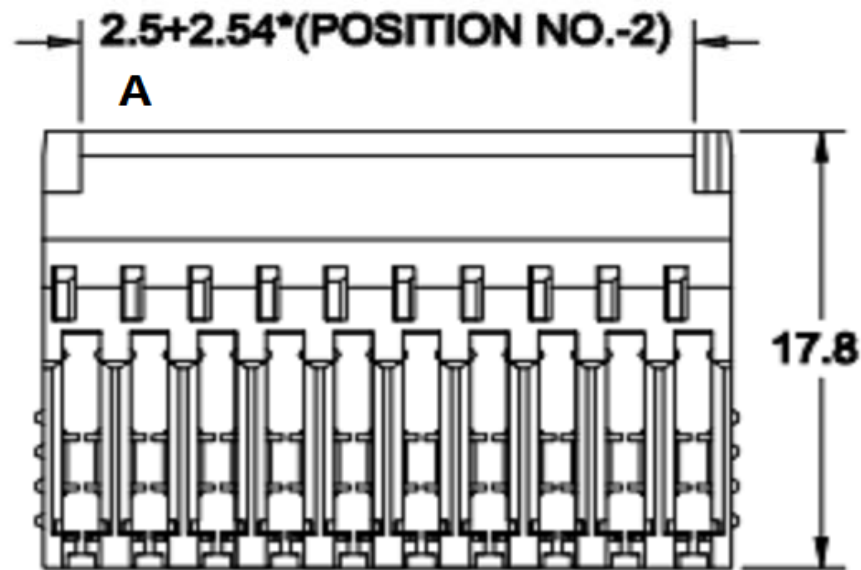

IDC-Housing Serie T68N324 Pitch 2,54mm	
Part No.:	T68N324
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.09.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3

EDCON-COMPONENTS



Ordering Informations

Serie	Number of Pos.	Color of Body	AWG-Size	Contact Plating	Special Option	ROHS	Packing			
T68N324	02	BK	A	TN	N	R	BU			
xx = No of Pos. look table	BL = Blue	A = AWG28	TN = Tinned on contact and Wire Side	N = No special Option	R = ROHS Conform	BU = Bulk Packing				
	BK = Black	B = AWG26			N = NON ROHS	IV = Individual Packing				
	C = AWG24	GF = Selectiv Gold Flash on Contact Side Tinned on wire Side								

IDC-Housing Serie T68N324 Pitch 2,54mm
Part No.: T68N324
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.09.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3