






# EDCON-COMPONENTS




## Technical Discription

Curent Rating:	23A AC/DC 600V AC/DC
Contact Resistance:	10mΩ max.
Withstanding Voltage:	2200VAC/ DC
Insulation Resistance:	1000MΩ Min
Operating Temperature:	.-40°C to + 105°C
Contact Material:	Brass
Contact Plating:	Matte SN over Ni
Insulator Material:	Nylon 66 UL94V-2 Black
Available Pos.	4 to 12Pos

## Drawing

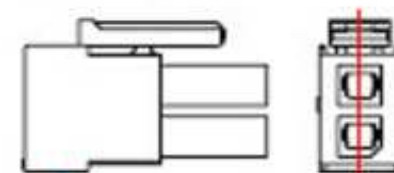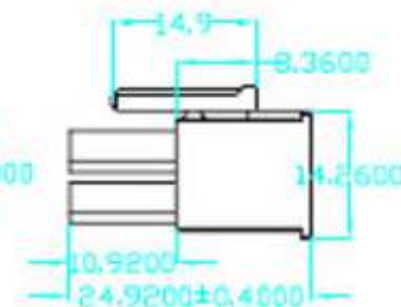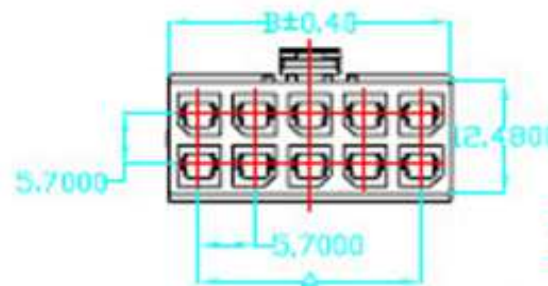

SECTION VIEW OF 2-12T (12/11)

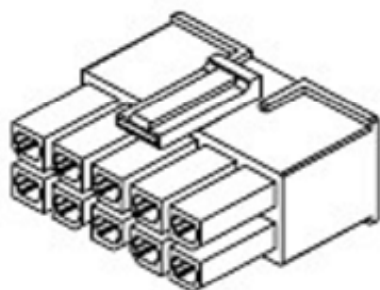

Current rating: With tinned AWG copper wire						
Wire siize		N				
AWG	Max. Ins. Dia.	2	4	6	8~12	
#12 = 4,0mm <sup>3</sup>	.162" (4,1mm)	23	20	18	16	
#14 = 2,5mm <sup>3</sup>	.148" (3,75mm)	21	17	15	13	
#16 = 1,5mm <sup>3</sup>	.125" (3,18mm)	17	15	13	12	

**Wire to Board Connector  
(Housing) Dual Row**

Part No.: **T68X006**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	06.06.2021
APPD:	Schumi			FINISH	Jamy			Sheet No.	1 from 3

Customer:

# EDCON-COMPONENTS



Dimension (mm)



2 CKTS




4 CKTS




6 CKTS




8 CKTS



10 CKTS



12 CKTS



Circuits	Dim. A	Dim. B
2	N / A	8,35
N	$2.85 \times N - 5.7$	$2.85 \times N + 0,65$

<b>Wire to Board Connector (Housing) Dual Row</b>	
Part No.:	<b>T68X006</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	06.06.2021
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3

