



DATA SHEET

D-SUB / Stamped Pin / PCB-Straigt-Pin / Hole in Shell / Female

Serie: T24E2008

D-SUB / Stamped Pin / PCB-Straigt-Pin /
Hole in Shell / Female

Serie No.: **T24E2008**

| | | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|----------|------------|-----------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 05.02.2023 | Customer: |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | 1 from 5 | | |


EDCON-COMPONENTS



Technical Informations

| | |
|----------------------------------|---|
| Material | |
| Insulator | PBT +30% GF rated UL-94-V0 |
| Contact: | Brass C3602 |
| Shell: | Steel |
| Rivet / Boardlock:: | Copper Alloy |
| | |
| Contact Plating: | Gold Flash over 40µ Nickel on all area, Contact area see Ordering |
| Solder Tail Area: | 80µ Tin/Lead |
| Electrical | |
| Opening Voltage: | 250VAC max. |
| Current Rating: | 3,0A max. |
| Contact Resistance: | 15m Ω max. |
| Insulation Resistance: | 3000M Ω min. @ 500VDC |
| Dielectric withstanding Voltage: | 1000VAC 1 Minute |
| | |
| Mechanical: | |
| Operating Temperature Range: | .-55°C to + 105°C |

Technical Dimensions (mm)

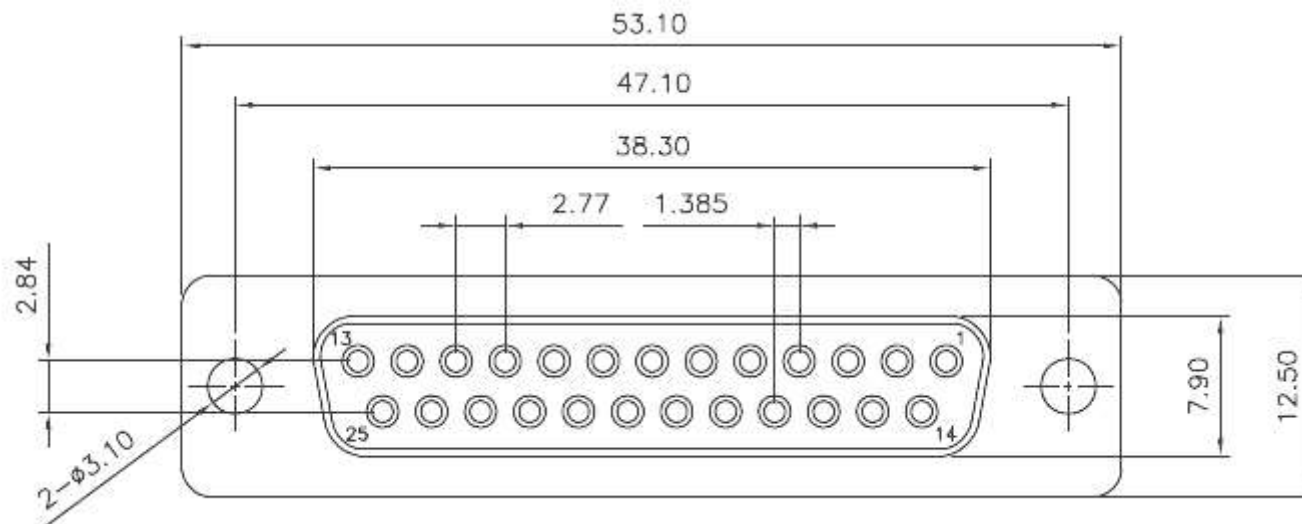

Tolerances unless otherwise specified (mm)

| X | X.X | X.XX | X.XXX | Angle |
|------|------|------|-------|-------|
| ±0,5 | ±0,3 | ±0,2 | ± | ±5° |

D-SUB / Stamped Pin / PCB-Straight-Pin / Hole in Shell / Female

Part No.: **T24E2008**



| | | | | | | | | | |
|-------|--------|----------------|--------|--------|--------|-----------|-----------|----------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 05.02.2023 |
| APPD: | Schumi | 182AE15MGPFEA3 | | FINISH | Jamy | | Sheet No. | 2 from 5 | |

Customer:


EDCON-COMPONENTS



Technical Dimension (mm)

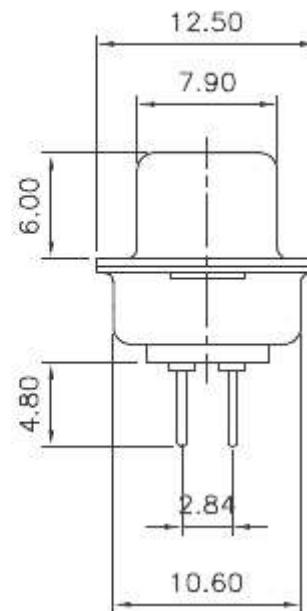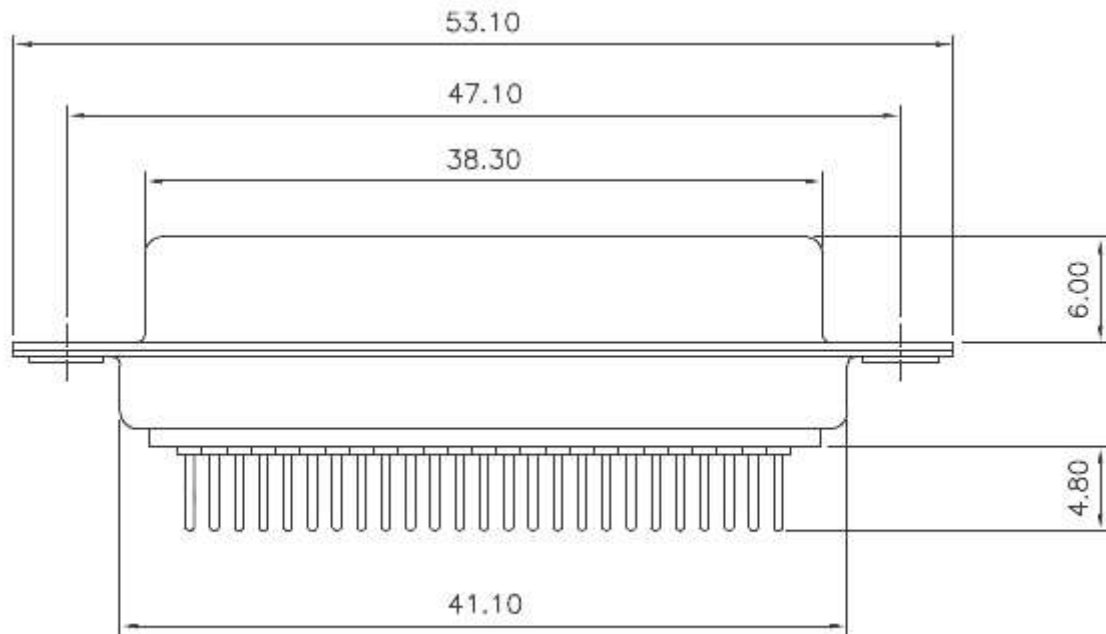

PCB-Layout (TOP-VIEW) Tolerances +/- 0,10mm

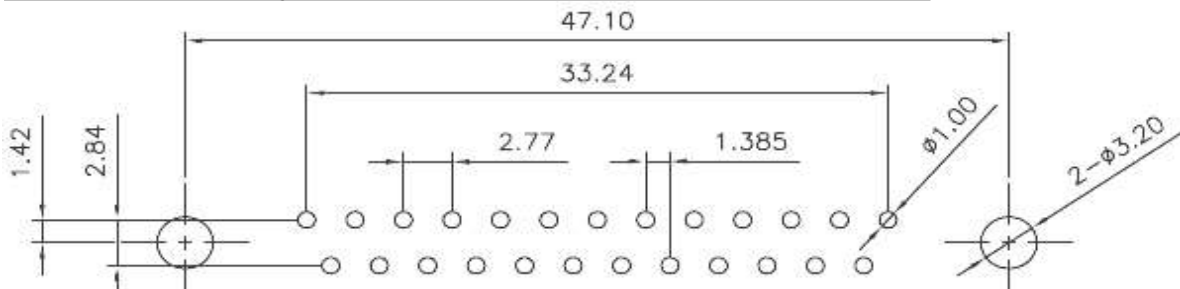

D-SUB / Stamped Pin / PCB-Straight-Pin / Hole in Shell / Female

Part No.: **T24E2008**

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 05.02.2023 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | | 3 from 5 |

Customer:

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

| Serie | No of Pin | Contact Type | Contact Plating | Shell Plating | Process Option | Parts Option | Contact Inserting Optio | Insulator Colour | ROHS | Packing Code |
|-------|-----------|--------------|-----------------|---------------|----------------|--------------|-------------------------|------------------|------|--------------|
|-------|-----------|--------------|-----------------|---------------|----------------|--------------|-------------------------|------------------|------|--------------|

| | | | | | | | | | | |
|-----------------|-----------|----------|-----------|----------|----------|----------|----------|-----------|----------|-----------|
| T24E2008 | 25 | F | SF | T | A | A | A | WH | R | TY |
|-----------------|-----------|----------|-----------|----------|----------|----------|----------|-----------|----------|-----------|

| | | | | | | | | | |
|-------------------|------------------|------------------------------------|------------------------|------------------------|--------------------------|--------------------------------|-------------------------|----------------------------|-------------------------------|
| 25= 25Pos. | F= Female | SF= Gold flash (Standard)1μ | T= Tin + Dimple | A= Through Hole | A= No accessories | A= Fully loaded contact | WH= White Colour | R= ROHS Conform | TY= Tray Packing |
| | | S1= Selective 3μ AU | | | | | BK= Black Colour | N= NON ROHS Conform | |
| | | S2= Selectiv 5μ AU | | | | | BL= Blue Colour | | BU= Bulk-Ware |
| | | S3= Selectiv 15μ AU | | | | | | | IV= Individual Package |
| | | S4= Selectiv 30μ AU | | | | | | | |

D-SUB / Stamped Pin / PCB-Straigt-Pin / Hole in Shell / Female

Part No.: **T24E2008**

| | | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|----------|------------|-----------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 05.02.2023 | Customer: |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | 4 from 5 | | |



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)



| | |
|---|-----------------|
| D-SUB / Stamped Pin / PCB-Straight-Pin / Hole in Shell / Female | |
| Part No.: | T24E2008 |
| Customer: | |

| | | | | | | | | | |
|-------|--------|-------|--------|---------|--------|------------|-----------|-------|------------|
| DRW: | Jason | CHKD: | Wilson | MATL: | Wilson | TOLERANCE: | Mason | DATE: | 05.02.2023 |
| APPD: | Schumi | | | FINISH: | Jamy | | Sheet No. | | 5 from 5 |