



DATA SHEET

D-SUB / Stamped Pin / Right-Angle 7,2mm US-Norm / Front-Rivet 5,8mm w. OPEN-HEX-RIVET / Female

Serie: T24E4033

**D-SUB / Stamped Pin / Right-Angle
7,2mm US-Norm / Front-Rivet 5,8mm w.
OPEN-HEX-RIVET / Female**

Serie No.: T24E4033

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 07.02.2023 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | | 1 from 5 |

Customer:


EDCON-COMPONENTS



Technical Informations

| | |
|----------------------------------|---|
| Material | |
| Insulator | PBT +30% GF rated UL-94-V0 |
| Contact: | Brass |
| Shell: | Steel |
| Rivet / Boardlock:: | Copper Alloy |
| | |
| Contact Plating: | Gold Flash over 40µ Nickel on all area, Contact area see Ordering |
| | |
| Electrical | |
| Opening Voltage: | 250VAC max. |
| Current Rating: | 3,0A max. |
| Contact Resistance: | 15m Ω max. |
| Insulation Resistance: | 3000M Ω min. @ 500VDC |
| Dielectric withstanding Voltage: | 1000VAC 1 Minute |
| | |
| Mechanical: | |
| Operating Temperature Range: | .-55°C to + 105°C |

Technical Dimensions (mm)

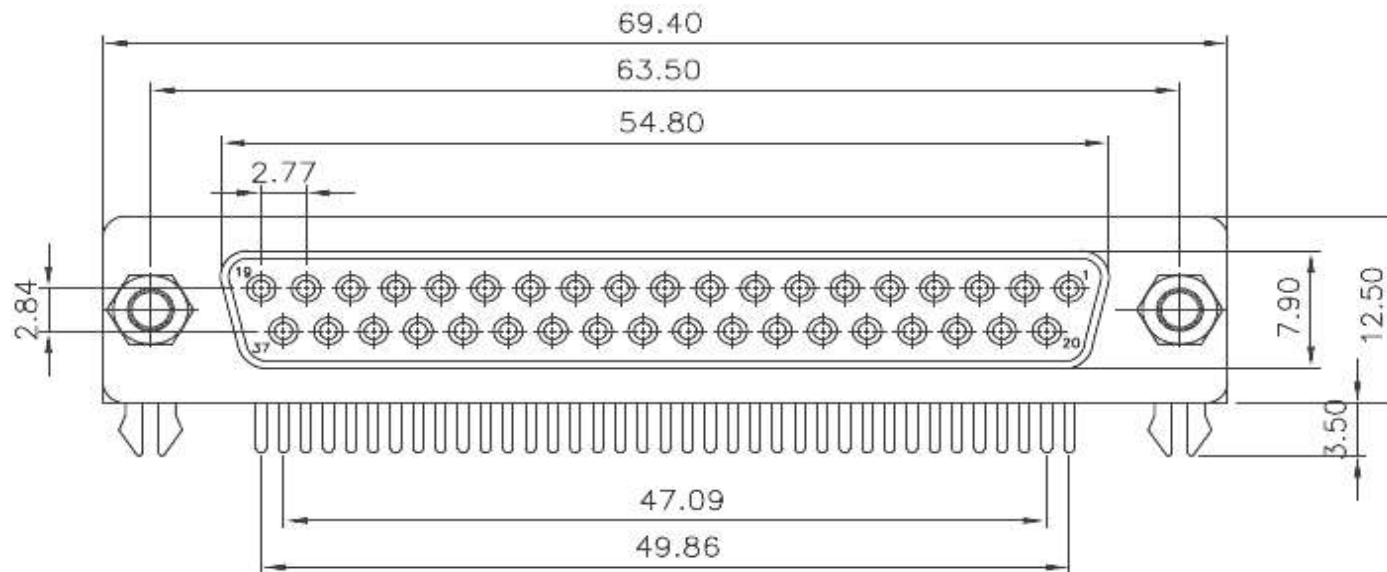

Tolerances unless otherwise specified (mm)

| X | X.X | X.XX | X.XXX | Angle |
|------|------|------|-------|-------|
| ±0,5 | ±0,3 | ±0,2 | ± | ±5° |

D-SUB / Stamped Pin / Right-Angle
7,2mm US-Norm / Front-Rivet 5,8mm w.
OPEN-HEX-RIVET / Female

Part No.: **T24E4033**

| | | | | | | | | | |
|-------|--------|-----------------|--------|--------|--------|-----------|-----------|----------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 07.02.2023 |
| APPD: | Schumi | 182AE15MGPF EA3 | | FINISH | Jamy | | Sheet No. | 2 from 5 | |

Customer:



www.edcon-components.com

email: info@edcon-components.com


EDCON-COMPONENTS



Technical Dimension (mm)

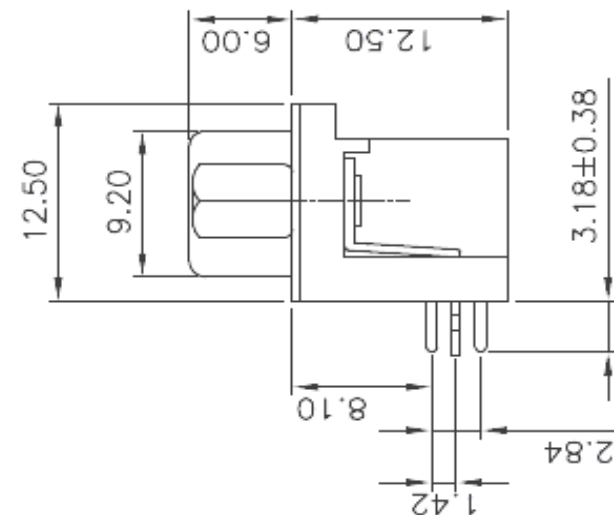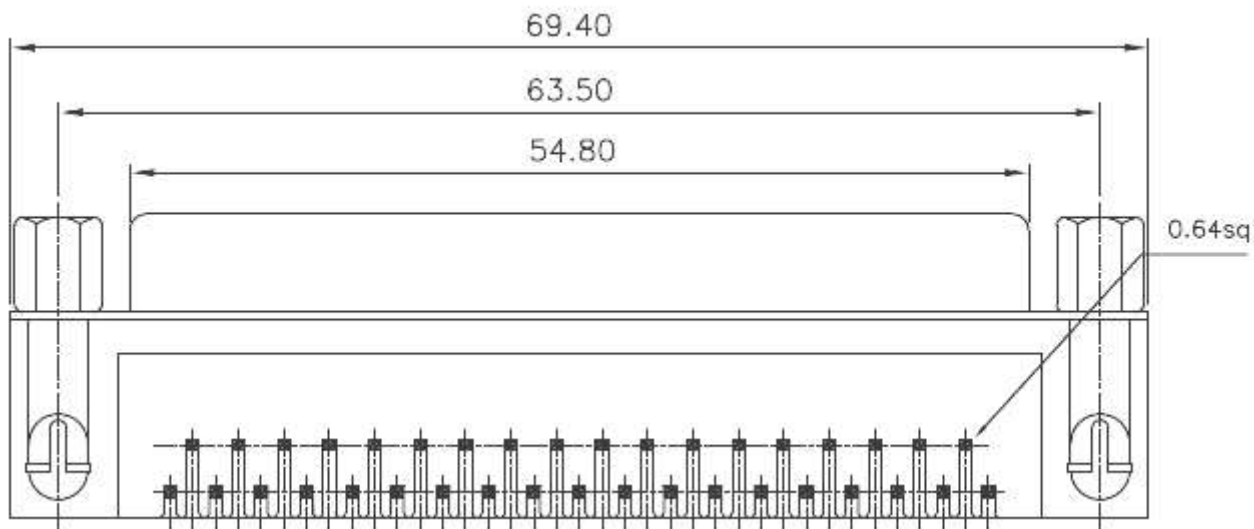

P.C.B. Layout (TOP-VIEW) Tol. 0,10mm

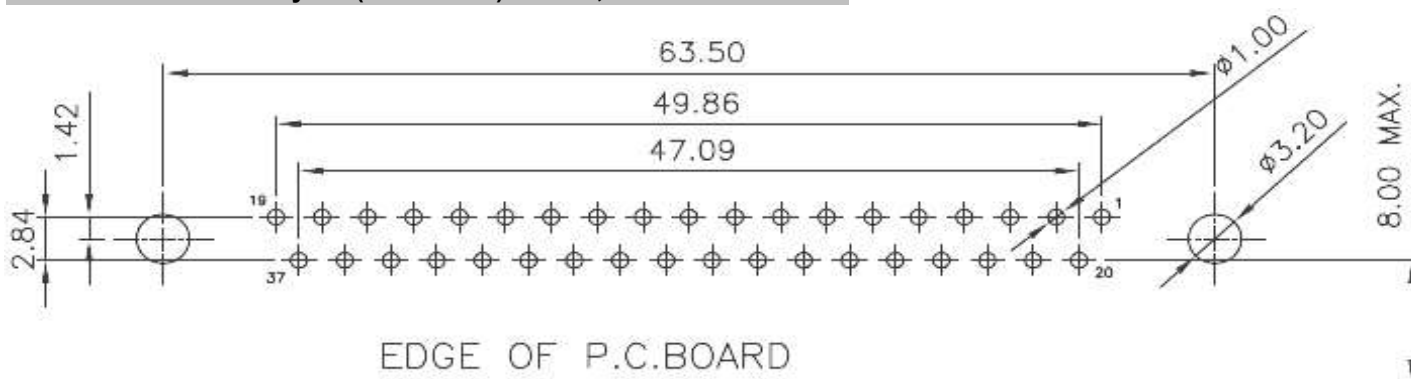

D-SUB / Stamped Pin / Right-Angle
7,2mm US-Norm / Front-Rivet 5,8mm w.
OPEN-HEX-RIVET / Female

Part No.: **T24E4033**

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 07.02.2023 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | | 3 from 5 |

Customer:

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

| Serie | No of Pin | Contact Type | Contact Plating | Shell Plating | Process Option | Parts Option | Parts Option (Screw) | Insulator Colour | ROHS | Packing Code |
|-------|-----------|--------------|-----------------|---------------|----------------|--------------|----------------------|------------------|------|--------------|
|-------|-----------|--------------|-----------------|---------------|----------------|--------------|----------------------|------------------|------|--------------|

| | | | | | | | | | | |
|-----------------|-----------|----------|-----------|----------|----------|----------|----------|-----------|----------|-----------|
| T24E4033 | 37 | F | SF | T | B | F | A | BK | R | TY |
|-----------------|-----------|----------|-----------|----------|----------|----------|----------|-----------|----------|-----------|

| | | | | | | | | | |
|-------------------|------------------|---------------------------------------|------------------------|--------------------------------------|--|--------------------------|-------------------------|----------------------------|-------------------------------|
| 37= 37Pos. | F= Female | SF= Sel. Gold flash (Standard) | T= Tin + Dimple | B= Rivet w. Boardlock Z-Shape | F= Front Rivet 5,8mm / OPEN-HEX-Rivet | A= Non Accessorie | | R= ROHS Conform | TY= Tray Packing |
| | | S1= 3µ AU | | | | | | N= NON ROHS Conform | |
| | | S2= 5µ AU | | | | | BK= Black Colour | | BU= Bulk-Ware |
| | | S3= 15µ AU | | | | | BL= Blue Colour | | |
| | | S4= 30µ AU | | | | | | | IV= Individual Package |

**D-SUB / Stamped Pin / Right-Angle
7,2mm US-Norm / Front-Rivet 5,8mm w.
OPEN-HEX-RIVET / Female**

Part No.: **T24E4033**

| | | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|----------|------------|-----------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 07.02.2023 | Customer: |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | 4 from 5 | | |



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)



D-SUB / Stamped Pin / Right-Angle
7,2mm US-Norm / Front-Rivet 5,8mm w.
OPEN-HEX-RIVET / Female

Part No.: **T24E4033**

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 07.02.2023 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | | 5 from 5 |

Customer: