


# EDCON-COMPONENTS




## Technical Description

**Material:**  
 Insulator: PBT  
 Flammability Rating: UL94-V0  
 Max. Temperature: 220°C / 10Sec.  
 Colour Housing: Black  
 Shell: Steel Tin Plated  
 Environmental:  
 Operating Temperature: -55°C to + 105°C



**Electrical**  
 Current Rating: max. 3A  
 Working Voltage: 125VAC  
 Insulation Resistance: >5000MΩ  
 Dielectric Withst. Voltage: 1000V AC/Min

## Dimension

15P	mm
A	26,39
B	33,32
C	39,14
D	24,00
E	27,51
F	7,50

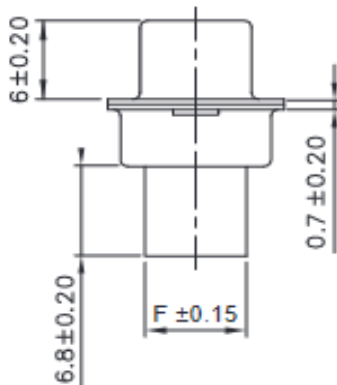

## Drawing

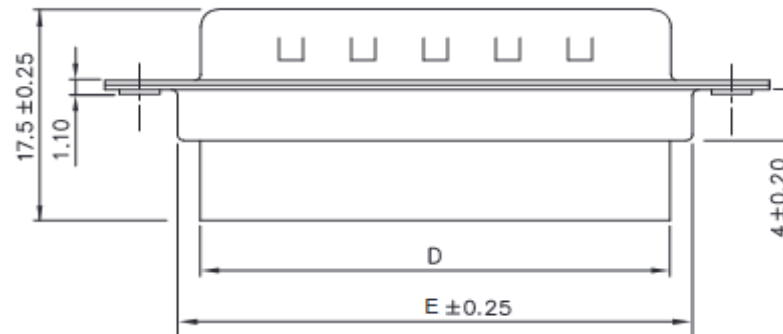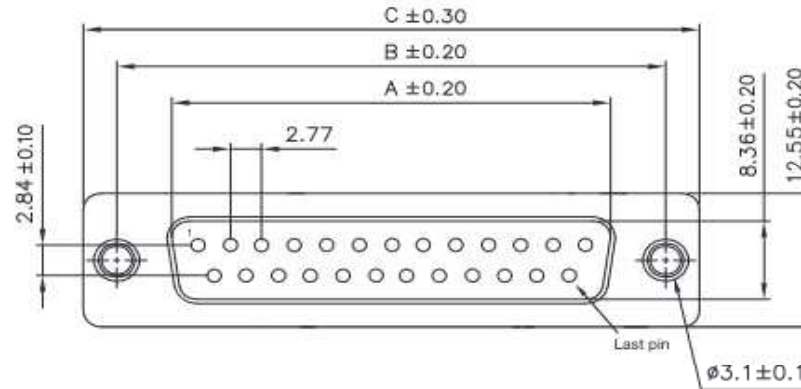

## D-SUB-Crimp-Terminal Housing Male

Part No.: **T24E5002**


Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	08.02.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)

# EDCON-COMPONENTS



## Ordering Informations

Serie	No of contacts	Type	Shell Surface	Special	ROHS	Packing
T24E5002	15	M	TN	00	R	BU
	15= No of Position	M= Male	TN= tinned Shell	00= No function	R= ROHS Conform N= NON ROHS Conform	BU= Bulk-Ware IV= Individual Package

<b>D-SUB-Crimp-Terminal Housing Male</b>	
Part No.:	<b>T24E5002</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	08.02.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 2	