


EDCON-COMPONENTS



Technical Description

Material:


Insulator: PBT
 Flammability Rating: UL94-V0
 Max. Temperature: 220°C / 10Sec.
 Colour Housing: Black
 Shell: Steel Tin Plated
 Environmental:
 Operating Temperature: -55°C to + 105°C

Electrical



Current Rating: max. 3A
 Working Voltage: 125VAC
 Insulation Resistance: >5000MΩ
 Dielectric Withst. Voltage: 1000V AC/Min

Dimension

25P	mm
A	39,80
B	47,04
C	53,04
D	38,00
E	41,28
F	7,40

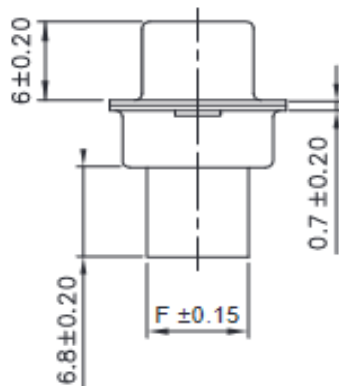

Drawing

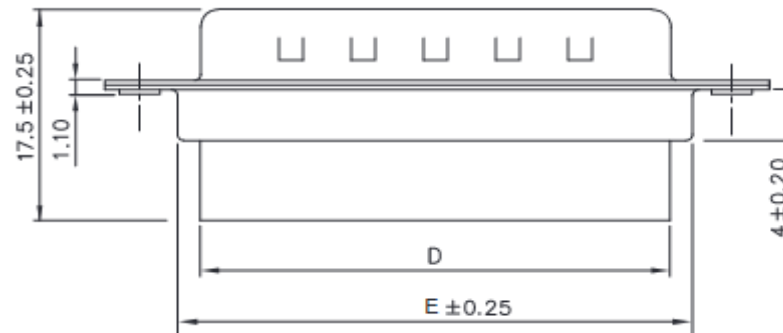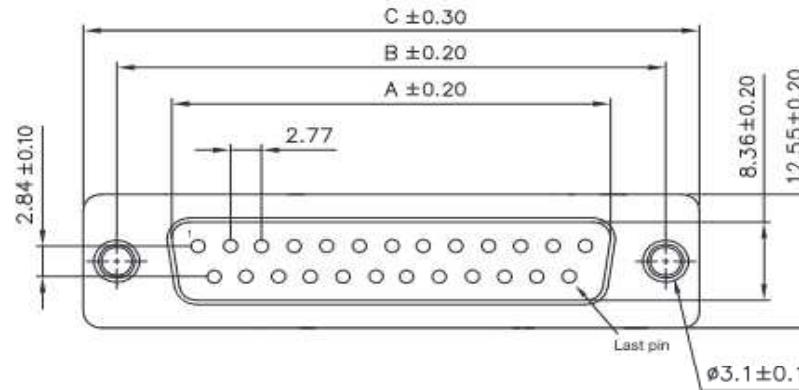


D-SUB-Crimp-Terminal Housing Male

Part No.: **T24E5003**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	08.02.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

EDCON-COMPONENTS



Ordering Informations

Serie	No of contacts	Type	Shell Surface	Special	ROHS	Packing
T24E5003	25	M	TN	00	R	BU

25= No of Position	M= Male	TN= tinned Shell	00= No function	R= ROHS Conform	BU= Bulk-Ware
				N= NON ROHS Conform	IV= Individual Package

**D-SUB-Crimp-Terminal
Housing Male**

Part No.: **T24E5003**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	08.02.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2

Customer: