




### Technical Specification

#### Features

- Closed magnetic circuit structure allows high density mounting on a PCB board, mounting while preventing crosswalk.
- Extremely high reliability due to entirely monolithic construction.
- Low DC resistance structure of electronic to prevent wasteful electric power consumption.
- High current application rating look at range.

#### Dimensions

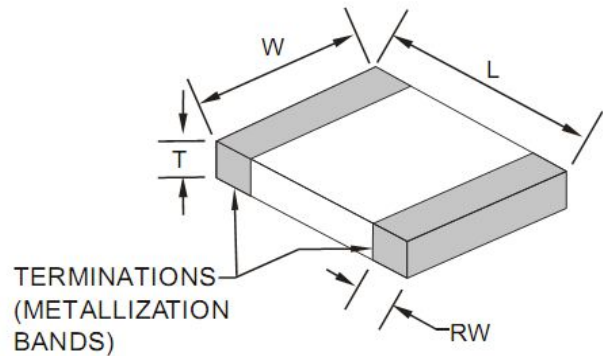

Chip Dimensions		Size Code	Size Dimension
		0402	1005
L (mm)	W (mm)	T (mm)	RW (mm)
1,0±0,15	0,5±0,15	0,85	0,25±0,1

### Specifications / Test conditions

	Test-Cond.	Min	Typ.	Max	Unit	Tol. %	Order Code
Impedance: ( Z )	100 Mhz		600		Ω	25	601
Impedance: ( Z )	1 Ghz		1400		Ω	40	
DC-Resistance: (RDC)		--	0,85	--	Ω		
Rated Current: ( IDC )		--	300	--	mA		301
Operating Temperature: ( °C )		-55°C ~ +125°C					
Tolerance Code:		N	Material Code:	B			

#### Typical Impedance v.s. Frequency Curve:

#### Circuit



In the moment not available

### GHz High Frequency Ferrite Chip Beads

Serie No.: G12044-601-301

Customer:

#### FREQUENCY (Mhz)



DRW:	Johnny	CHKD	Carlo		Wor	DATE	21.02.2023
APPD:	Elva				Vienna	Sheet	1 from 2

Copyright by EDCON S.Tiede



**Soldering Profile for Lead Soldering**

**Soldering Profile for Lead Free Soldering**

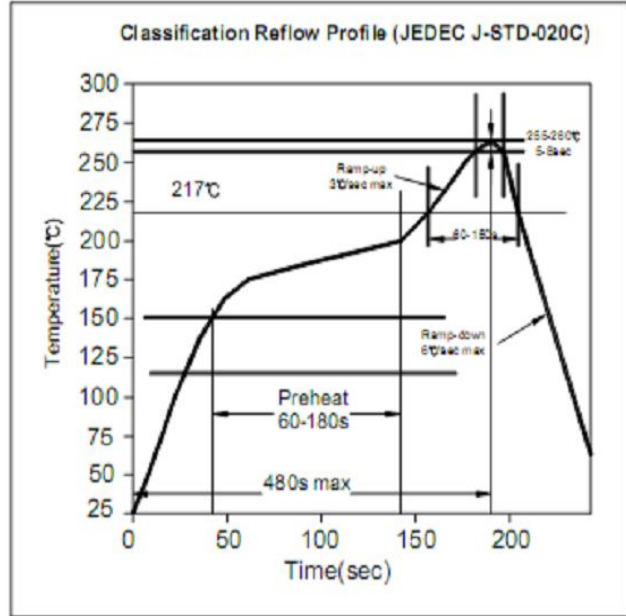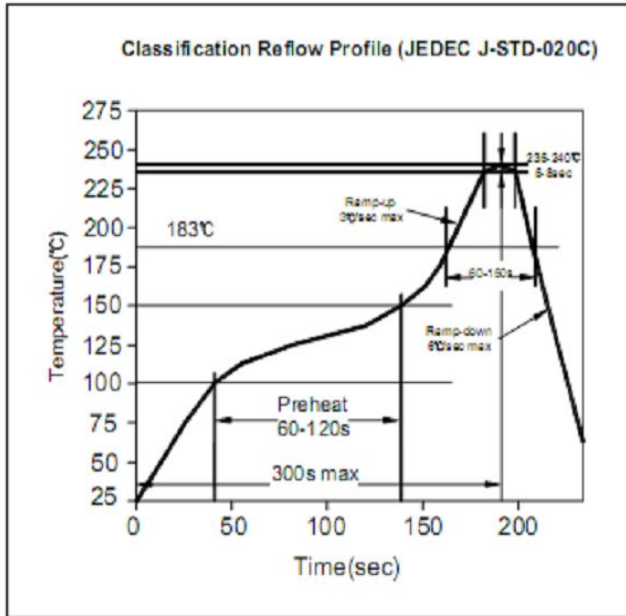

**Ordering Information**

Serie	Tolerance	Special	ROHS	Packing
-------	-----------	---------	------	---------

<b>G12044-601-301</b>	<b>N</b>	<b>X</b>	<b>R</b>	<b>TR</b>
-----------------------	----------	----------	----------	-----------

<b>N=</b> Tolerance 25%	<b>X=</b> No special function	<b>R=</b> ROHS conform	<b>BU=</b> Bulk Ware
		<b>N=NON</b> ROHS conform	
			<b>TR=</b> Tape/Reel

<b>GHz High Frequency Ferrite Chip Beads</b>	
Serie No.:	<b>G12044-601-301</b>
Customer:	

DRW:	Johnny	CHKD	Carlo		Wor	DATE	21.02.2023
APPD:	Elva				Vienna	Sheet	2 from 2

Copyright by EDCON S.Tiede

[www.edcon-components.com](http://www.edcon-components.com)