




Technical Specification

Features

- Closed magnetic circuit structure allows high density mounting on a PCB board, mounting while preventing crosswalk.
- Extremely high reliability due to entirely monolithic construction.
- Low DC resistance structure of electronic to prevent wasteful electric power consumption.
- High current application rating look at range.

Dimensions

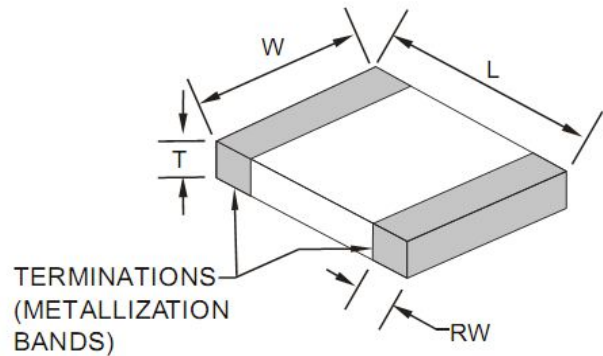

| Chip Dimensions | | Size Code | Size Dimension |
|-----------------|----------|-----------|----------------|
| | | 0603 | 1608 |
| L (mm) | W (mm) | T (mm) | RW (mm) |
| 1,6±0,15 | 0,8±0,15 | 0,5 | 0,3±0,2 |

Specifications / Test conditions

| | Test-Cond. | Min | Typ. | Max | Unit | Tol.% | Order Code |
|-------------------------------|------------|----------------|----------------|-----|------|-------|------------|
| Impedance: (Z) | 100 Mhz | | 300 | | Ω | 25 | 301 |
| Impedance: (Z) | 1 Ghz | | 400 | | Ω | 40 | |
| DC-Resistance: (RDC) | | -- | 0,50 | -- | Ω | | |
| Rated Current: (IDC) | | -- | 200 | -- | mA | | 201A |
| Operating Temperature: (°C) | | -55°C ~ +125°C | | | | | |
| Tolerance Code: | | N | Material Code: | A | | | |

Typical Impedance v.s. Frequency Curve:

Circuit



In the moment not available

GHz High Frequency Ferrite Chip Beads

Serie No.: G12045-301-201A

Customer:

FREQUENCY (Mhz)



| | | | | | | | |
|-------|--------|------|-------|--|--------|-------|------------|
| DRW: | Johnny | CHKD | Carlo | | Wor | DATE | 21.02.2023 |
| APPD: | Elva | | | | Vienna | Sheet | 1 from 2 |

Copyright by EDCON S.Tiede



Soldering Profile for Lead Soldering

Soldering Profile for Lead Free Soldering

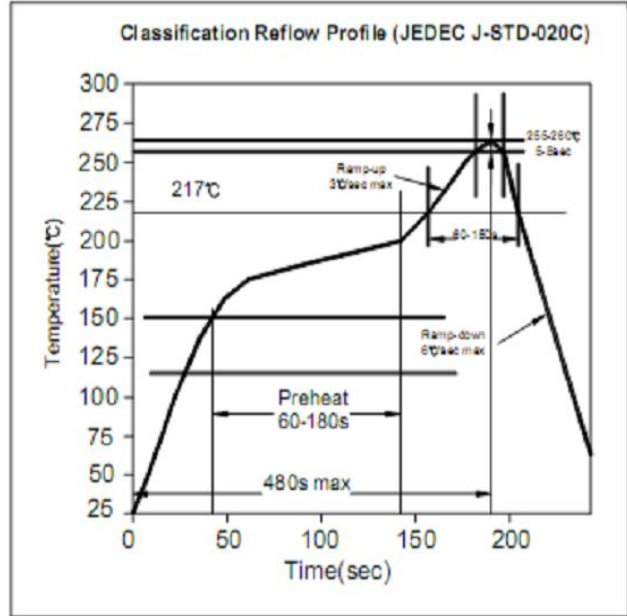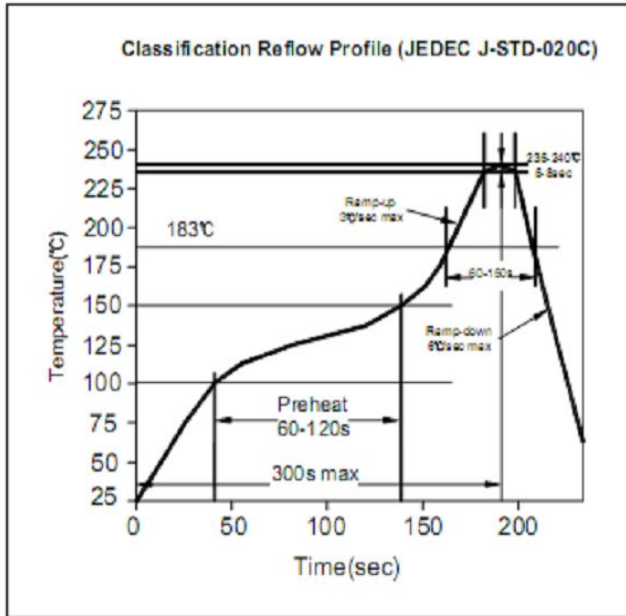

Ordering Information

| Serie | Tolerance | Special | ROHS | Packing |
|-------|-----------|---------|------|---------|
|-------|-----------|---------|------|---------|

| | | | | |
|-----------------|---|---|---|----|
| G12045-301-201A | N | X | R | TR |
|-----------------|---|---|---|----|

| | | | |
|------------------|------------------------|--------------------|---------------|
| N= Tolerance 25% | X= No special function | R= ROHS conform | BU= Bulk Ware |
| | | N=NON ROHS conform | |
| | | | TR= Tape/Reel |

| GHz High Frequency Ferrite Chip Beads | |
|--|-----------------|
| Serie No.: | G12045-301-201A |
| Customer: | |

| | | | | | | | |
|-------|--------|------|-------|--|--------|-------|------------|
| DRW: | Johnny | CHKD | Carlo | | Wor | DATE | 21.02.2023 |
| APPD: | Elva | | | | Vienna | Sheet | 2 from 2 |

Copyright by EDCON S.Tiede