



DATA SHEET

4mm Golden Connector Female / Solder Lug

Serie: T97073

**4mm Golden Connector
Female / Solder Lug**

T97073

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	24.04.2025
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3


Customer:

EDCON-COMPONENTS



Technical Description

Metal Material:	Copper Plated
Instantaneous Current:	32A
Recommend wire Gauge:	16AWG
Rated Current:	16A
Rated Voltage:	30VAC ~ 60VDC
Insulation Material:	PVC
Contact Resistance:	0,45mΩ
Operating Temperature:	.-20°C to +120°C
Rated Voltage:	DC 500V
Recommend usage:	1000 Times
Flame Retardant rating:	UL94V-0
Connecting Type for Cable:	solder Lug

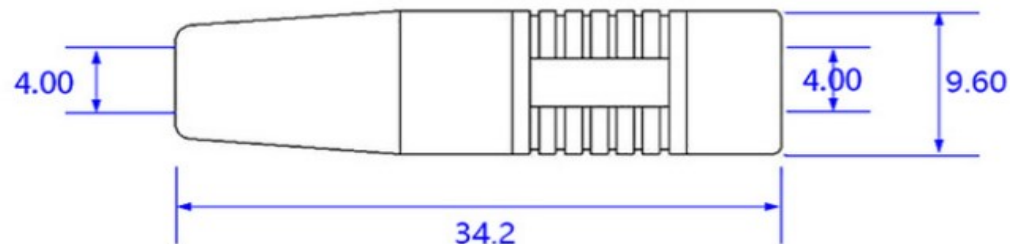

**4mm Golden Connector
Female / Solder Lug**

Part No.: **T97073**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	24.04.2025	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3	

www.edcon-components.com

email: info@edcon-components.com

Copyright by S.Tiede

EDCON-COMPONENTS



Ordering Informations

EDCON-Serie	Body Colour	Special function	Special function	ROHS	Packing Code					
T97073	YE	N	N	R	BU					

YE= Yellow	YE= Yellow	N= No special function	R= ROHS Conform	BU= Bulk-Ware
GN= Green			N= NON ROHS Conform	TY= Tray Package
BL= Blue				IV= Individual Package
BK= Black				
RD= Red				

**4mm Golden Connector
Female / Solder Lug**

Part No.: **T97073**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	24.04.2025
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	

Customer:

www.edcon-components.com

email: info@edcon-components.com