






EDCON-COMPONENTS



SPECIFICATION:

Current Rating:	0,1A / 30VDC
Insulator Resistance:	100 Megaohm / min. 250VDC
Dielectric Withstanding:	AC 125V / 1 Minute
Operating Temperature:	.-25°C to +65°C
Contact Material:	Copper, Alloy
Insulator Material:	Polyester, UL 94V-0
Standard:	P.B.T.
Contact Plating:	Tin, Gold or Selective Plated
Standard:	Gold Flash Overall
Operating Force:	160gr / +/- 80gr.
Mechanical Lifetime:	100.000cycles
Electrical Lifetime:	10.000cycles
Switch function	Non-Lock / Lock Type

Drawing

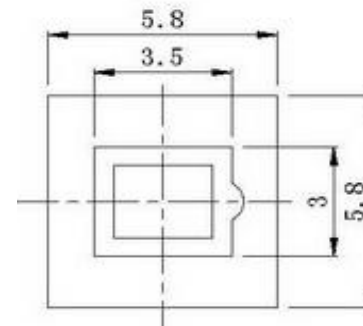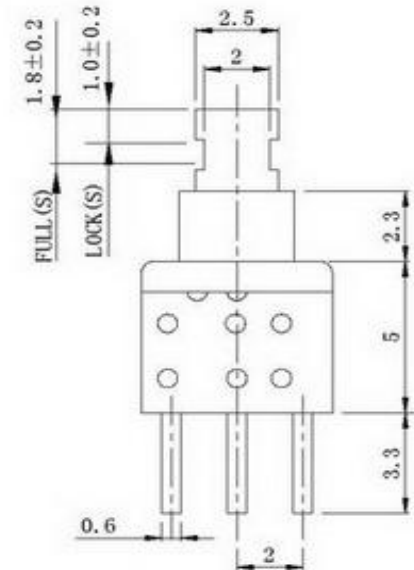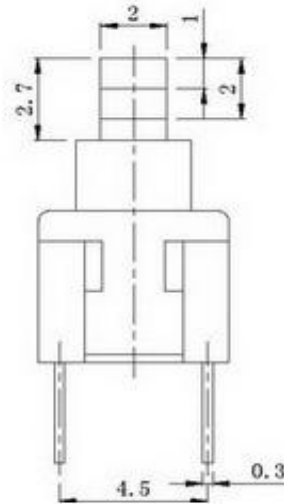

**PCB Pushbutton Switch
5,8x5,8mm**

Part No.: **Q23002**

Customer:


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	22.12.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2	

www.edcon-components.com

email: info@edcon-components.com

Copyright by S.Tiede

EDCON-COMPONENTS



Ordering Informations

Serie	Total height w. Body	Switch function	Operating Force	Special function	Electrical life	Special function	ROHS	Packing		
Q23002	225	N	161	N	104	X	R	BU		

225= 22,5mm	L= Look Type	160 = 160gr	X= No Special function		X= No Special function	N= Non ROHS	BU= Bulk Ware
	N= Non Look Type					R= ROHS conform	
				104= 100000 cycles			

**PCB Pushbutton Switch
5,8x5,8mm**

Part No.: **Q23002**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	22.12.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2

Customer: