


EDCON-COMPONENTS





SPECIFICATION:

Current Rating:	0,3A / 30VDC
Insulator Resistance:	100 Megaohm / min. 250VDC
Dielectric Withstanding:	AC 250V / 1 Minute
Operating Temperature:	.-15°C to +55°C
Contact Material:	Copper, Alloy
Insulator Material:	Polyester, UL 94V-0
Standard:	P.B.T.
Contact Plating:	Tin, Gold or Selective Plated
Standard:	Gold Flash Overall
Operating Force:	200gr / +/- 80gr.
Mechanical Lifetime:	100.000cycles
Electrical Lifetime:	10.000cycles
Switch function	Non-Lock / Lock Type

Drawing

Operating Travel : lock travel 1.5mm
full travel 2.5mm

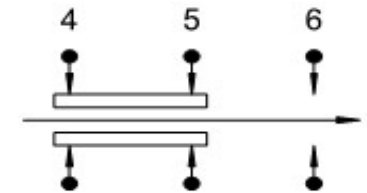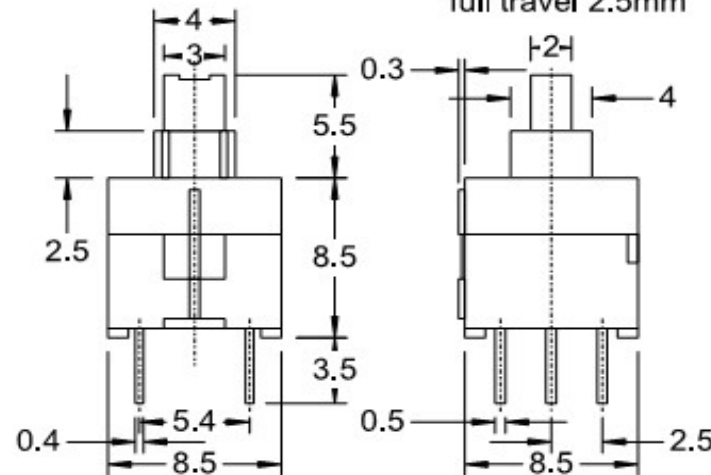

Pushbutton Switch

Part No.: **Q23004**

Customer:


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	22.12.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2	

www.edcon-components.com

email: info@edcon-components.com

Copyright by S.Tiede

EDCON-COMPONENTS



Ordering Informations

Serie	Total height w. Body	Switch function	Operating Force	Special function	Electrical life	Special function	ROHS	Packing		
Q23004	140	N	201	N	104	X	R	BU		

140 = 14,0mm	L = Look Type	201 = 200gr	X = No Special function		X = No Special function	N = Non ROHS	BU = Bulk Ware
	N = Non Look Type					R = ROHS conform	
				104 = 100000 cycles			

Pushbutton Switch

Part No.: **Q23004**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	22.12.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 2	

www.edcon-components.com

email: info@edcon-components.com