


EDCON-COMPONENTS





SPECIFICATION:

Current Rating:	0,1A / 30VDC
Insulator Resistance:	100 Megaohm min.
Dielectric Withstanding:	AC 125V / 1 Minute
Operating Temperature:	.-25°C to +65°C
Contact Material:	Copper, Alloy
Insulator Material:	Polyester, UL 94V-0
Standard:	P.B.T.
Contact Plating:	Tin, Gold or Selective Plated
Standard:	Gold Flash Overall
Operating Force:	160gr / +/- 80gr.
Mechanical Lifetime:	100.000cycles
Electrical Lifetime:	100.000cycles
Switch function	Non-Lock / Lock Type

look travel 1,5mm
full travel 2,5mm

Drawing Tol. +/- 0,5mm

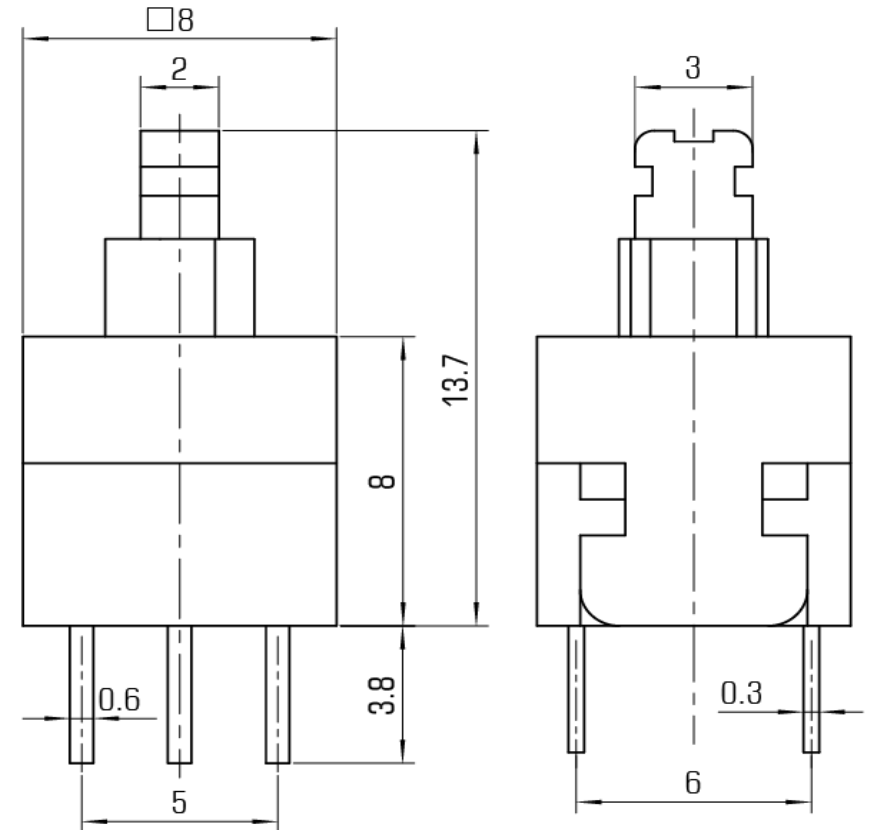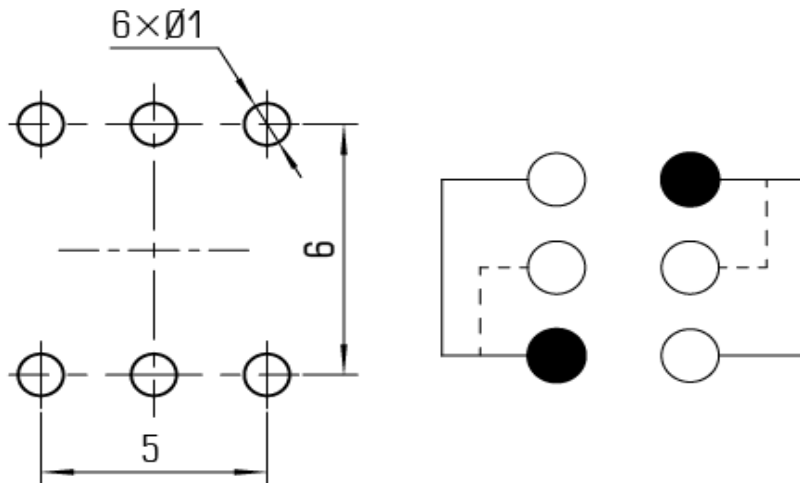

Pushbutton Switch

Part No.: **Q23005**


Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	20.01.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2	

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Total height w. Body	Switch function	Operating Force	Special function	Electrical life	Special function	ROHS	Packing		
Q23005	135	N	181	N	104	X	R	BU		

135 = 13,5mm	L = Look Type	181 = 180gr	X = No Special function		X = No Special function	N = Non ROHS	BU = Bulk Ware
	N = Non Look Type					R = ROHS conform	
				104 = 100000 cycles			

Pushbutton Switch	
Part No.:	Q23005
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	20.01.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 2	

www.edcon-components.com

email: info@edcon-components.com