

EDCON-COMPONENTS




SPECIFICATION:





Current Rating: 0,1A / 30VDC
 Insulator Resistance: 100 Megaohm / min. 500VDC
 Dielectric Withstanding: AC 500V / 1 Minute
 Operating Temperature: -20°C to +550°C
 Contact Material: Copper, Alloy

Insulator Material: Polyester, UL 94V-0
 Standard: P.B.T.
 Contact Plating: Tin, Gold or Selective Plated
 Standard: Gold Flash Overall
 Operating Force: 150gr / 250gr
 Mechanical Lifetime: 100.000cycles
 Electrical Lifetime: 10.000cycles
 Switch function: Non-Lock / Lock Type

PCB Layout

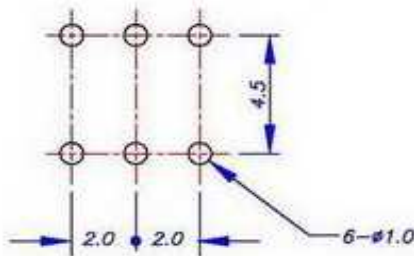

Drawing

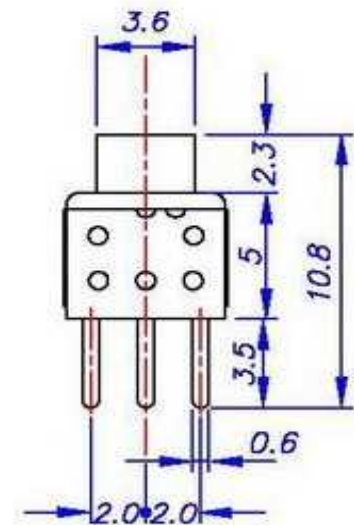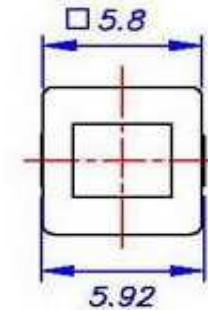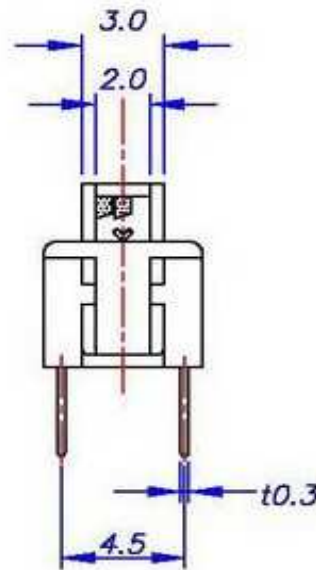

**PCB Pushbutton Switch
5,8x5,8mm**

Part No.: **Q23007**


Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	22.12.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2	

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Total height w. Body	Switch function	Operating Force	Special function	Electrical life	Special function	ROHS	Packing		
Q23007	073	N	251	N	104	X	R	BU		

073 = 7,3mm	L = Look Type	251 = 250gr NON-LOCK	X = No Special function		X = No Special function	N = Non ROHS	BU = Bulk Ware
	N = Non Look Type	151 = 150gr LOCK-Type				R = ROHS conform	
				104 = 100000 cycles			

**PCB Pushbutton Switch
5,8x5,8mm**

Part No.: **Q23007**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	22.12.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 2	

www.edcon-components.com

email: info@edcon-components.com