



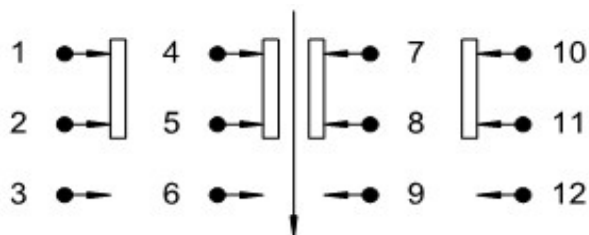

EDCON[®]
COMPONENTS
A MEMBER OF EDCON-GROUP

Current Rating:	0,3A / 60VDC
Insulator Resistance:	100 Megaohm / min. 125VDC
Dielectric Withstanding:	AC 125V / 1 Minute
Operating Temperature:	.-40°C to +70°C
Contact Material:	Copper, Alloy
Contact Resistance:	0,02 Ω max.
Insulator Material:	Polyester, UL 94V-0
Standard:	P.B.T.
Contact Plating:	Tin, Gold or Selective Plated
Standard:	Gold Flash Overall
Operating Force:	100gr ~ 350gr
Mechanical Lifetime:	100.000cycles
Electrical Lifetime:	10.000cycles
Switch function	Non-Lock / Lock Type

Operating Travel : lock travel 1.0mm

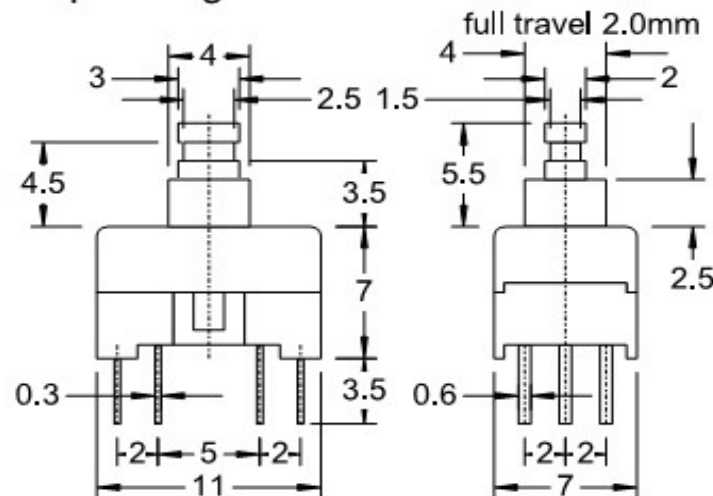

PCB Pushbutton Switch 11,0x7,0mm

Part No.: **Q23020**


Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	22.12.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Total height w. Body	Switch function	Operating Force	Special function	Electrical life	Special function	ROHS	Packing		
Q23020	125	N	101	N	104	X	R	BU		

125= 12,5mm	L= Look Type	101 = 100gr	X= No Special function		X= No Special function	N= Non ROHS	BU= Bulk Ware
	N= Non Look Type	251 = 250gr				R= ROHS conform	
		351 = 350gr		104= 100000 cycles			

**PCB Pushbutton Switch
11,0x7,0mm**

Part No.: **Q23020**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	22.12.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 2	

Customer: