

EDCON-COMPONENTS





SPECIFICATION:



Current Rating: 0,1A / 30VDC
 Insulator Resistance: 100 Megaohm / min. 500VDC
 Dielectric Withstanding: AC 500V / 1 Minute
 Operating Temperature: -20°C to +550°C
 Contact Material: Copper, Alloy

Insulator Material: Polyester, UL 94V-0
 Standard: P.B.T.
 Contact Plating: Tin, Gold or Selective Plated
 Standard: Gold Flash Overall
 Operating Force: 200gr +/- 30gr.
 Mechancal Lifetime: 100.000cycles
 Electrical Lifetime: 10.000cycles
 Switch function: Non-Lock / Lock Type

PCB Layout

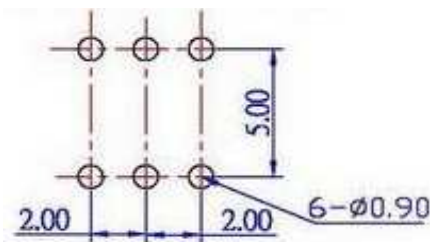

Drawing

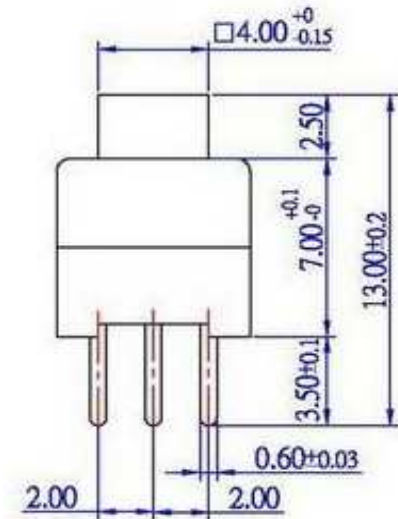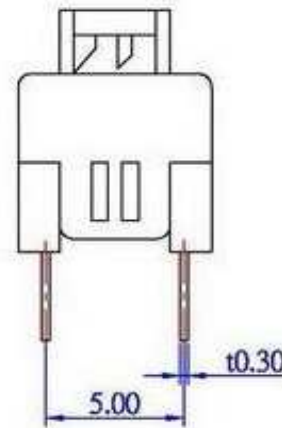


**PCB Pushbutton Switch
7,0x7,0mm**

Part No.: **Q23021**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	22.12.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2	

EDCON-COMPONENTS



Ordering Informations

Serie	Total height w. Body	Switch function	Operating Force	Special function	Electrical life	Special function	ROHS	Packing		
Q23021	095	N	201	N	104	X	R	BU		

095 = 9,5mm	L = Look Type	201 = 200gr	X = No Special function		X = No Special function	N = Non ROHS	BU = Bulk Ware
	N = Non Look Type					R = ROHS conform	
				104 = 100000 cycles			

**PCB Pushbutton Switch
7,0x7,0mm**

Part No.: **Q23021**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	22.12.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 2	

www.edcon-components.com

email: info@edcon-components.com