



DATA SHEET

5Watt Cement Resistor Radial Style

Serie: X43006

5Watt Cement Resistor Radial Style

Serie No.: **X43006**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.01.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 5	

EDCON-COMPONENTS



Specifications

Temperature Coefficient:	< 20Ω: ±400PPM/°C; ≥20Ω: ±350PPM/°C
Short Time Overload:	± (5,0% + 0,05Ω) Max., with no evindence of mechanical damage
Dielectric Withstanding Voltage	No evidence of flashover, mechanical damage, arcing or insulation breakdown.
Terminal Strength:	No evidence of mechanical damage.
Resistance to Soldering Heat:	± (1,0% + 0,05Ω) Max., with no evindence of mechanical damage.
Solderability:	Min. 95% coverage.
Temperature Cycling:	± (2,0% + 0,05Ω) Max., with no evindence of mechanical damage.
Humidity (Steady Style):	± (5,0% + 0,05Ω) Max., with no evindence of mechanical damage.
Load Life in Humidity:	Wire Wound ±(5% + 0,05) Max. Power Film <100KΩ: ±(5,0% + 0,05) Max. ≥100KΩ: ±(10,0% + 0,05) Max.
Load Life	Wire Wound ±(5% + 0,05) Max. Power Film <100KΩ: ±(5,0% + 0,05) Max. ≥100KΩ: ±(10,0% + 0,05) Max.
Max. Working Voltage:	500Volt
Max. Overload Voltage:	1000Volt

5Watt Cement Resistor Radial Style

Part No.: **X43006**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.01.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 5	


Customer:

EDCON-COMPONENTS




Heat Rise Chart


Heat Rise Chart (PRW)

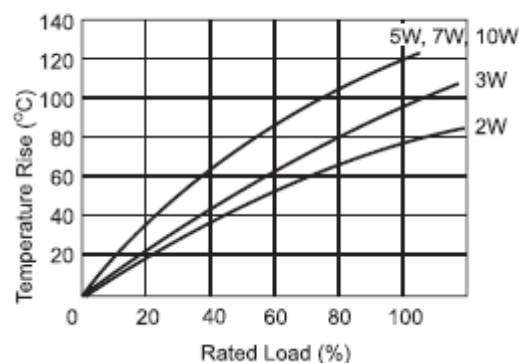

Derating Curve

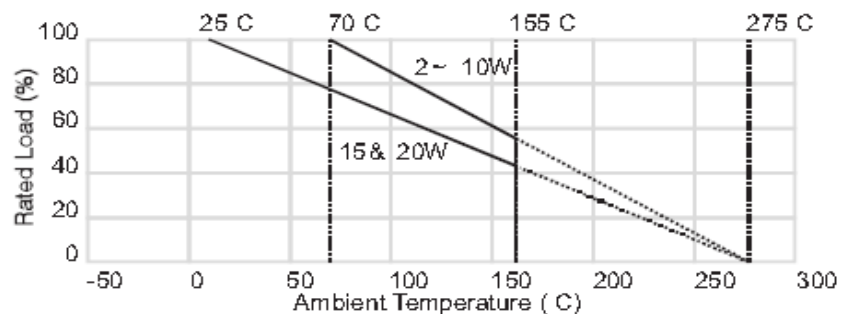

Technical Drawing

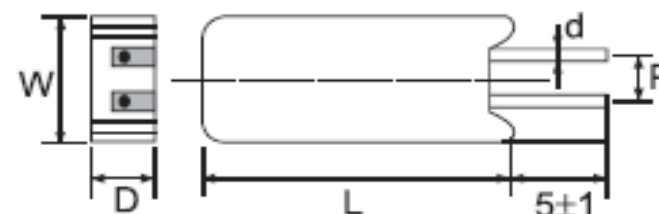

Dimensions

Dimension (mm)					Resistance Range
W±1	D±1	L±1	d±0,05	P±1	Wire Wound
12,5	9	25	0,75	7,5	0,1Ω ~47Ω

5Watt Cement Resistor Radial Style

Part No.: **X43006**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.01.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 5	

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Range	Tolerance	Lead Style	Special	ROHS	Packing Code				
-------	-------	-----------	------------	---------	------	--------------	--	--	--	--

X43006	-	470	K	LL	S	R	BU			
---------------	---	------------	----------	-----------	----------	----------	-----------	--	--	--

470= Range 47Ω	K= Tol. 10%	LL= Long Lead	S= Standard	R= ROHS Conform	BU= Bulk Ware
	J= Tol. 5%	XX= Customer Special	I= Non Inductive	N= NON ROHS Conform	BX= Box Ware
Resistance Range from 0,1Ω ~ 47Ω					

**5Watt Cement Resistor Radial
Style**

Part No.: **X43006**


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.01.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 5	

Customer:



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

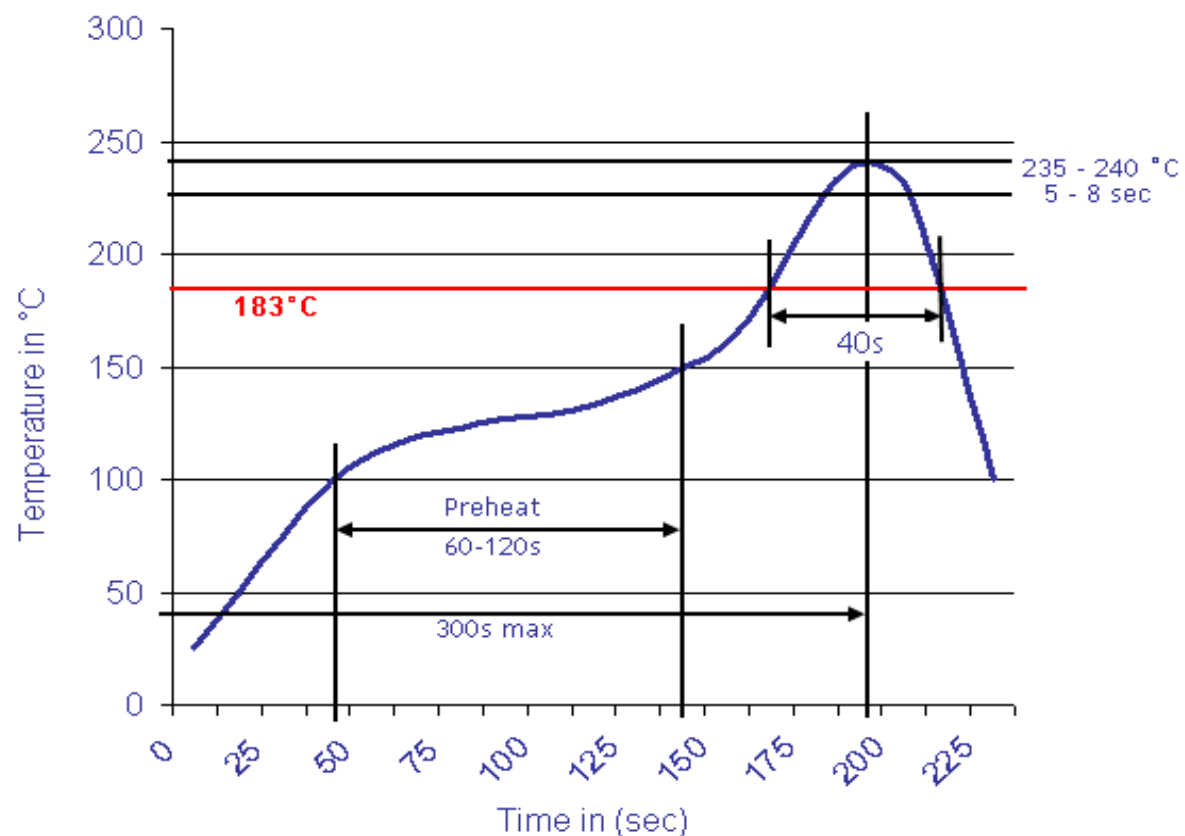
**5Watt Cement Resistor Radial
Style**

 Part No.: **X43006**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.01.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	5 from 5	