

EDCON-COMPONENTS




SPECIFICATION:


Current Rating:	0,2A / 24VDC 0,5A/12VDC
Insulator Resistance:	10000 Megaohm min.
Dielectric Withstanding:	2mA 500VDC for 60Sec.
Operating Temperature:	.-25°C to +70°C
Contact Resistance:	50mΩ Max. After life test 100mΩ max.
Capacitance:	1,5pf Max.
Mechanical Life:	5000 Operations
Minimum Contact Resist.	1mA 10mV

PCB Layout




P.C.B. LAYOUT



Drawing (mm)

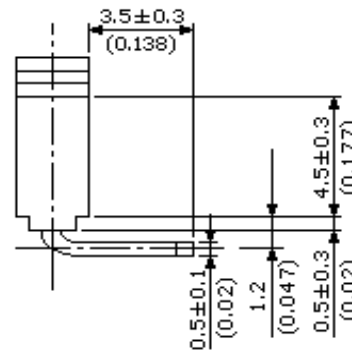

CIRCUIT DIAGRAM

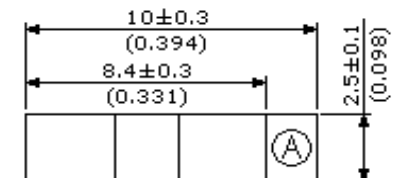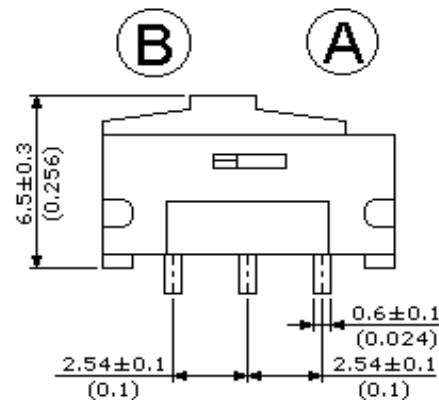

Slide Switch THT

Part No.: **Q13245**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	29.04.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

EDCON-COMPONENTS



Ordering Informations

Serie	Fill with 0	ROHS	Packing							
Q13245	X	R	BU							

X= No function	N= non ROHS	BU= Bulk Ware
	R= ROHS conform	

Slide Switch THT

Part No.: **Q13245**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	29.04.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3	


www.edcon-components.com

email: info@edcon-components.com



Soldering Profile for Lead Soldering

Classification Reflow Profile (JEDEC J-STD-020C)

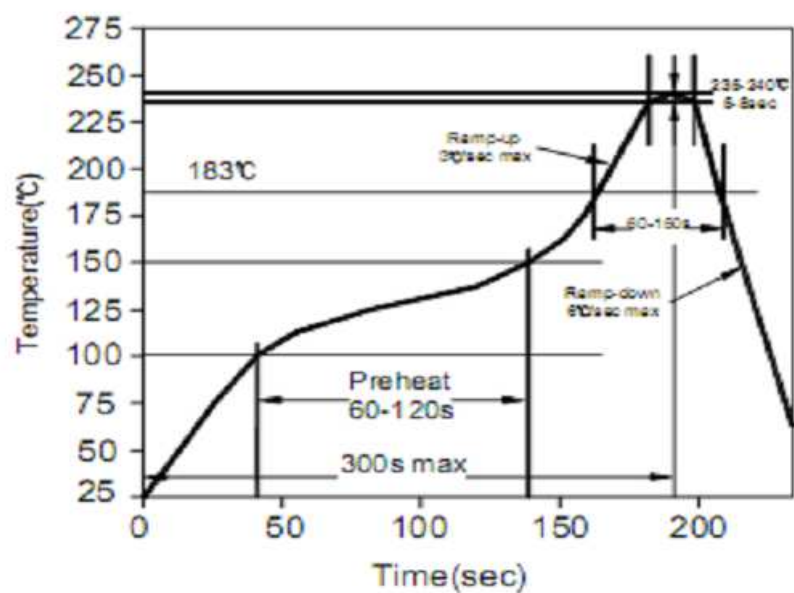

Slide Switch THT

Part No.: **Q13245**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	29.04.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	