

Type Code


CPB43B12-2.9CI:

Chinasound Piezo Buzzer 43mm diameter, type B (=33mm height, 3 terminals), 12VDC rated voltage – 2.9KHz resonant frequency; Continuous & Intermittent tones

Picture



Characteristics

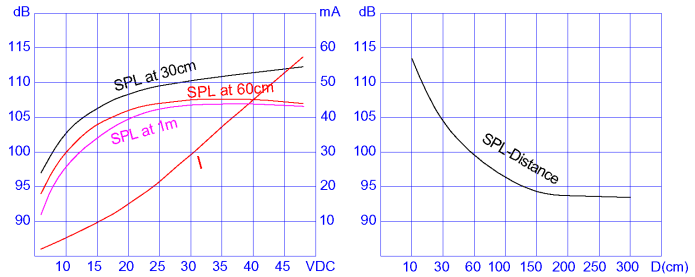

Technical Terms

Type	CPB43B12-2.9CI	
Rated Voltage	(VDC)	12
Operating Voltage	(VDC)	3~20
Rated Current at 12VDC	(mA)	10 max.
Sound Output at 12VDC, 30cm	(dB)	100 min.
Resonant Frequency	(Hz)	2900 ± 500
Tone	Continuous and Intermittent	
Operating Temperature	(°C)	-20~+60
Storage Temperature	(°C)	-30~+70
Weight	(g)	39

Reliability

Life Test	Operate the part at 12VDC in room temperature continuously for 1000 hours.
Operating Temperature	Driving from -20 °C to +60 °C within 30 minutes for 2 cycles
High Temperature	+70 °C+/-2 °C, 120hrs
Low Temperature	-30 °C+/-2 °C, 120hrs
Humidity	+60 °C+/-2 °C, 90~95%RH, 120hrs
Thermal Shock	-30 °C+/-2 °C, 1hr→+20 °C,5min,→+70 °C+/-2 °C, 1hr→+20 °C,5min, 5 cycles
Shock	980/s ² shock for each 3 mutually perpendicular directions to each of 3 times by half sine wave
Vibration	1.5mm with 10 to 50Hz of vibration frequency to each of 3 perpendicular direction for 2 hrs
Drop Test	Dropped naturally from 700mm height onto the surface of 10mm thick wooden board. 2 directions - upper and side of the part are to be applied.

All specifications must be satisfied after the test (Recovery:2 to 4 hrs of recovery under the standard condition after the removal from test chamber)

Dimensions (Unit:mm)

