



DATA SHEET

Metallized polypropylene film capacitor (Box-Type)

Serie: I37006

Code / Range **333= 0,033µf**

Code / Volt **162= 1600VDC**

Width **17,5 mm**

Height **16,0 mm**

Thickness **10,0 mm**

Pitch **15,0 mm**

Metallized polypropylene film capacitor (Box-Type)

Serie No.: **I37006**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.05.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

EDCON-COMPONENTS




Features

Metallized Polypropylen structure
Low Loss at high frequency
Small inherent temperature rise
Plastic case (UL94V-0), Epoxy resin sealing

Dimensions

Specifications

Reference Standard	GB/T 10190 (IEC 60384-16)
Climatic Category	40/105/21
Rated Temperature	. +85°C
Operating Temperature Range	. -40°C ~ +105°C (+85°C to +105°C ; decreasing factor 1,25% per °C for V _R (dc))
Rated Voltage	160Vdc(90Vac); 250Vdc(160Vac); 400Vdc(220Vac); 630Vdc(250Vac); 1000Vdc(400Vac); 1600Vdc(600Vac); 2000Vdc(700Vac)
Capacitance Range	0,00056μF ~ 15,0μF
Capacitance Tolerance	J=5%, K=10%, N=15%
Voltage Proof	2000VAC (60s)
Dissipation Factor	≤ 0,0020 (1KHz, 20°C)
Insulation Resistance	≥ 3000s (20°C, 100V, 1Min)
Pitch Width	from 5,0mm ~ 27,5mm

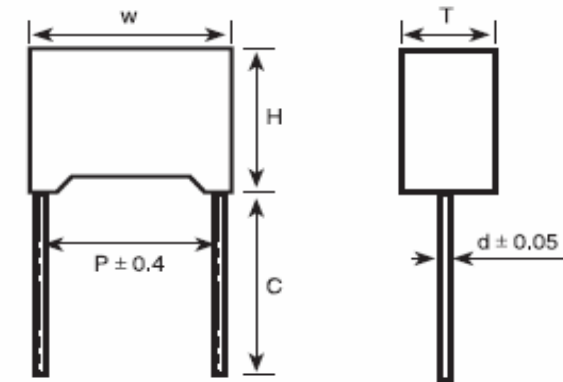

Case Dimension table

Case Code	W ±0,4 (mm)	H ±0,4 (mm)	T ±0,4 (mm)	P (mm)
A	17,5	16,0	10,0	15,0

C ±0,5 (mm)

Standard Length 18~26mm (Size by Size)

Short Lead 4,5mm

d ±0,05 (mm)

d= 0,8mm

Metallized polypropylene film capacitor (Box-Type)

Part No.: **I37006**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.05.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 4

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Range	Tolerance	Voltage	Case Code	Pitch Code	Lead Style	Lead Length C	ROHS	Packing Code	
-------	-------	-----------	---------	-----------	------------	------------	---------------	------	--------------	--

I37006	-	333	M	162	A	6	N	LL	R	BU
---------------	---	------------	----------	------------	----------	----------	----------	-----------	----------	-----------

333 = 0,033µf	M = 20% Standard	162 = 1600VDC	A = look Case Dimension	6 = 15,0mm	N = No function	LL = Long Lead (Standard)	R = ROHS Conform	BU = Bulk Ware
	K = 10%					45 = Lead Length 4,5mm	N = NON ROHS Conform	TB = Tape Box
	J = 5%							IV = Individual Package
	H = 3%							
	G = 2%							

**Metallized polypropylene film
capacitor (Box-Type)**

Part No.: **I37006**


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.05.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 4	

Customer:
email: info@edcon-components.com



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

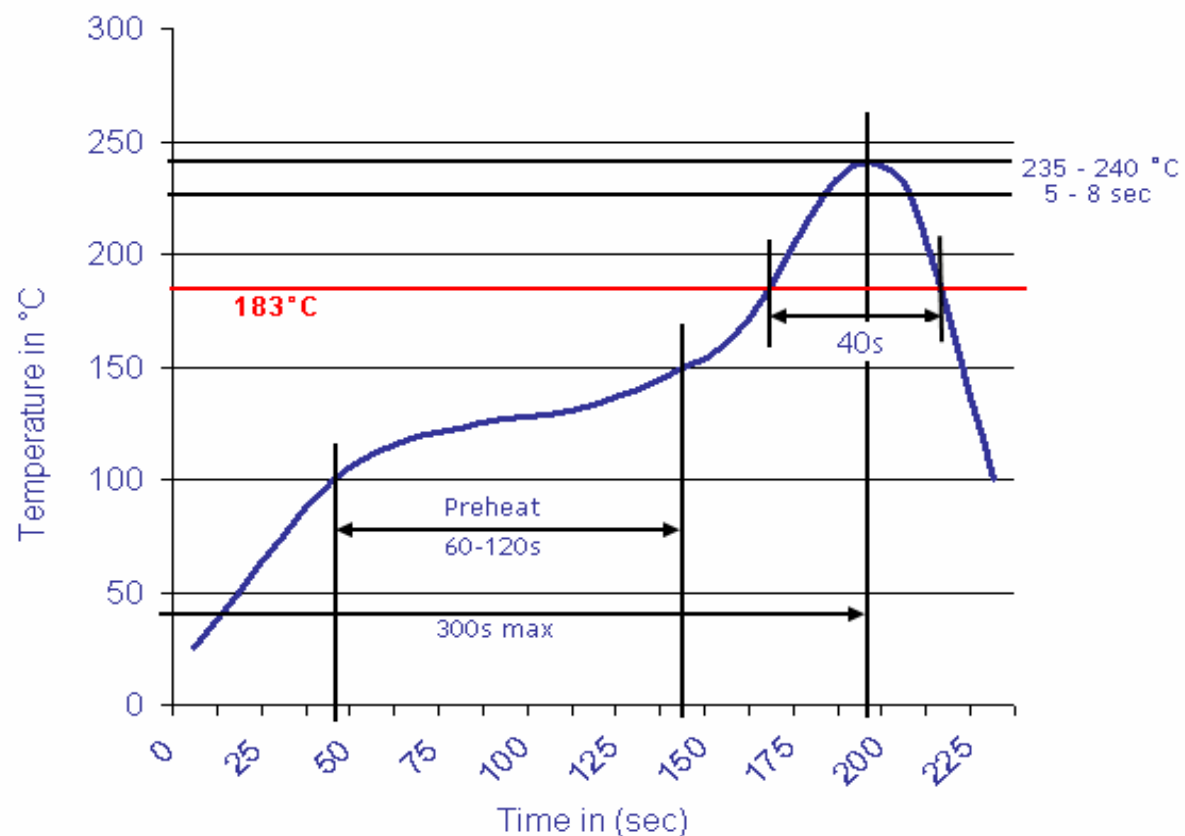
**Metallized polypropylene film
capacitor (Box-Type)**

 Part No.: **I37006**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.05.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	

 Customer:
 email:info@edcon-components.com