



DATA SHEET

Double sided metallized polypropylene film capacitor Box

Serie: I42006

Code / Range **153= 0,015µf**

Code / Volt **202= 2000VDC**

Width **26,5 mm**

Height **16,0 mm**

Thickness **7,0 mm**

Pitch **22,5 mm**

**Double sided metallized
polypropylene film capacitor
Box**

Serie No.: **I42006**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	26.05.2011	Customer:
APPD:	Schumi			FINISH	Jamy			Sheet No.	1 from 4	

EDCON-COMPONENTS



Features

Doublesided metallized polypropylen structure
Low loss and small inherent temperature rise
Negative temperature coefficient of capacitance
Excellent active and passive flame resistance circuit


Applications

widely used in high voltage, high frequency and pulse circuit
Deflection circuits in TV-sets (S-correction and fly back tuning) and monitors
Lamp capacitor for electronic ballast and compact lamps
SNUBBER and SCR commutating circuits

Specifications

Reference Standard	GB/T 10190 (IEC 60384-16)	
Climatic Category	40/105/56	
Rated Temperature	. +85°C for V_R (dc); 75°C for V_R (ac)	
Operating Temperature Range	. -40°C ~ +105°C (+85°C to +105°C ; decreasing factor 1,25% per °C for V_R (dc) (+75°C to +105°C: decreasing factor 1,35% per °C for V_R (ac)	
Rated Voltage	250V, 400V, 630V, 1000V, 1600V, 2000V	
Capacitance Range	0,00022 ~ 3,9μF	
Voltage Proof (Between Terminals)	1.60U _R (5s)	
Capacitance Tolerance	G=2%, H=3%, J=5% , K=10%, M=20%	
Dissipation Factor	≤ 0,0010 (1kHz, 20°C)	
Insulation Resistance	≥ 50000MΩ C _R ≤0,33μF	(20°C, 100V, 1min
	≥ 15000s C _R >0,33μF	

Dimensions

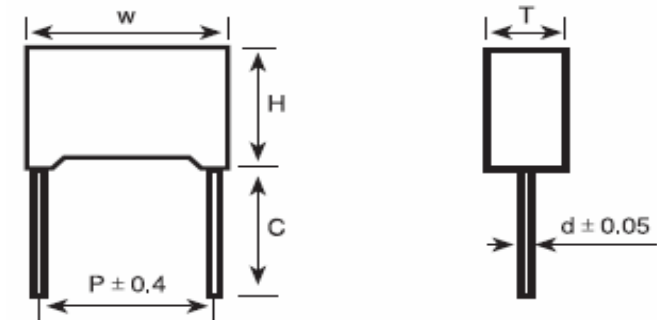

Case Dimension table

Case Code	W ±0,4 (mm)	H ±0,4 (mm)	T ±0,4 (mm)	P (mm)
A	26,5	16,0	7,0	22,5
C ±0,5 (mm)				

Standard Length 18~26mm (Size by Size)

Short Lead 4,5mm

d ±0,05 (mm)

d= 0,8mm

**Double sided metallized
polypropylene film capacitor
Box**

Part No.: **I42006**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	26.05.2011	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 4		

www.edcon-components.com

email: info@edcon-components.com

Copyright by EDCON-COMPONENTS

EDCON-COMPONENTS



Ordering Informations

Serie	Range	Tolerance	Voltage	Case Code	Pitch Code	Lead Style	Lead Length (C)	ROHS	Packing Code	
-------	-------	-----------	---------	-----------	------------	------------	-------------------	------	--------------	--

I42006	-	153	M	202	A	9	N	LL	R	BU
---------------	---	------------	----------	------------	----------	----------	----------	-----------	----------	-----------

153= 0,015µf	M= 20% Standard	202= 2000VDC	A= look Case Dimension	9= 22,5mm	N= No function	LL= Long Lead (Standard)	R= ROHS Conform	BU= Bulk Ware
	K= 10%					45= Lead Length 4,5mm	N= NON ROHS Conform	TB= Tape Box
	J= 5%							IV= Individual Package
	H= 3%							
	G= 2%							

**Double sided metallized
polypropylene film capacitor
Box**

Part No.: **I42006**


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	26.05.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4

Customer:



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

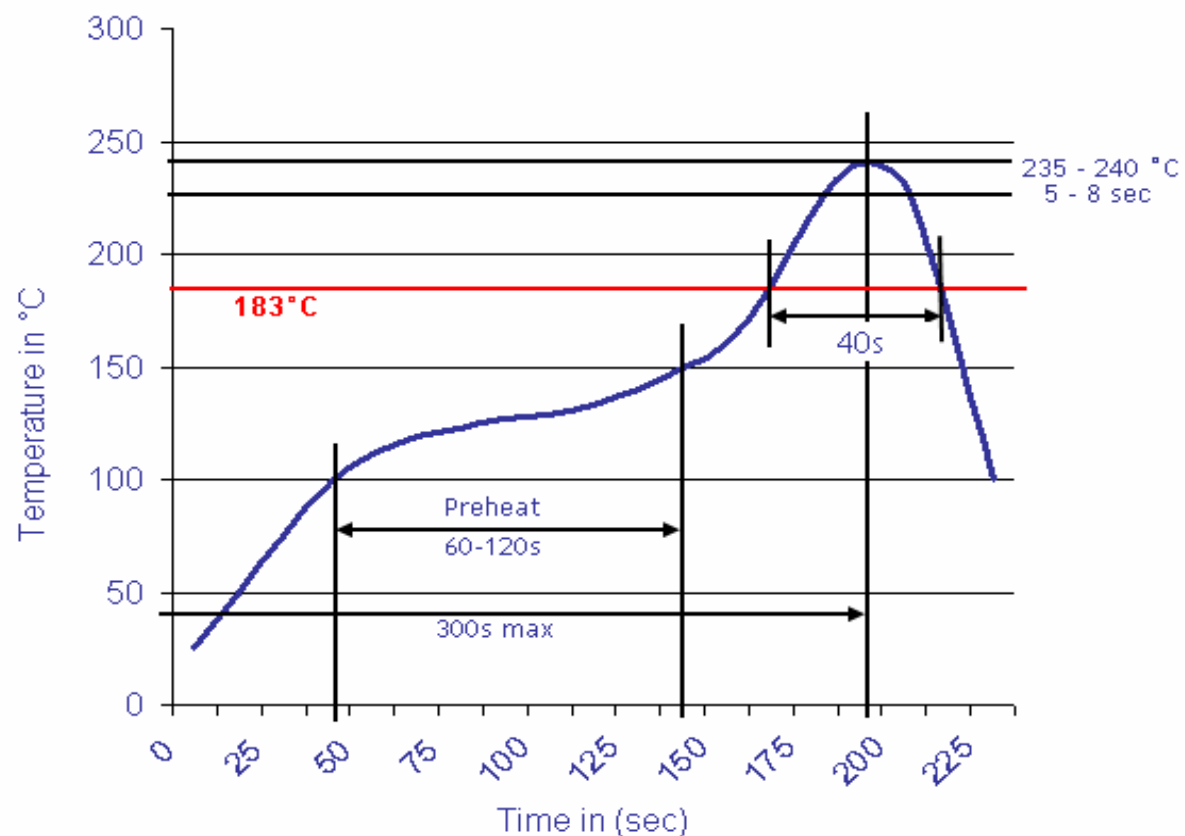

**Double sided metallized
polypropylene film capacitor
Box**

Part No.: **I42006**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	26.05.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	

Customer:

email:info@edcon-components.com