




Specifications

Nominal Voltage		1.2 V
Nominal Capacity		1200 mAh
Minimum Capacity		1150 mAh
Internal Resistance at 1000 Hz		≤ 20 mΩ (after Charge)
Charge	Standard	120 mA x 16 h
	Rapid	600 mA x 2.1 h
	Trickle	36 ~ 60 mA
Discharge Cut-off Voltage		1.0 V
Cycle Life		≥ 500 Cycles
Ambient Temperature	Standard	0°C to 45°C
	Rapid	10°C to 40°C
	Trickle	0°C to 45°C
	Discharge	-20°C to 50°C
	Storage	-20°C to 45°C
Ambient Humidity		65 ± 20%

Technical Drawing

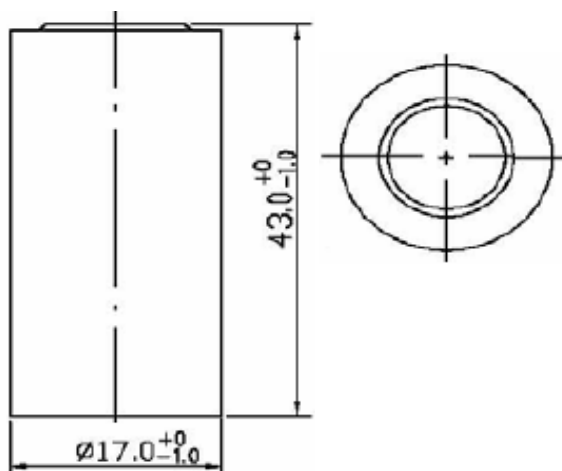

Ordering Information

Serie	-	RoHS	Packing	EDCON Customer No	Part No
-------	---	------	---------	-------------------	---------

B39001	-	R	BL2	XX	XX
---------------	---	----------	------------	-----------	-----------

EDCON-Serie	-	N	BL2 =	XX	XX
-------------	---	----------	--------------	----	----

N = no RoHS conform	BL2 = Blister Pack 2 pcs
R = RoHS conform	BL4 = Blister Pack 4 pcs
	FP2 = Shrink Foil 2 pcs
	FP4 = Shrink Foil 4 pcs
	IP = Industrial Package

NICD Battery




Part No.: **B39001**

Customer:

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	04.12.2009
APPD:	Ping			FINISH	Hui	Sheet	1 from 3



General Characteristics

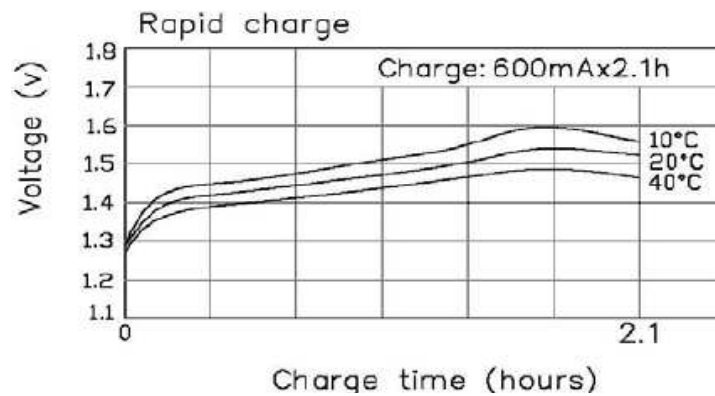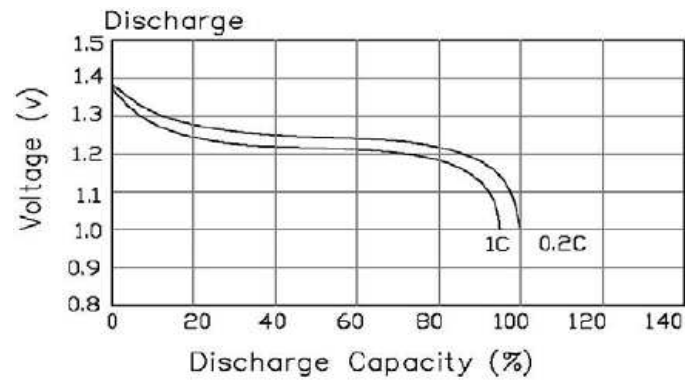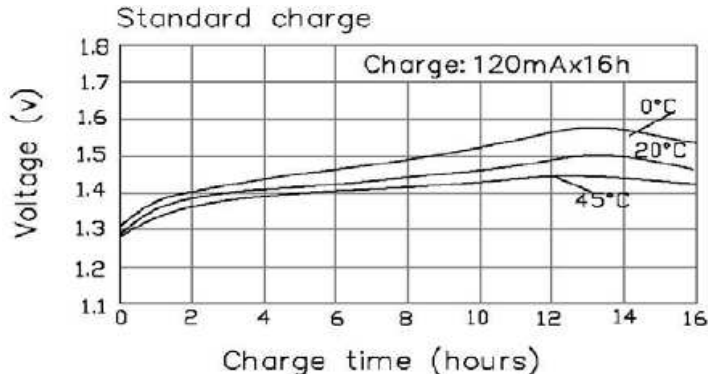

NICD Battery

Part No.: **B39001**

Customer:

DRW:	Dong	CHKD	Chang	MATL:	Chui	DATE	04.12.2009
APPD:	Ping			FINISH	Hui	Sheet	2 from 3