

EDCON-COMPONENTS




SPECIFICATION:

Current Rating:	0,3 Ampere
DC- Voltage	50 VDC
Dielectric Withstanding:	AC 500V
Operating Temperature:	.-40°C to +105°C
Function:	1P2T
Timing:	Non-Shorting / Shorting
Contact Resistance:	30m Ω max.
Insulation Resistance:	100M Ω min at 500VDC
Life Test:	10000 cycles


Material of Switch

Board:	1 Phenolic Resin (Nature)
Contact Clip:	1 PBS Strip (Nature)
Frame:	1 Iron Strip (Ni plated)
Terminal:	3 Brass Strip (Ag Plated)
Knob:	1 POM (Black)


Knop Type

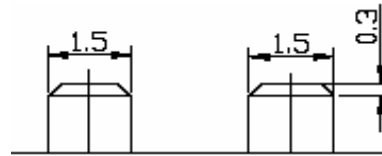


Type A

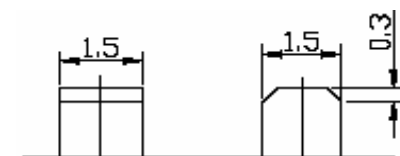

Type B



Circuit

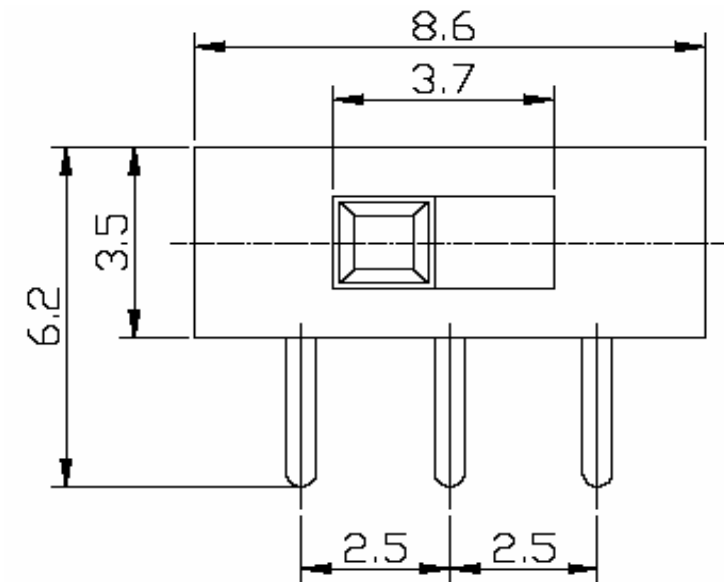

THT Slide-Switch

Part No.: **Q13004**



Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.06.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

EDCON-COMPONENTS



Drawing

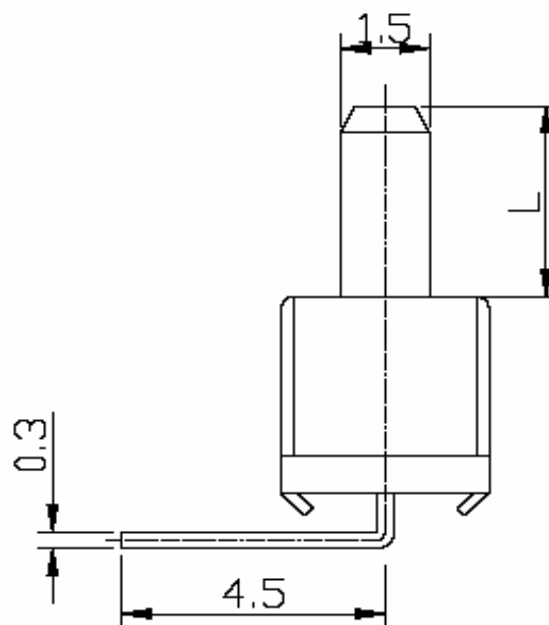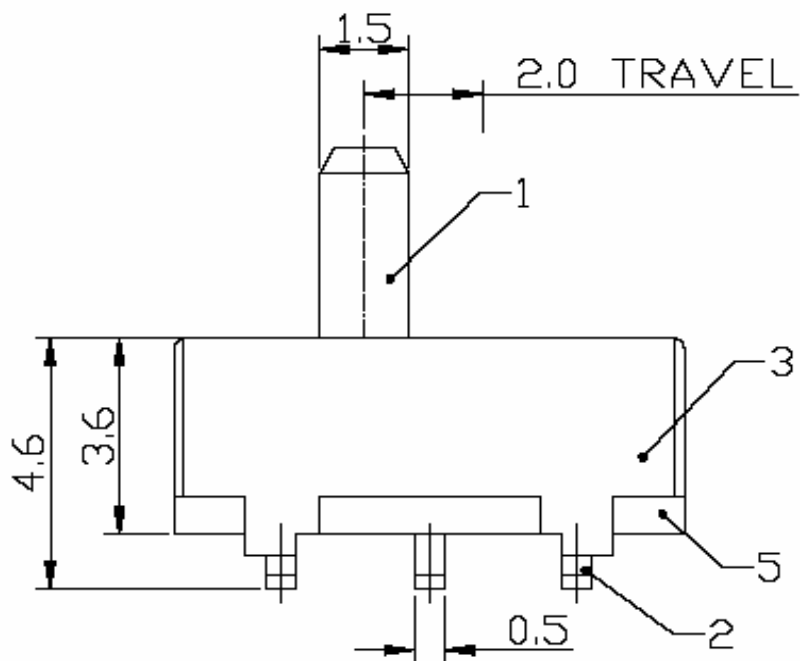

THT Slide-Switch

Part No.: **Q13004**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.06.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 4	

www.edcon-components.com

email: info@edcon-components.com

Copyright by EDCON-COMPONENTS

EDCON-COMPONENTS



Ordering Informations

Serie	Knob Type	Knob Length	Circuit	Special function A	Special function B	ROHS	Packing			
Q13004	A	02	N	N	N	R	BU			

A = Type A	02 = Length L=2,0mm	N = Non Shorting	N = No function	N = No function	R = ROHS Conform	BU = BULK- WARE
B = Type B	L =2 ~ 15mm	S = Shorting			N = NON ROHS Conform	IV = Individual Package

THT Slide-Switch

Part No.: **Q13004**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.06.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4

Customer:
email: info@edcon-components.com

www.edcon-components.com

Copyright by EDCON-COMPONENTS


EDCON-COMPONENTS



EDCON[®]
COMPONENTS
A MEMBER OF EDCON-GROUP

Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

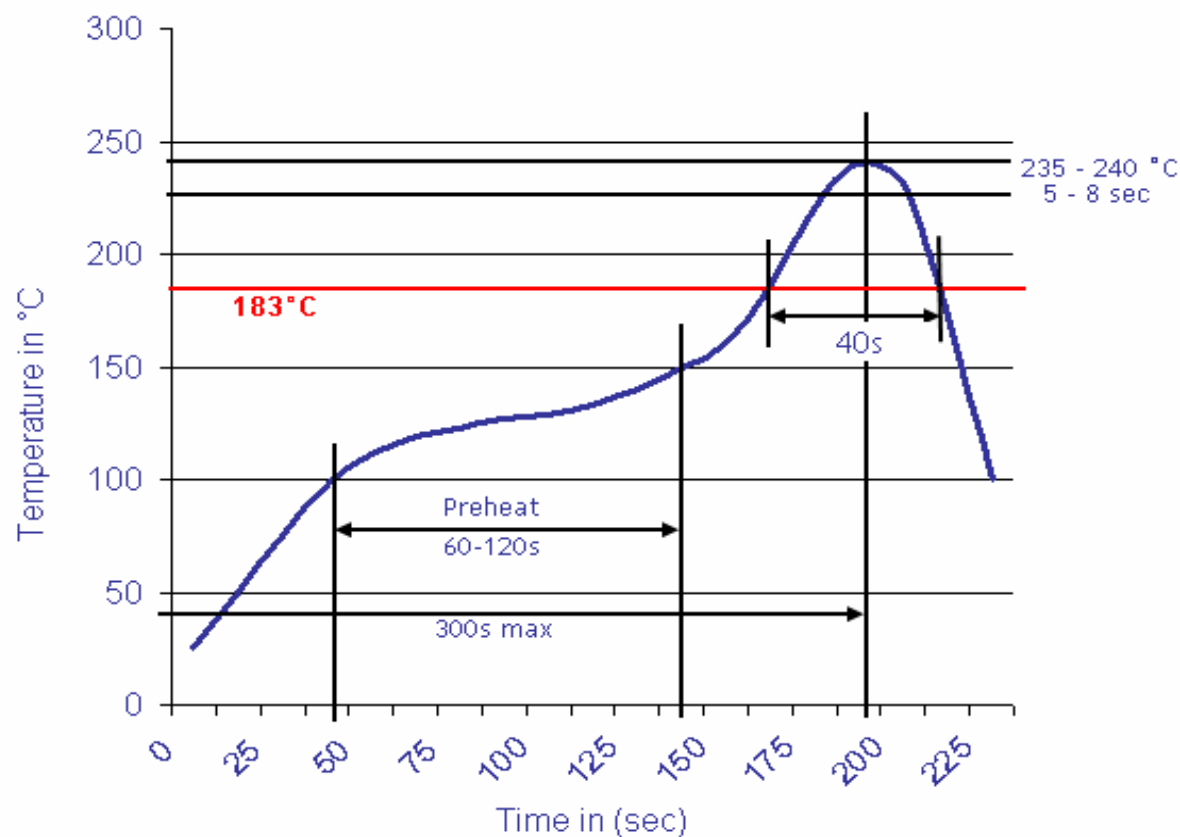

	THT Slide-Switch	
	Part No.:	Q13004
1	Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.06.201
APPD:	Schumi			FINISH	Jamy		Sheet No.		4 from 4