

EDCON-COMPONENTS





SPECIFICATION:

Current Rating:	5,0 / 2,0 Ampere
DC- Voltage	125 / 250 VDC
Dielectric Withstanding:	AC 500V
Operating Temperature:	.-40°C to +105°C
Function:	1P2T
Timing:	Non-Shorting / Shorting
Contact Resistance:	30m Ω max.
Insulation Resistance:	100M Ω min at 500VDC
Life Test:	10000 cycles

Material of Switch


Bar	7 Nylon / Clear
Spring	6 Steel Wire
Case	5 Nylon / Red
Contact Clip	4 Copper Ag plated
Frame	3 SUS
Terminal	2 Copper Ag plated
Knob	1 Nylon Black

PCB Layout

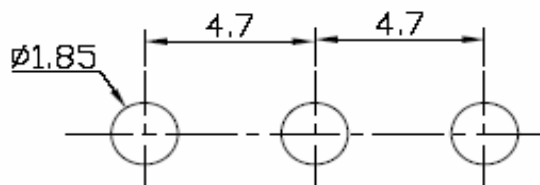


Circuit

Knop Type



Type A

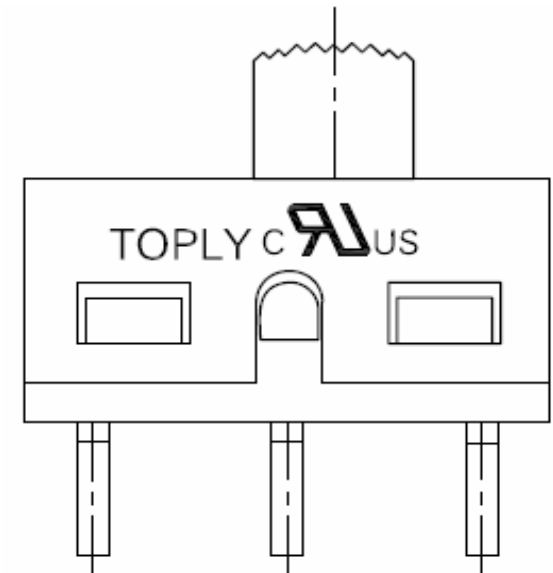

THT Slide-Switch

Part No.: **Q13018**




Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	19.06.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 4

EDCON-COMPONENTS



Drawing

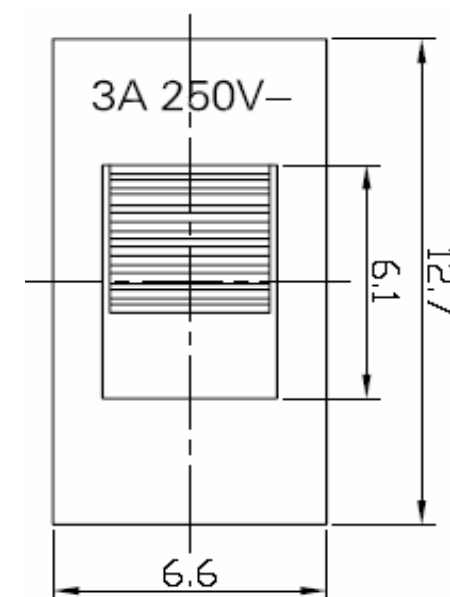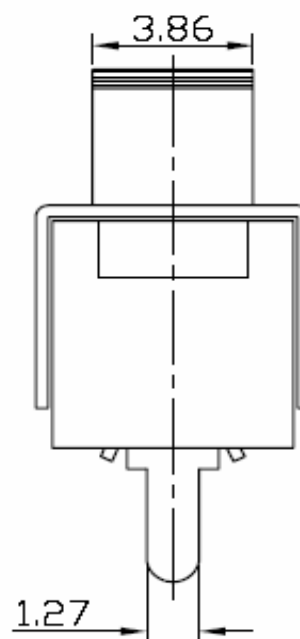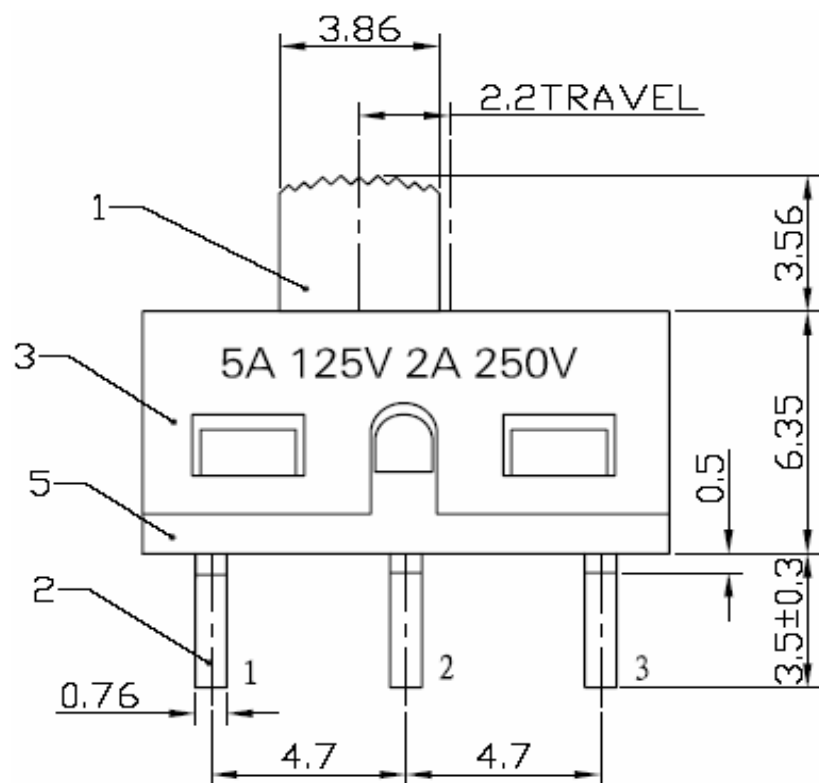

THT Slide-Switch

Part No.: **Q13018**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	19.06.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 4	

www.edcon-components.com

email: info@edcon-components.com

Copyright by EDCON-COMPONENTS

EDCON-COMPONENTS



Ordering Informations

Serie	Knob Type	Knob Length	Circuit	Special function A	Special function B	ROHS	Packing			
Q13018	A	03	N	N	N	R	BU			

A= Type A	03= Length L=3,56m	N= Non Shorting	N= No function	N= No function	R= ROHS Conform	BU= BULK- WARE
		S= Shorting			N= NON ROHS Conform	IV= Individual Package

THT Slide-Switch

Part No.: **Q13018**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	19.06.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4

Customer:

www.edcon-components.com

email: info@edcon-components.com


Copyright by EDCON-COMPONENTS

EDCON-COMPONENTS



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

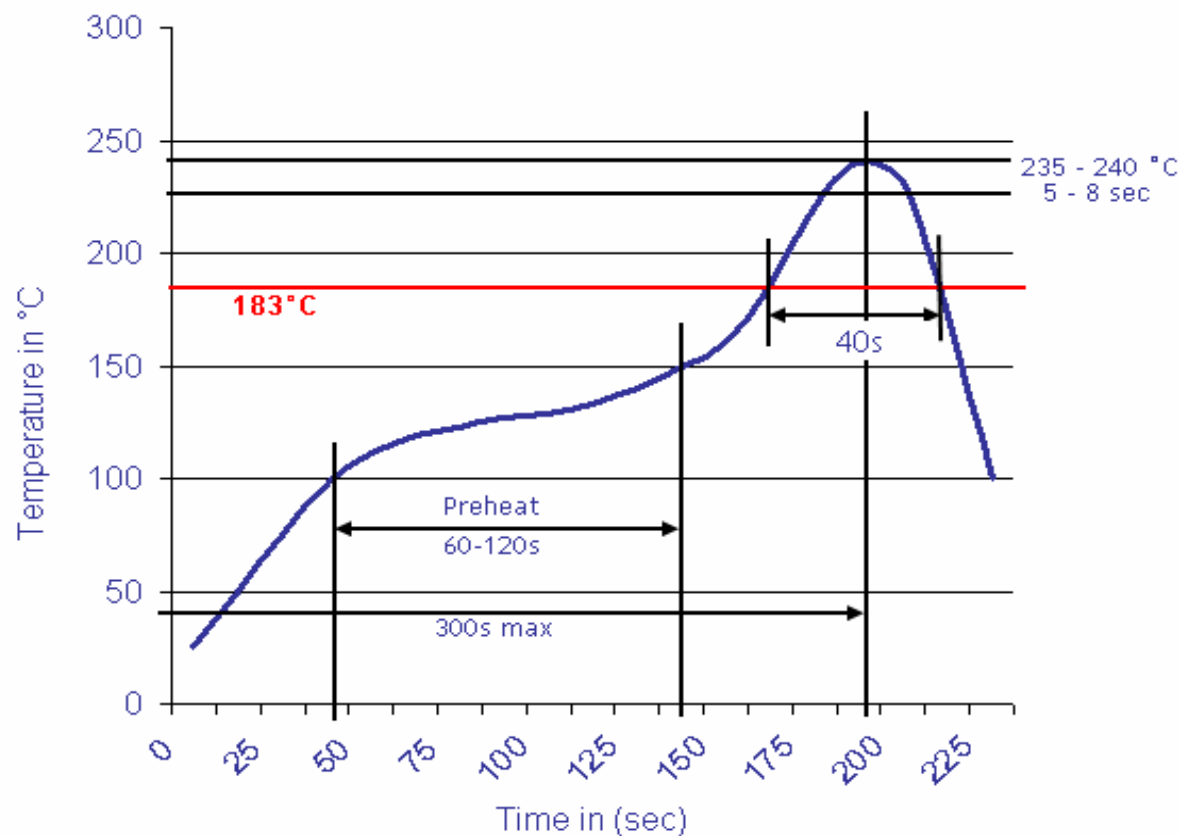

THT Slide-Switch

Part No.: **Q13018**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	19.06.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	