

EDCON-COMPONENTS




Technical Discription

Item		Data
Rating Load		10(4) A 250VAC, 6(2)A/380VAC
Operation speed		5mm-0,5m/s
Operation frequency	Mechanical	240timw/min.
	Electrical	20time/min.
Insualtion Resistance		100MΩ (above) (DC500V)
Contact Resistance		25MΩ Initial value
Withstanding Voltage	Non-connection-wire	1000VAC
	Every terminal	1500VAC
Vibration	Misoperation	10-55Hz (Amplitude) 1,5mm
Impact	Durable	1000m/s
	Misoperation	300m/s
Life	Electrical	50000 (above)
	Mechanical	1200000 (above)
Protection Degree		IP65
Ambient Operating temperature		. -25°C ~ +80°C
Humidity		≤ 85%

Features

Economical Plastic type
Double Way Switch , double spring inner switch
Many kinds levers to move, easily use

Contact Type and Connecting Plan

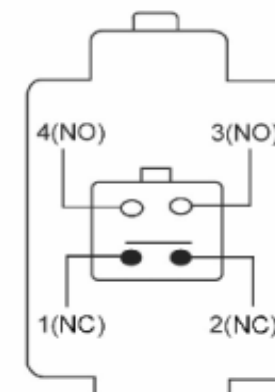

Limit Switch

Part No.: **68002**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.07.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3






www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Sizes

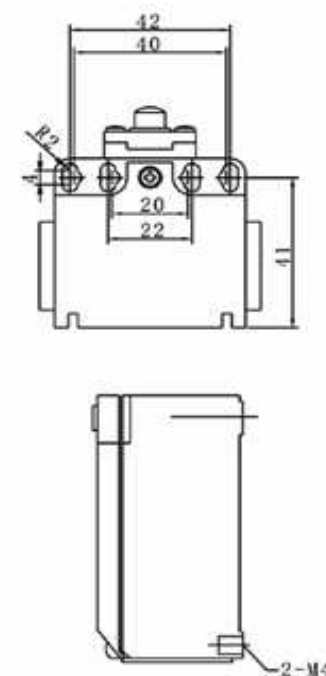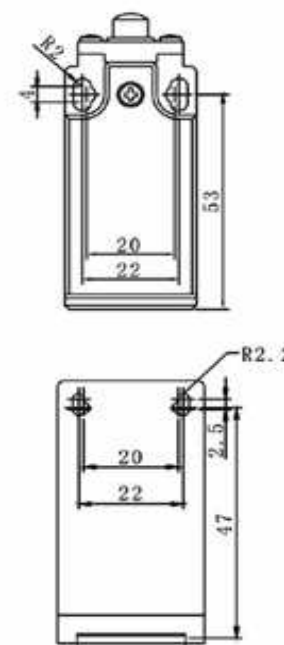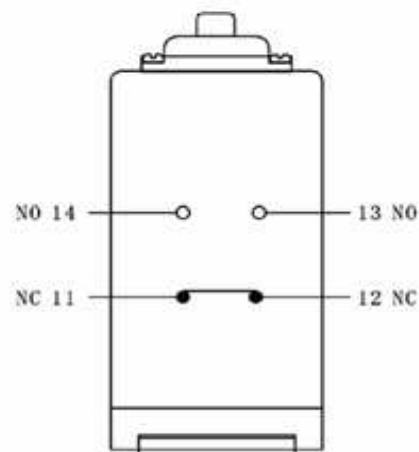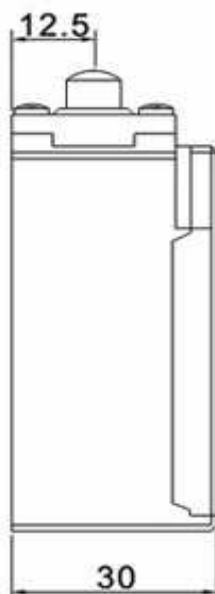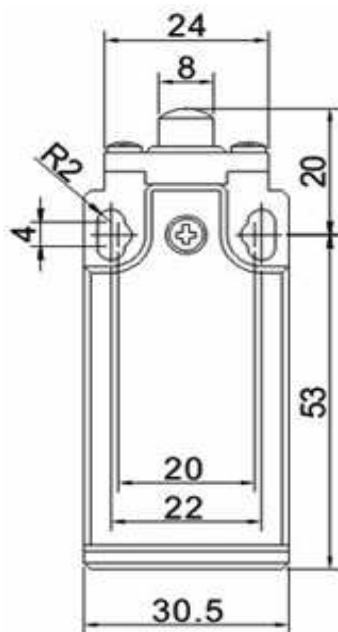

Limit Switch

Part No.: **68002**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.07.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3	

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Type	Plunger Type	ROHS	Packing						
68002	XZ	9101								

Limit Switch

Part No.: **68002**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.07.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	

Customer:
email: info@edcon-components.com

www.edcon-components.com