



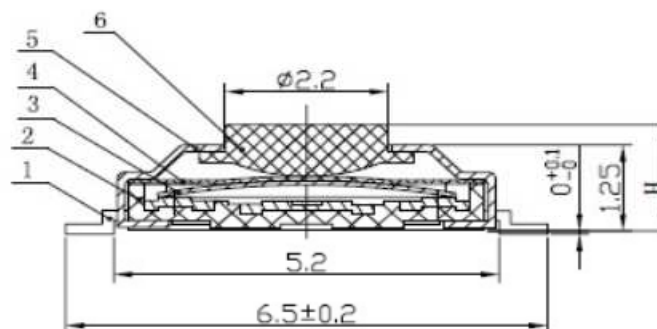

EDCON[®]
COMPONENTS
A MEMBER OF EDCON-GROUP

Voltage Rating:	12VDC
Current Rating:	50mA
Mechanical Life:	100000 cycles
Contact Resistance:	100m Ω max. (initial)
Insulation Resistance:	10M Ω min. 500VDC
Dielectric Strenght:	250VAC/1min.
OperatingTemperature:	.-20°C ~ +70°C

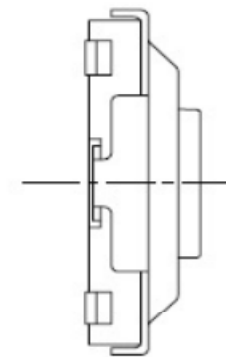

Tolerances unless otherwise specified (mm)				
x	x.x	x.xx	x.xxx	Angle
±	±	±	±	±3°
Wilson	TOLERANCE	Mason	DATE	15.09.2022
Jamy		Sheet No.		1 from 4

Part No.:	Q12176
-----------	--------

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.09.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 4


www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Drawing / Dimensions (mm)

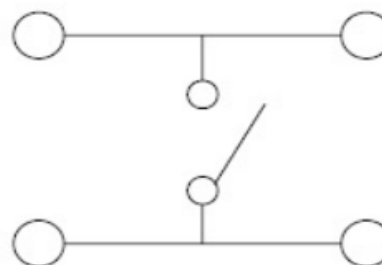

SMT Tact Switch

Part No.: **Q12176**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.09.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 4	

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Total height w. Body	Fill with 0	Operating Force	Polarisation Peg	Electrical life	Cap Option	Cap Colour	Special function	ROHS	Packing
Q12176	015	X	261	N	504	N	N	N	R	TR

015 = 1,5mm	X = no function	261 = 260gr	N = without Peg	104 = 100000 Cycles by 260gr,. Force	N = No Cap	N = No Cap Colour	N = No Function	N = Non ROHS	TR = Tape/Reel Packing
016 = 1,6mm		161 = 160gr		504 = 500000 Cycles by 160gr. Force				R = ROHS conform	TU = Tube Packing
017 = 1,7mm									BU = Bulk Ware
020 = 2,0mm									
025 = 2,5mm									
030 = 3,0mm									
043 = 4,3mm									
050 = 5,0mm									
060 = 6,0mm	040 = 4,0mm								
070 = 7,0mm	023 = 2,3mm								
080 = 8,0mm	035 = 3,5mm								
090 = 9,0mm	019 = 1,9mm								

SMT Tact Switch

Part No.: **Q12176**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.09.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 4	

Customer:

www.edcon-components.com


email: info@edcon-components.com

Copyright by S.Tiede



Soldering Profile Lead Free Curve

Classification Reflow Profile (JEDEC J-STD-020C)

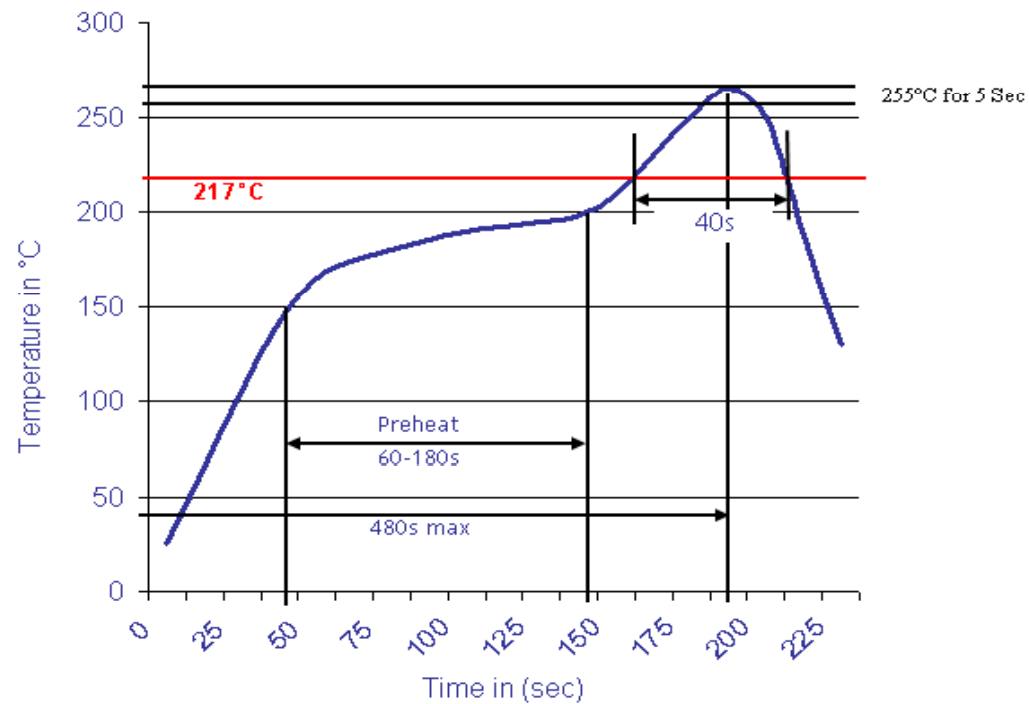**SMT Tact Switch**Part No.: **Q12176**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.09.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	