




EDCON-COMPONENTS



SPECIFICATION:

Current Rating:	0,1A / 30VDC
Insulator Resistance:	100 Megaohm / min. 125VDC
Dielectric Withstanding:	AC 125V / 1 Minute
Operating Temperature:	.-25°C to +65°C
Contact Material:	Copper, Alloy
Insulator Material:	Polyester, UL 94V-0
Standard:	P.B.T.
Contact Plating:	Tin, Gold or Selective Plated
Standard:	Gold Flash Overall
Operating Force:	160gr / +/- 80gr.
Mechanical Lifetime:	100.000cycles
Electrical Lifetime:	10.000cycles
Switch function	Non-Lock / Lock Type

Drawing

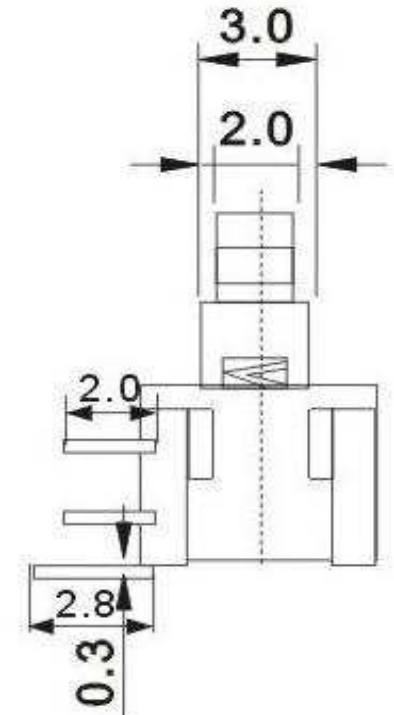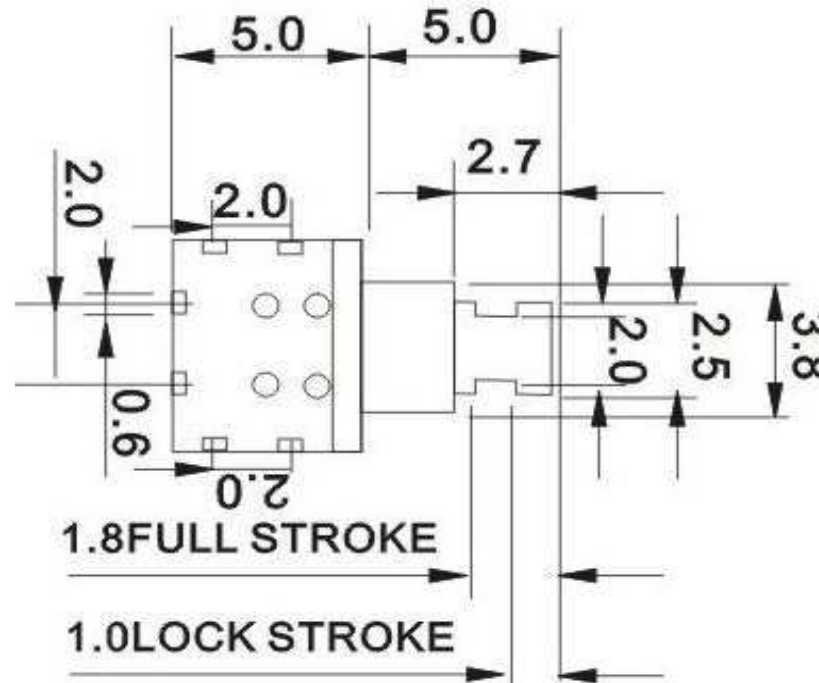

**PCB Pushbutton Switch
5,8x5,8mm R/Atype**

Part No.: **Q23023**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	22.12.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2	

www.edcon-components.com

email: info@edcon-components.com

Copyright by S.Tiede

EDCON-COMPONENTS



Ordering Informations

Serie	Total depth w. Body	Switch function	Operating Force	Special function	Electrical life	Special function	ROHS	Packing		
Q23023	101	N	161	N	104	X	R	BU		

101 = 10mm	L = Look Type	160 = 160gr	X = No Special function		X = No Special function	N = Non ROHS	BU = Bulk Ware
	N = Non Look Type					R = ROHS conform	
				104 = 100000 cycles			

**PCB Pushbutton Switch
5,8x5,8mm R/Atype**

Part No.: **Q23023**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	22.12.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 2	

Customer: