


Technical Information

Vertical Slide Switch
Model:
Rating:
Function:
Timing:
Contact Resistance:
Insulation Resistance:
Dielectric Strength:
Life Test:
Operating Temperature:
Humidity:


Q13280

0,4A 20VDC
2P/2T
NON-Shorting
<40m Ohm max.
>100M Ohm min at 500VDC
AC 500V for 1 Minute
150000 Cycles
-40°C to + 85°C
<85% RH

Technical Dimensions

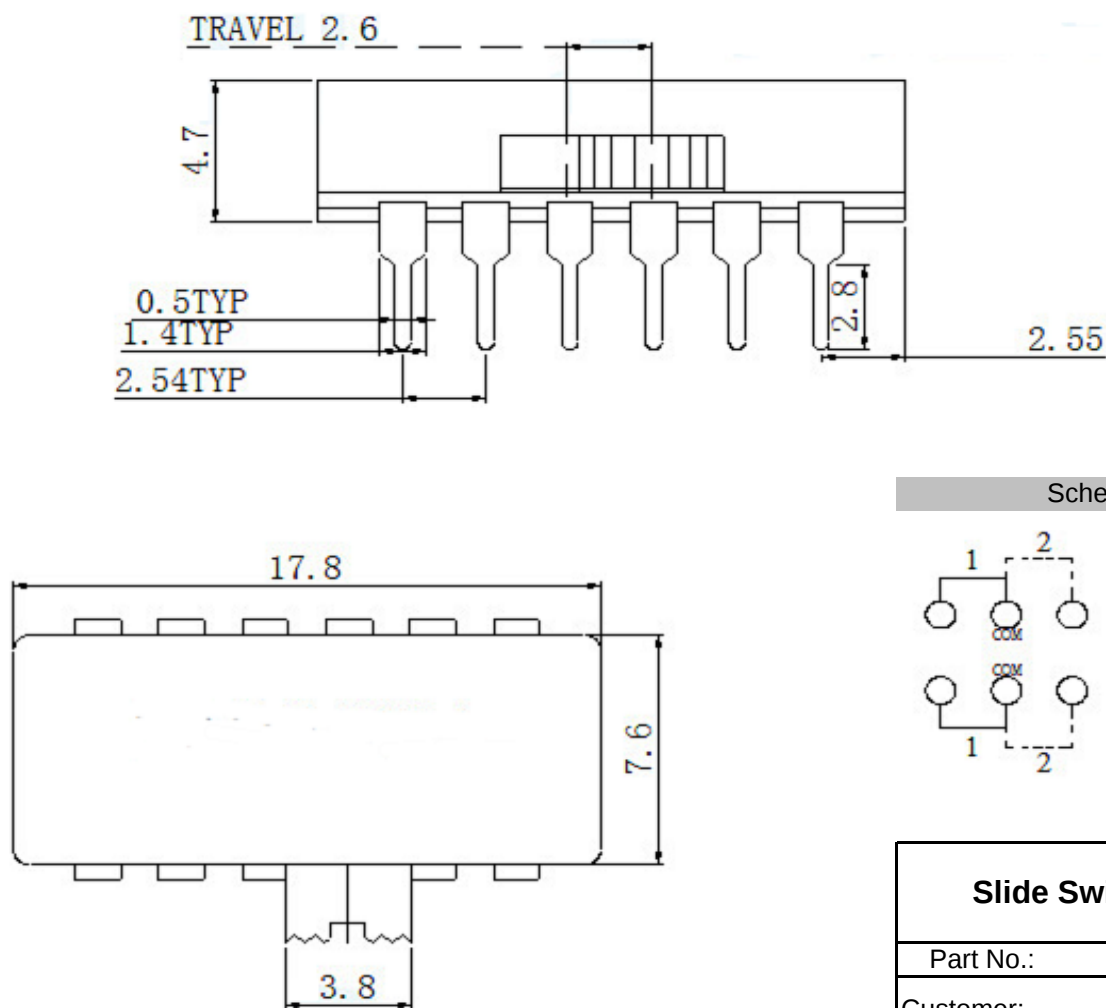

Schematic

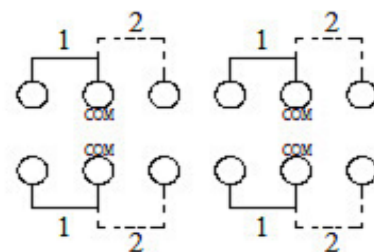


Slide Switch 2P2T

Part No.: **Q13280**



Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	04.03.2017
APPD:	Join			FINISH	Shieh	Sheet	1 from 3



Technical Dimensions

PCB Layout

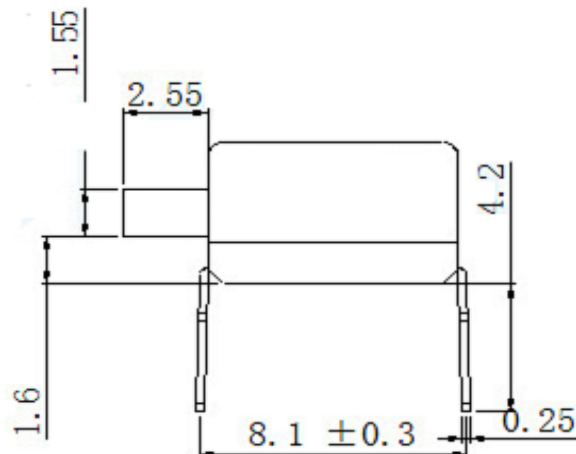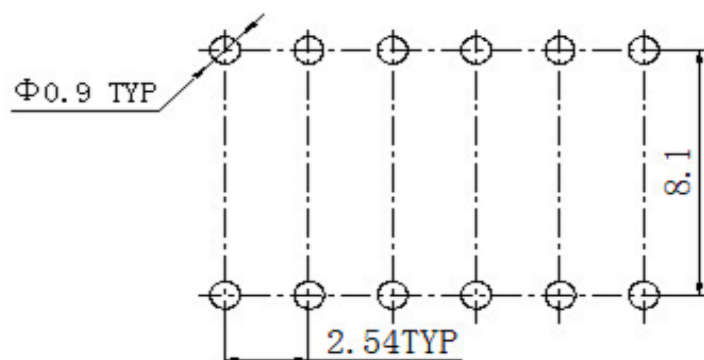


Ordering Information

Serie		Special	Special	ROHS	Packing		
Q13280	-	N	N	R	BU		

N = No special function	N = No special function	R = ROHS Conform	BU = Bulk Ware
		N = NON ROHS	IV = Individual Package


Slide Switch 2P2T	
Part No.:	Q13280
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	04.03.2017
APPD:	Join			FINISH	Shieh	Sheet	2 from 3




LEAD SOLDERING PROFILE

Lead Soldering

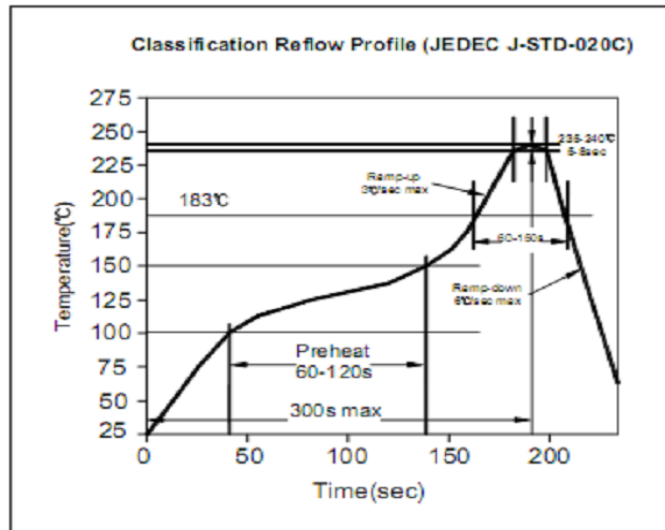

Lead Free Soldering

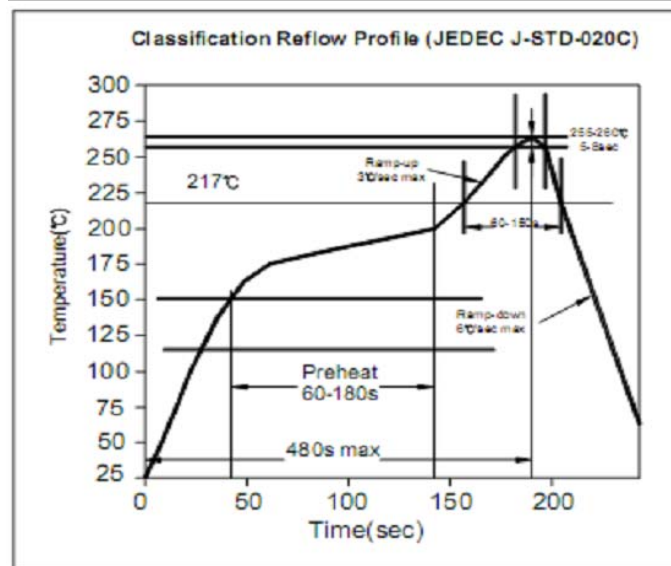

Slide Switch 2P2T

 Part No.: **Q13280**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	04.03.2017
APPD:	Join			FINISH	Shieh	Sheet	3 from 3