



EDCON-COMPONENTS

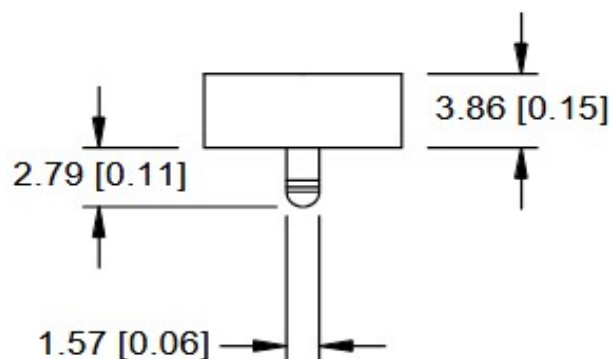

Technical Drawing (mm)


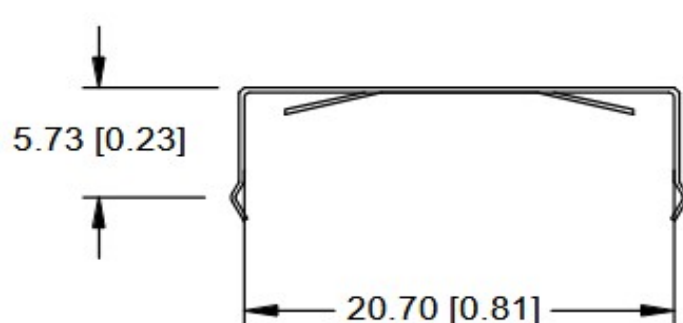


Technical Specification

- * Material- 0.25mm Phosphor Bronze, Nickel plated.
- * Vibration test: 10-50-10 hz swept in 60 seconds
x,y,z direction: 1 hour each direction
- * Result: no dislodgement of the cell or damage
no discontinuity over 10 micro-seconds
- * Shock test: half sine wave acceleration 150g.
6 ms 1 shock pulses each direction per axis
- * Result: no evidence of physical damage
- * Drop Test: Mounted on board and dropped 1 time per direction
from 1m high to wooden floor
- * Result: No dislodgement of the cell, No damage to the holders
- * ROHS COMPLIANT

PCB-(View) Layout (mm)

NEGATIVE CONTACT PAD
NICKEL OR GOLD PLATED
RECOMMENDED

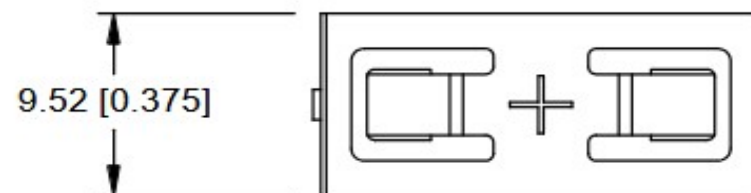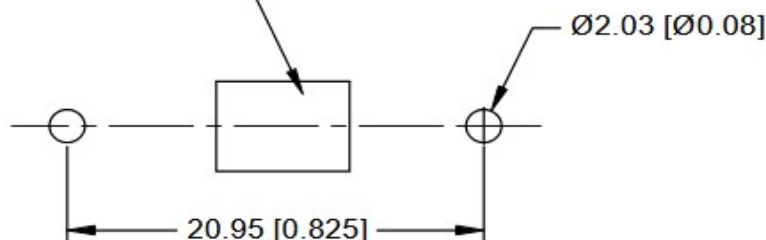

Coin Cell Holder for Battery Ø 20mm

Part No.: **B23195**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	08.11.2025
APPD:	Schumi			FINISH	Jamy		Sheet No. CCR-2031	1 from 3	

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Contact Plating	Spezial Function	Spezial Function	Spezial Function	ROHS	Packing				
B23195	NI	0	0	0	R	BU				

NI = Nickel-Plated	0 = No function	0 = No function	0 = No function	R = ROHS Conform	BU = Bulk-Ware
MN = Matte Tin-Plated					TR = Tape Reel

**Coin Cell Holder for
Battery Ø 20mm**

Part No.: **B23195**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	08.11.2025
APPD:	Schumi			FINISH	Jamy				2 from 3

Customer:


www.edcon-components.com

email: info@edcon-components.com



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

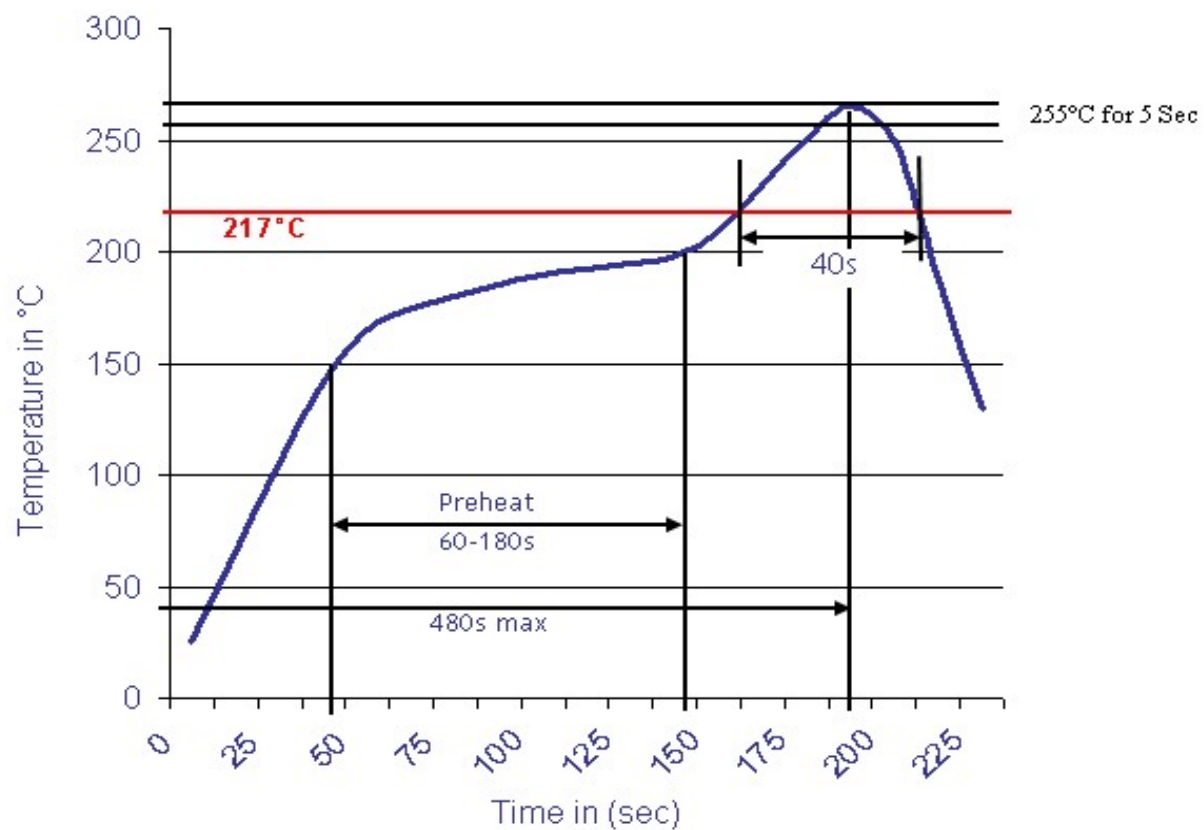
**Coin Cell Holder for
Battery Ø 20mm**

 Part No.: **B23195**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	08.11.2025
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	