



**FFC / FPC Flat Cable Pitch 0,8mm**


<b>Conductor</b>	Material	Tinned Coper, Bare Copper
	Size Ct x Cw	0,035x0,3 / 0,035x0,5 / 0,035x0,7 / 0,076x1,57 0,1x0,3 / 0,1x0,4 / 0,1x0,5 / 0,1x0,7 / 0,1x1,27

<b>Insulation</b>	Material	Flame Retardant Polyester
	Size (Thickness)	0,037mm / 0,043mm / 0,06mm / 0,092mm
	Color	White + Black

<b>Supporting Tape</b>	Material	Flame Retarant Polyester
	Size (Thickness)	0,16mm / 0,223mm
	Color	White + Blue

Item Quantity	Unit	Standard	Order Code
Pitch (P)	MM	0,8 ±0,03	
No. Of Conductor	CORE	4 ~120	<b>004 ~ 120</b>
Total Pitch (TP)	MM	0,5 (N-1) ±0,06	
Cable Width (W)	MM	0,5 (N-1) ±0,08	
Margin (M)	MM	0,5 / ±0,1	
End Thickness (T)	MM	0,3 / ±0,05	
Supporting Tape (B)	MM	4 ~ 7 ±1 / 8 ~ 20 ±2	<b>04 ~ 20</b>
Total Length (L)	MM	10 ~ 220 ±2 / 201 ~ 600 ±5 / >600 ±10	<b>010 ~ 990</b>

Film     
  Conductor     
  B Supporting Tape

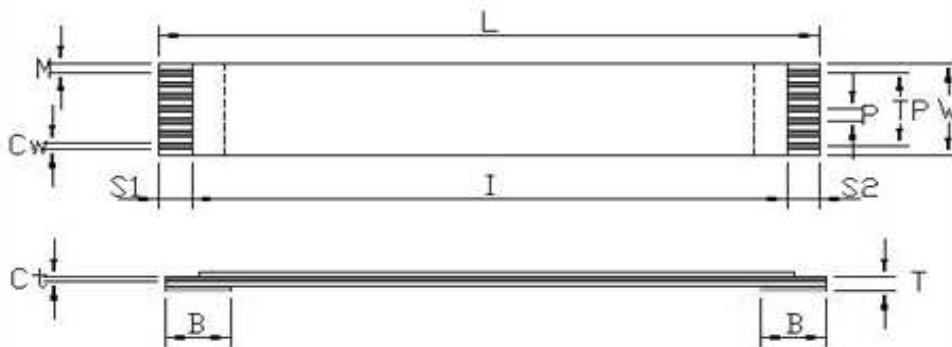

<b>FFC/FPC Flat Cable Pitch 0,80mm</b>	
Part No.:	<b>T29007</b>
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	28.09.2015
APPD:	Join			FINISH	Shieh	Sheet	1 from 3

Copyright by S.Tiede



**Construction Type**

<p><b><u>A-TYPE</u></b>          Without supporting tape</p>	
<p><b><u>B-TYPE</u></b>          One end supporting tape only</p>	
<p><b><u>C-TYPE</u></b>          Supporting Tape on same side</p>	
<p><b><u>D-TYPE</u></b>          Supporting Tape on opposite side</p>	
<p><b><u>E-TYPE</u></b>          Half lift-up supporting tape</p>	
<p><b><u>F-TYPE</u></b>          Semi-stripping</p>	
<p><b><u>G-TYPE</u></b>          AIR-BAG CABLE</p>	

<b>FFC/FPC Flat Cable Pitch</b>	
<b>0,80mm</b>	
Part No.:	<b>T29007</b>
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	28.09.2015
APPD:	Join			FINISH	Shieh	Sheet	2 from 3



**Ordering Code**

Conductor Thickness Order Code Table 1			Insulation Thickness Order Code Table 2	
Code	Conductor Size ct+cw	Ampere	Code	Thickness Size
A	0,035x0,3	0,15A	1	0,037mm
B	0,035x0,5	0,2A	2	0,043mm
C	0,035x0,7	0,3	3	0,06mm
D	0,076x1,57	0,8	4	0,092mm
E	0,1x0,3	0,5		
F	0,1x0,4	0,8		
G	0,1x0,5	0,8		
H	0,1x0,7	1,0		
J	0,1x1,27	2,0		

**Ordering Information**

Serie	No of Conductor	Construction Type	Cable Total Length (mm)	Supporting Tape S1=(mm)	Supporting Tape S2=(mm)	Color of Cable	Conductor Table 1
T29007	xxx	A	xxx	xx	xx	W	A

006 ~ 170 Pos.	A= Type A B= Type B C= Type C D= Type D E= Type E F= Type F G= Type G	010= 10 ~ 990mm	04= 4 ~ 20mm	04= 4 ~ 20mm	W= White B= Black	A= A ~ J
----------------	---	-----------------	--------------	--------------	----------------------	----------

Insulation Table 2	ROHS	Packing
--------------------	------	---------

1	R	BU
---	---	----

1= 1 ~ 4	R= Rohs conform N= NON ROHS conform	BU= Polybag IV= Individual Package
----------	--	---------------------------------------

FFC/FPC Flat Cable Pitch 0,80mm	
Part No.:	T29007
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	28.09.2015
APPD:	Join			FINISH	Shieh	Sheet	3 from 3