

## EDCON-COMPONENTS



### Technical Discription

Aluminium enclosures can use in wide range temperature territory

Aluminium enclosures are highly tolerant to chemicals

Aluminium enclosures can protect against or internal radiated noise (EMS) Electro magnetic shield)

Aluminium enclosures which are resistant to corrosion and sea water, are suited to hazarous, circumstances, such as indoor outdoor, in shore area etc.

Material: Al Si 12, DIN 1725

Protection Degree: Standard: IP66, EN 60529  
Flange: IP65, EN 60529

Impact Strength: > 7Nm, EN 50014

.-40°C to +100°C PUR (polyuretahne)  
seal, solid foam

Gasket .-40°C to +100°C CR (chloropene) seal,

Temperature Range solid foam (round seal)


.-60°C to +130°C VMQ (silicone) seal,  
solid foam (round seal)

Coating: powder-coating

Color: Gray / (RAL7001) order hue possibility

Dimension (mm)

| W1  | W2  | W3  | H1  | H2  | H3  | D1  | D2 |
|-----|-----|-----|-----|-----|-----|-----|----|
| 230 | 220 | 180 | 330 | 320 | 310 | 161 | 20 |

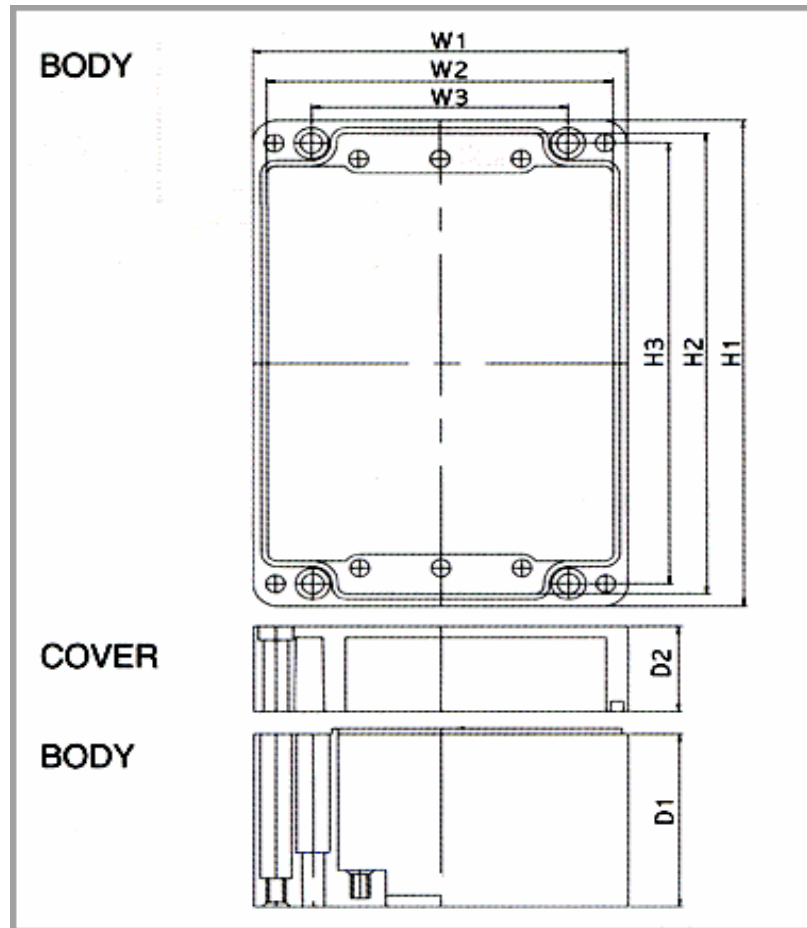

**Aluminium Enclosures  
230x330x180mm**

Part No.: **H15030**

Customer:

|       |        |      |        |        |        |           |           |      |            |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW:  | Jason  | CHKD | Wilson | MATL:  | Wilson | TOLERANCE | Mason     | DATE | 12.02.2010 |
| APPD: | Schumi |      |        | FINISH | Jamy   |           | Sheet No. |      | 1 from 2   |

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)

# EDCON-COMPONENTS



[Assesories for Serie H150xx](#)

## Ordering Informations

| Serie | Material Base | Color Base | ROHS | Packing |  |  |  |  |  |  |
|-------|---------------|------------|------|---------|--|--|--|--|--|--|
|-------|---------------|------------|------|---------|--|--|--|--|--|--|

|               |          |          |          |          |  |  |  |  |  |  |
|---------------|----------|----------|----------|----------|--|--|--|--|--|--|
| <b>H15030</b> | <b>A</b> | <b>G</b> | <b>R</b> | <b>S</b> |  |  |  |  |  |  |
|---------------|----------|----------|----------|----------|--|--|--|--|--|--|

|                        |                |                                  |                                 |
|------------------------|----------------|----------------------------------|---------------------------------|
| <b>A=</b><br>Aluminium | <b>G=</b> Gray | <b>R=</b> ROHS<br>Conform        | <b>S=</b> Standard<br>Packing   |
|                        |                | <b>N=</b> NON<br>ROHS<br>Conform | <b>I=</b> Individual<br>Packing |

**Aluminium Enclosures  
230x330x180mm**

Part No.: **H15030**

|       |        |      |        |        |        |           |           |          |            |
|-------|--------|------|--------|--------|--------|-----------|-----------|----------|------------|
| DRW:  | Jason  | CHKD | Wilson | MATL:  | Wilson | TOLERANCE | Mason     | DATE     | 12.02.2010 |
| APPD: | Schumi |      |        | FINISH | Jamy   |           | Sheet No. | 2 from 2 |            |

Customer:

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)