

Data Sheet

Screwless Terminal Block

Pitch: 2,50 mm

Serie: A11E006

Customer Information for special Item

EDCON Customer : 0

Customer Version No. : 0

EDCON-COMPONENTS



Technical Discription

Drawing (Dimension in mm)

Electrical

Standard	cUL	VDE
Rated voltage	150V	130V
Rated current	4A	6A
Wire range	28-20 AWG	0.2-0.5mm ²

Mechanical


Operating temperature	-40°C ~ +105°C
-----------------------	----------------

Dimensions

Pitch	2.50mm
Poles	2P - 24P

Material

Housing	Polyamide66 (UL94V-0)
Pin header	Brass, Tin plated
Wire guard	Stainless strip steel

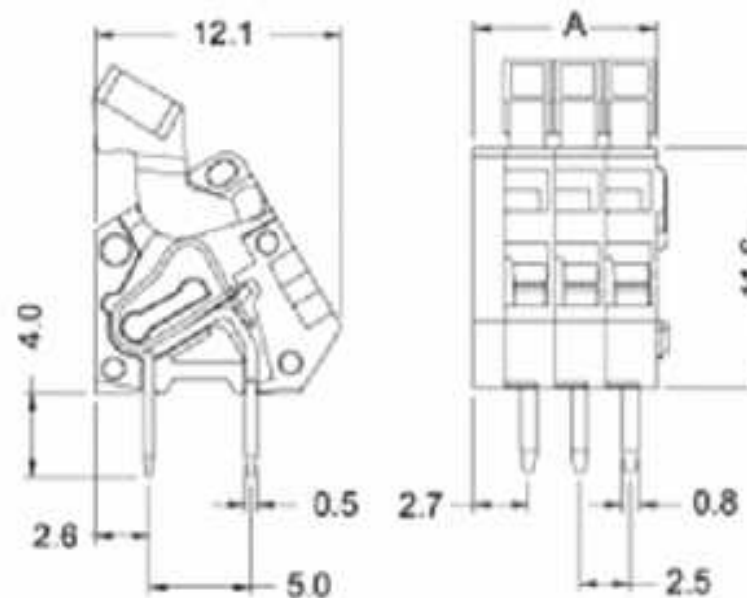

Screwless Terminal Block

Part No.: **A11E006**

Customer:


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	27.01.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

EDCON-COMPONENTS



PCB Layout (Dimension in mm)

Dimensions (mm)

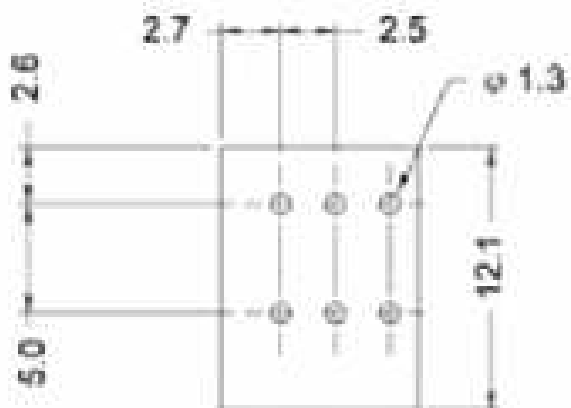

No. of Pos.	A	Tol. P	B	Tol. P
02	6,85	± 0,35	2,50	± 0,35
03	9,35	± 0,35	5,00	± 0,35
04	11,85	± 0,35	7,50	± 0,35
05	14,35	± 0,35	10,00	± 0,35
06	16,85	± 0,35	12,50	± 0,35
07	19,35	± 0,35	15,00	± 0,35
08	21,85	± 0,35	17,50	± 0,35
09	24,35	± 0,35	20,00	± 0,35
10	26,85	± 0,35	22,50	± 0,35
11	29,35	± 0,35	25,00	± 0,35
12	31,85	± 0,35	27,50	± 0,35
13	34,35	± 0,35	30,00	± 0,35
14	36,85	± 0,35	32,50	± 0,35
15	39,35	± 0,35	35,00	± 0,35
16	41,85	± 0,35	37,50	± 0,35
17	44,35	± 0,35	40,00	± 0,35
18	46,85	± 0,35	42,50	± 0,35
19	49,35	± 0,35	45,00	± 0,35
20	51,85	± 0,35	47,50	± 0,35
21	54,35	± 0,35	50,00	± 0,35
22	56,85	± 0,35	52,50	± 0,35
23	59,35	± 0,35	55,00	± 0,35
24	61,85	± 0,35	57,50	± 0,35

Screwless Terminal Block

Part No.: **A11E006**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	27.01.2014	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 4		

EDCON-COMPONENTS



Ordering Informations

Serie	No. of Pos.	Body Color	Approval	Approval Code	ROHS	Packing	EDCON Cust. No.	Customer Version		
-------	-------------	------------	----------	---------------	------	---------	-----------------	------------------	--	--

A11E006	02	GY	N	N	R	B				
----------------	-----------	-----------	----------	----------	----------	----------	--	--	--	--

Pitch 2,50	02= Number of Pos. Standard 2 ~ 24Pos.	GY= Gray (Standard) GN= Green OR= Orange BK= Black	N= No Approval 1= Approval for Material 2= Approval for Terminal Block	N= NON Approval A= UL /UR Approval Please consult EDCON for available B= VDE Approval Please consult EDCON for available C= TÜV Approval Please consult EDCON for available	R= ROHS Conform N= NON ROHS Conform	B= Standard Package I= Individual Package	xxxxxx= Customer Number	xxx= Customer Version ??(Printing)
---------------	---	---	--	--	--	--	-------------------------	------------------------------------

Screwless Terminal Block

Part No.: **A11E006**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	27.01.2014
APPD:	Schumi			FINISH	Jamy			Sheet No.	3 from 4

Customer:



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)



Screwless Terminal Block

Part No.: **A11E006**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	27.01.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	