



EDCON-COMPONENTS



Drawing

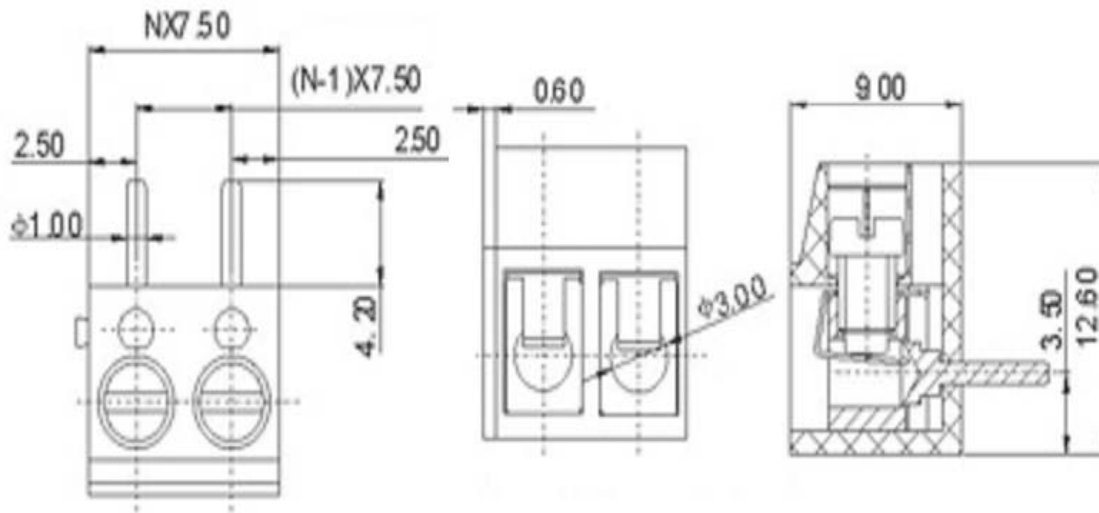

P.C.B. Layout

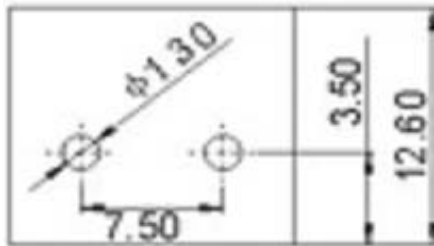

Specification

APPROVAL		UL	VDE
Electrical			
Standard	UL	IEC	
Rated voltage	300V	250V	
Rated current	10A	24A	
Wire range	22-14 AWG	2.5mm ²	
Withstanding voltage	AC2000V/1Min		
Mechanical			
Ambient temperature	-30°C ~ +120°C		
Strip length	5 ~ 6mm		
Screw, Torque	M3, 0.5Nm (4.4Lb-In.)		
Dimensions			
Pitch	7.50mm		
Poles	2P, 3P-24P		
Material			
Housing	PBT (UL94V-0)		
Pin header	Brass, Tin plated		
Screw	steel, Cr ³⁺ Zn plated		
Wire guard	Stainless steel		



Certification



Wire Protector Terminal Block /
Pitch 7.50mm

Part No.: A12Q003

Customer:

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	14.3.2009
APPD:	Louis			FINISH	Georg			Sheet No.	1 from 3

www.edcon-components.com

email: info@edcon-components.com


EDCON-COMPONENTS



Ordering Informations

Serie	-	No. of Pole	Body-Color	wire protector	Screw	-	Customer Request
A12Q003	-	XX	XX	X	X	-	X

XX = total	WH - white	1 - with wire protector	A - Slotted screw (standard)
	GN - green	2 - without wire protector	B - Cross-slotted screw
	GR - gray		
	BL - blue		
	PG - Phoenix Green		
	OR - orange		
	LG - light gray		
	BK - black		

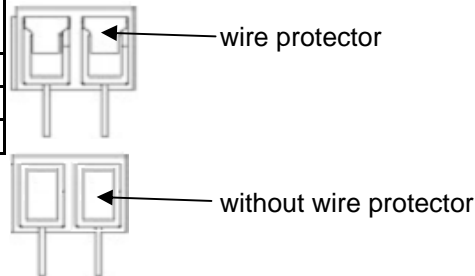

Certification



Wire Protector Terminal Block /
Pitch 7.50mm

Part No.: A12Q003

Customer:

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	14.3.2009
APPD:	Louis			FINISH	Georg		Sheet No.		2 from 3


www.edcon-components.com

email: info@edcon-components.com



Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

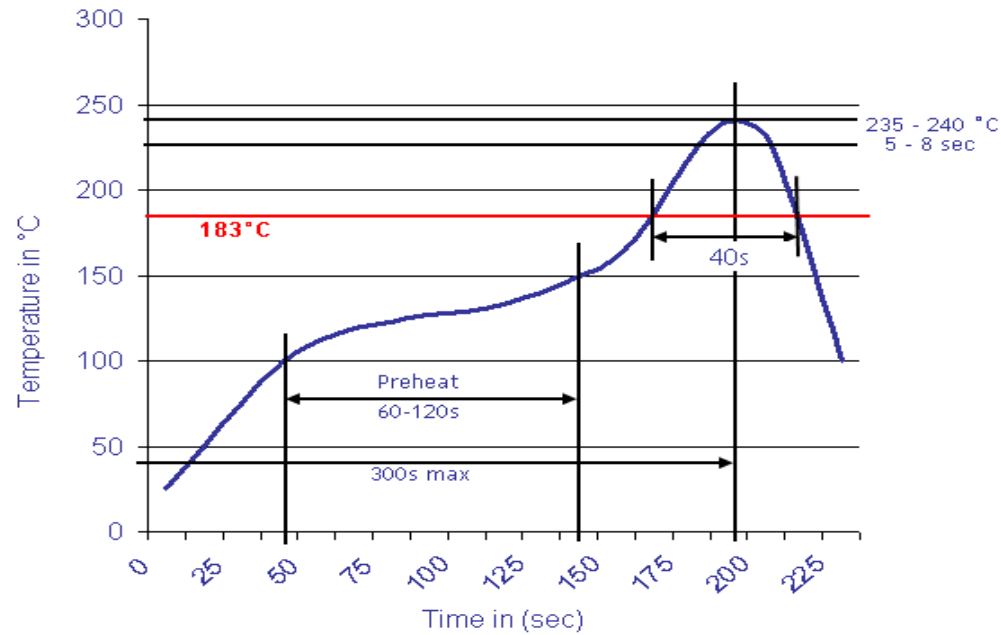

Wire Protector Terminal Block /
Pitch 7.50mm

Part No.: A12Q003

Customer:

DRW:	Bill	CHKD	Lord	MATL:	Jimmy	TOLERANCE	Sam	DATE	14.3.2009
APPD:	Louis			FINISH	Georg			Sheet No.	3 from 3