




Applications

- Interior automotive lighting(dashboard backlight etc...)
- Optical indicators
- High Tech Lightning
- Security Parts
- Automotive Products

Technical Dimensions

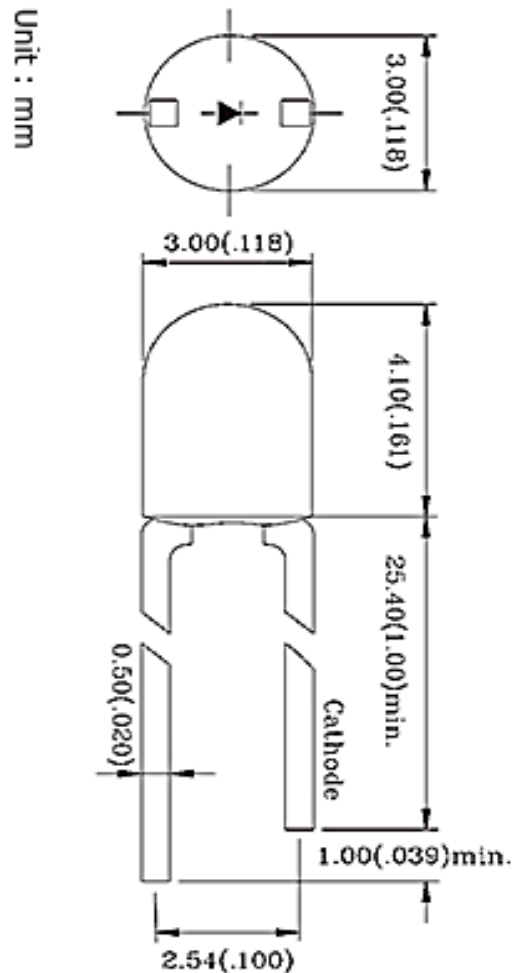

Notes:

All dimensions in mm tolerance is ± 0.1 mm unless otherwise noted.

3mm LED Type= Flangeless

Part No.: **M13G7005**

Customer:

DRW:	Harry	CHKD	Dustin	MATL	Wilson	TOLERANCE	Mason	Date:27.01.2020
APPD:	Jason			FINISH	John		Sheet No.	1 from 5

www.edcon-components.com

email: info@edcon-components.com

© by S.Tiede



Absolute Maximum Ratings (Ta = 25°C)

Item-Discription	Symbol	Value	Unit
DC Forward Current	If	30	mA
Pulse Forward Current	I _{fp}	100	mA
Reverse Voltage	V _r	5	V
Power Dissipation	R _d	120	mW
Operating Temperature	T _{opr}	-.30 ~ +85	°C
Storage Temperature	T _{stg}	-.40 ~ +100	°C
Lead Soldering Temp.	T _{sol}	260°C/ 5sec.	--

Typical Electrical & Optical Characteristics (IF=20mA and Ta = 25°C)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
DC Forward Voltage	V _f	IF=20mA	3,0		3,2	V
Domi. Wavelength	D	IF=20mA	460		465	nm
Wavelength (Kelvin)						K
Luminious Intensity	I _v	IF=20mA	1000		1200	mcd
50% Power Angle	20 1/2	IF=20mA				deg
DC Forward Current:				20		mA
Viewing Angle:				30		°
Lens Colour	Diffus					

Ordering Informations

Part-No	Lead Length	Special function	Special Function	ROHS	Packing	
M13G7005	-	A1	N	N	R	BU

A1= 19mm	N= No Special	N= No Special function	R= ROHS Conform	BU= Bulk-Ware
A2= 25,4mm			N= NON ROHS	TR= Tape/Reel
A4= Cutted 4mm				

3mm LED Type= Flangeless


Notes:

1. Tolerance of measurement of luminous intensity	: ±15%	Part No.:	M13G7005
2. Tolerance of measurement of chromatic coordinates	: ±1nm	Customer:	
3. Tolerance of measurement of forward voltage	: ±0.1V		
DRW: Harry CHKD Dustin MATL Wilson	TOLERANCE	Mason	Date:27.01.2020
APPD: Jason	FINISH John	Sheet No.	2 from 5




Soldering condition

Lead solder

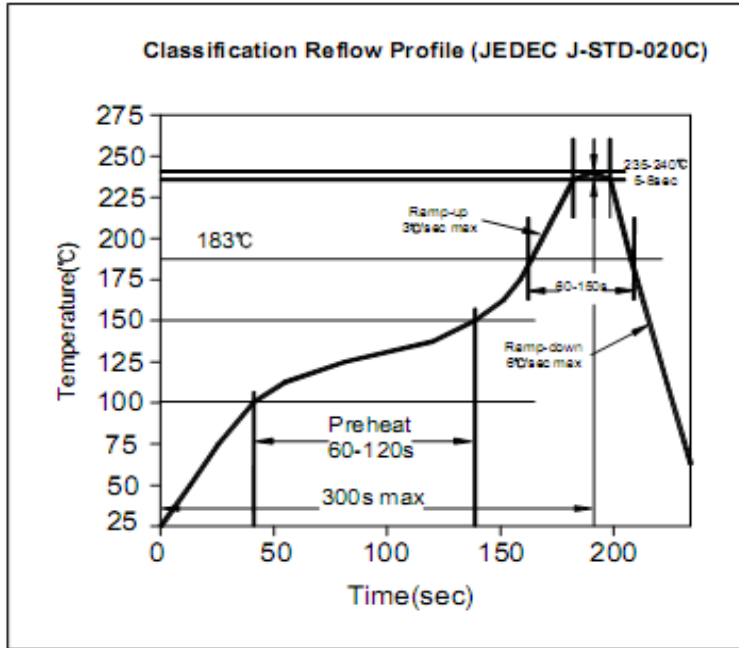

Lead free solder

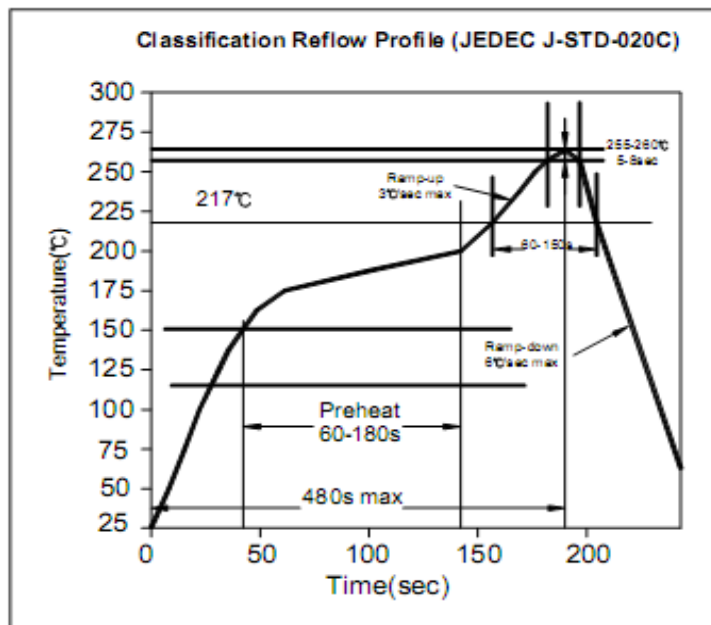

3mm LED Type= Flangeless

Part No.: **M13G7005**

Customer:

DRW:	Harry	CHKD	Dustin	MATL	Wilson	TOLERANCE	Mason	Date:27.01.2020
APPD:	Jason			FINISH	John		Sheet No.	3 from 5



Packing Specification

Antistatic Polybag




3mm LED Type= Flangeless
Part No.: M13G7005
Customer:

DRW:	Harry	CHKD	Dustin	MATL	Wilson	TOLERANCE	Mason	Date:27.01.2020
APPD:	Jason			FINISH	John		Sheet No.	4 from 5



Color table curve

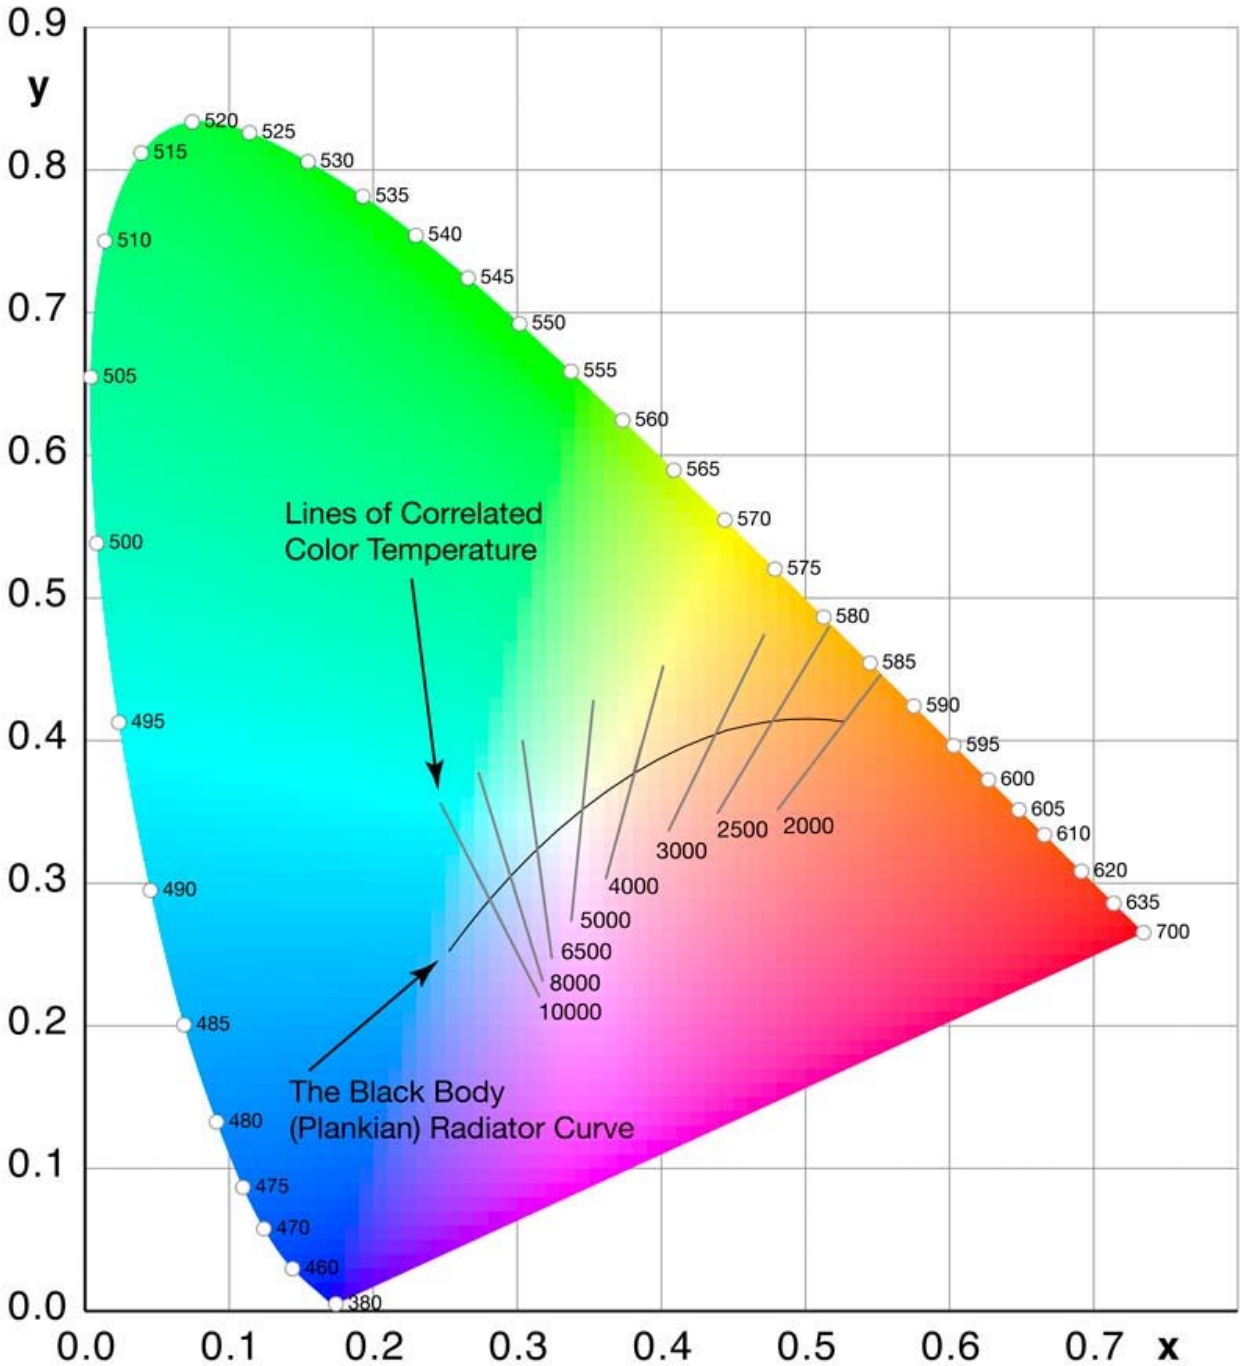

3mm LED Type= Flangeless	
Part No.:	M13G7005
Customer:	

DRW:	Harry	CHKD	Dustin	MATL	Wilson	TOLERANCE	Mason	Date:27.01.2020
APPD:	Jason			FINISH	John		Sheet No.	5 from 5

