


EDCON-COMPONENTS




Specifications

Insulation Material:	Polyvinyl Chloride (PVC)
Conductor:	#28 AWG (7*0,127) Stranded Tinned Copper #26 AWG (7*0,16) Stranded Tinned Copper
UL-Style:	2651
Colour of Isolation:	Colored
Operating Temperature:	.-20°C to +105°C
Flammability Rating:	UL-VW-1
Voltage Rating:	300V
Electrical:	
Impedance	120Ω (Unbalanced)
Capacitance:	11,2pf/feet
Inductance:	14μH/Feet
Insulation Resistance:	1GΩ / M min.
Colour Range:	Brown, Red,Orange,Yellow,Green,Blue,Violet,Grey,White,Black, 10 Colour Repeat

Dimensions (mm)


Pos.	A	B	Pos.	A	B
3	8,72	7,62	25	64,60	63,50
4	11,26	10,16	26	67,14	66,04
5	13,80	12,70	27	69,68	68,58
6	16,34	15,24	28	72,22	71,12
7	18,88	17,78	29	74,76	73,66
8	21,42	20,32	30	77,30	76,20
9	23,96	22,86	31	79,84	78,74
10	26,50	25,40	32	82,38	81,28
11	29,04	27,94	33	84,92	83,82
12	31,58	30,48	34	87,46	86,36
13	34,12	33,02	35	90,00	88,90
14	36,66	35,56	36	92,54	91,44
15	39,20	38,10			
16	41,74	40,64			
17	44,28	43,18			
18	46,82	45,72			
19	49,36	48,26			
20	51,90	50,80			
21	54,44	53,34			
22	56,98	55,88			
23	59,52	58,42			
24	62,06	60,96			

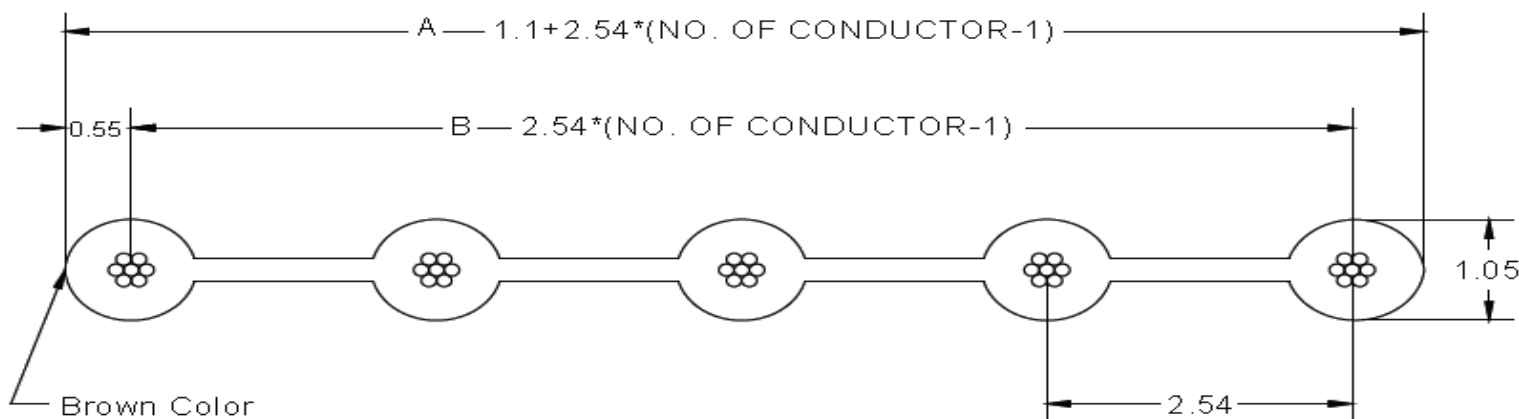

Rainbow Flat Ribbon Cable	
Pitch 2,54	
Part No.:	T29037
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	13.12.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

EDCON-COMPONENTS



Ordering Informations

Serie	Nmber of Position	Colour of Cable	AWG Size	Special function	Special function	ROHS	Packing
T29037	xx	RA	28	00	00	R	Rxx

xx= Like Table	RA= Rainbow Colored	28= wire Size AWG28	00= No function	00= No function	R= ROHS Conform	Rxx= Length of cable per Reel
		26= wire Size AWG26			N= NON ROHS Conform	

Rainbow Flat Ribbon Cable Pitch 2,54	
Part No.:	T29037
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	13.12.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2