


EDCON-COMPONENTS




Specifications

Insulation Material:	Polyvinyl Chloride (PVC)
Conductor:	#28 AWG (7*0,127) Stranded Tinned Copper #26 AWG (7*0,16) Stranded Tinned Copper
UL-Style:	2651
Colour of Isolation:	Colored
Operating Temperature:	.-20°C to +105°C
Flammability Rating:	UL-VW-1
Voltage Rating:	300V
Electrical:	
Impedance	120Ω (Unbalanced)
Capacitance:	11,2pf/feet
Inductance:	14μH/Feet
Insulation Resistance:	1GΩ / M min.
Colour Range:	Brown, Red,Orange,Yellow,Green,Blue,Violet,Grey,White,Black, 10 Colour Repeat

Dimensions (mm)


Pos.	A	B	Pos.	A	B
3	8,60	7,50	25	63,60	62,50
4	11,10	10,00	26	66,10	65,00
5	13,60	12,50	27	68,60	67,50
6	16,10	15,00	28	71,10	70,00
7	18,60	17,50	29	73,60	72,50
8	21,10	20,00	30	76,10	75,00
9	23,60	22,50	31	78,60	77,50
10	26,10	25,00	32	81,10	80,00
11	28,60	27,50	33	83,60	82,50
12	31,10	30,00	34	86,10	85,00
13	33,60	32,50	35	88,60	87,50
14	36,10	35,00	36	91,10	90,00
15	38,60	37,50			
16	41,10	40,00			
17	43,60	42,50			
18	46,10	45,00			
19	48,60	47,50			
20	51,10	50,00			
21	53,60	52,50			
22	56,10	55,00			
23	58,60	57,50			
24	61,10	60,00			

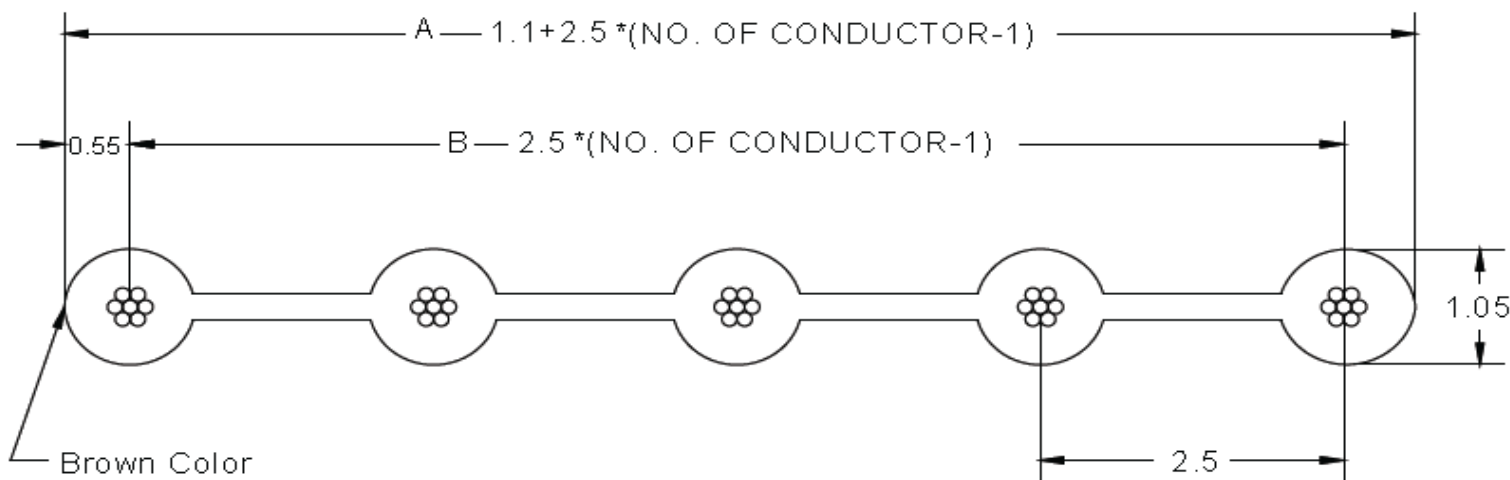

Rainbow Flat Ribbon Cable	
Pitch 2,50	
Part No.:	T29038
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	13.12.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

EDCON-COMPONENTS



Ordering Informations

Serie	Nmber of Position	Colour of Cable	AWG Size	Special function	Special function	ROHS	Packing
T29038	xx	RA	28	00	00	R	Rxx

xx= Like Table	RA= Rainbow Colored	28= wire Size AWG28	00= No function	00= No function	R= ROHS Conform	Rxx= Length of cable per Reel
		26= wire Size AWG26			N= NON ROHS Conform	

Rainbow Flat Ribbon Cable Pitch 2,50	
Part No.:	T29038
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	13.12.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2