

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

I14059 (SHX)


Ultra Low Impedance Long Life Series

- Enabled high ripple current by a reduction of impedance at high frequency
- High reliability withstanding 10000 hours load life at 105°C
(6000/8000 hours for as specified below)
- Complied to the RoHS directive

Items	Performance characteristics																	
Operating temperature range	-40 ~ +105°C																	
Leakage current max.	I=0.01CV or 3μA whichever is greater (after 2 minutes) I=0.03CV or 4μA whichever is greater (after 1 minute)																	
Capacitance tolerance	±20% at 120Hz, 20°C																	
Dissipation factor max. (at 120Hz, 20°C)	Capacitance > 1000μF: tanδ increases by 0.02 for each 1000μF from below value.																	
	<table border="1"> <tr> <td>WV</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <td>Tanδ</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.09</td> <td>0.08</td> </tr> </table>	WV	6.3	10	16	25	35	50	63	100	Tanδ	0.22	0.19	0.16	0.14	0.12	0.10	0.09
WV	6.3	10	16	25	35	50	63	100										
Tanδ	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08										
Low temperature characteristics (Impedance ratio at 120Hz)	Z-40°C / Z+20°C																	
	Z-25°C / Z+20°C																	
Load life (after application of the rated voltage for 10000 hours at 105°C)	Leakage current	Less than specified value																
	Capacitance change	Within ±25% of initial value																
	Tanδ	Less than 200% of specified value																
	Φ5, Φ6.3 : 6000 hours; Φ8 : 8000 hours; ≥Φ10: 10000 hours.																	
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value.																	

● DRAWING

Unit : mm

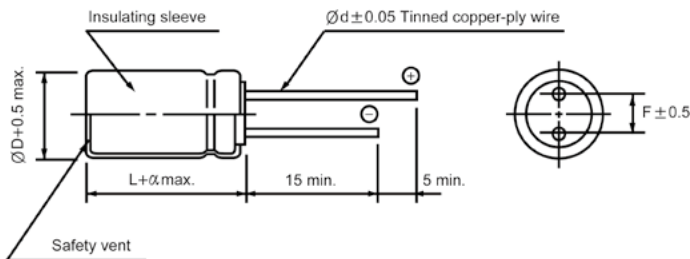

ΦD	5	6.3	8	10	12.5	16	18
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
Φd	0.5		0.6		0.8		
α	1.5			2.0			

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

μF \ Frequency	120Hz	1kHz	10kHz	50kHz	100kHz≤
~ 33	0.42	0.70	0.90	0.95	1.00
39 ~ 270	0.50	0.73	0.92	0.96	1.00
330 ~ 680	0.55	0.77	0.94	0.97	1.00
820 ~ 1800	0.60	0.80	0.96	0.98	1.00
2200 ~	0.70	0.85	0.98	0.99	1.00

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

I14059 (SHX) Series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV μF	6.3			10			16			25		
	10							5×11	0.45	250	5×11	0.65
22	5×11	0.35	250	5×11	0.35	250	5×11	0.45	250	5×11	0.50	250
33	5×11	0.35	250	5×11	0.35	250	5×11	0.45	250	5×11	0.45	250
47	5×11	0.30	250	5×11	0.30	250	5×11	0.45	250	5×11	0.40	250
100	5×11	0.30	250	5×11	0.30	250	6.3×11	0.25	405	6.3×11	0.20	405
150	6.3×11	0.15	405	6.3×11	0.15	405	6.3×11	0.20	405	8×11.5	0.14	760
220	6.3×11	0.15	405	6.3×11	0.15	405	8×11.5	0.15	760	8×11.5	0.12	760
330	6.3×11	0.15	405	8×11.5	0.13	760	8×11.5	0.10	760	10×12.5	0.055	1030
390	6.3×11	0.15	405	8×11.5	0.11	760	8×11.5	0.10	760	8×16	0.072	1250
470	8×11.5	0.11	630	8×11.5	0.11	760	10×12.5	0.053	1030	10×12.5	0.055	1330
560	8×11.5	0.11	760	10×12.5	0.053	900	10×12.5	0.053	1100	8×20	0.072	1800
680	10×12.5	0.053	1030	10×12.5	0.053	1030	10×16	0.038	1430	10×16	0.040	1760
1000	10×12.5	0.053	1030	10×12.5	0.053	1330	10×16	0.038	1760	10×20	0.033	1960
1500	10×20	0.027	1820	10×20	0.030	1820	10×20	0.030	1960	12.5×20	0.029	2550
2200	12.5×20	0.025	2360	12.5×20	0.027	2360	12.5×25	0.023	2770	16×20	0.022	3250
3300	12.5×20	0.025	2360	12.5×20	0.027	2480	16×20	0.020	3250	16×25	0.018	3630
4700	16×25	0.015	3460	16×20	0.022	3250	16×25	0.018	3630			
6800	16×25	0.015	3460	16×25	0.018	3630						
10000	16×31.5	0.015	3680	18×31.5	0.015	3700						

WV μF	35			50			63			100		
	10	5×11	0.55	250	5×11	0.60	250	5×11	1.00	165	6.3×11	0.80
22	5×11	0.50	250	5×11	0.45	250	6.3×11	0.53	265	8×11.5	0.45	355
33	5×11	0.45	250	6.3×11	0.25	405	6.3×11	0.45	265	10×12.5	0.25	450
47	6.3×11	0.30	405	6.3×11	0.20	405	8×11.5	0.20	500	10×12.5	0.20	580
56	6.3×11	0.20	405	6.3×11	0.20	405	8×11.5	0.17	540	10×16	0.20	630
68	8×11.5	0.10	540	8×11.5	0.15	540	10×12.5	0.15	760	10×16	0.20	700
100	8×11.5	0.10	760	8×11.5	0.12	760	10×12.5	0.16	825	10×20 12.5×16	0.18 0.11	800 975
150	8×11.5	0.10	760	10×12.5	0.061	1030	8×20 10×20	0.120 0.080	1200 1200	12.5×20	0.090	1195
220	10×12.5	0.053	1030	10×16	0.038	1430	10×25	0.070	1300	16×25	0.060	1600
330	10×12.5	0.053	1330	10×20	0.032	1820	12.5×20	0.050	1495	16×25	0.040	1750
470	8×20 10×16	0.038 0.041	1600 1760	12.5×20	0.030	2360	12.5×25	0.040	1990	18×31.5	0.035	2060
680	12.5×20	0.026	2360	12.5×25	0.022	2770	16×25	0.030	2780			
1000	12.5×20	0.026	2480	16×25	0.018	3460	16×35.5	0.020	2835			
1500	16×20	0.022	3250	16×31.5	0.015	3680						
2200	16×25	0.018	3630				18×40	0.020	3500			

Case size ΦD×L(mm)
 Ripple current (mA rms) at 105°C , 100kHz
 Impedance (Ω) max. at 20°C , 100kHz