



THT, Radial E-Cap., Snap-In, Long Life, Load Life at 5000 hrs at 85°C , ROHS Conform, Packing Box

Items		Performance Characteristics							
Operating temperature range	-40°C +85°C (160~250V, -25°C ~ +85°C (350~450V)								
Leakage current max.	I=3 √cv (µA) (after 5 minutes)								
Capacitance tolerance	±20% at 120Hz, 20°C								
Dissipation factor max. (at 120Hz, 20°C)	WV	160	200	250	350	400	450		
	TanQ	0,15	0,15	0,15	0,15	0,15	0,20		
Load life (after application of the rated voltage for 5000hrs at 85°C)	Leakage Current				Less than specified Value				
	Capacitance Change				Within ±20% off initial Value				
	TanQ				Less than 200% of specified value				
Shelf life (at 85°C)	After 1000 hours no load test, leakage current, capacitance and tanQ are same as load life value.								



FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

WV	Frequency	50HZ	120Hz	300Hz	1kHz	10kHz≤
160 ~ 250		0,85	1,00	1,20	1,25	1,45
350 ~		0,85	1,00	1,15	1,20	1,40


Technical Details

Range (µF)	390	∅D(mm)	30,0
Voltage	200	L(mm)	20,0
Impedance (Ω)	-.-	F(mm)	10,0
Ripple Current (mA)	1,71	∅d(mm)	0
ESR (Ω) max.at 20°C 10KHz	-.-	α(mm)	0
Lifetime (hrs)	5000	-.-	2,0
Operating- Temperature Range (°C)	-40°C ~ +85°C	-.-	-.-


∅D ≤ 40

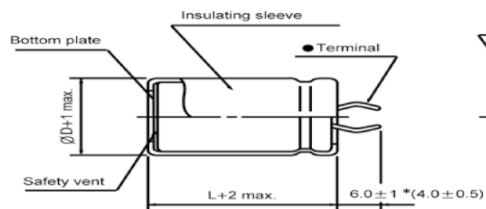

PC Board Mounting Holes





Terminal




* Shorter terminal(4.0±0.5) is also available upon request.
 Terminal length of height 20mm products is applied shorter terminal to standard terminal type.

∅D = 35, 40

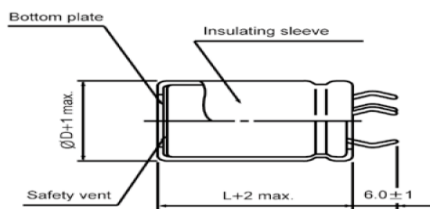

PC Board Mounting Holes



DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	03.02.2025
APPD:	Jimmy			FINISH	Josy	Sheet	1 from 2

Copyright by S.Tiede



THT, Radial E-Cap., Snap-In, Long Life, Load Life at 5000 hrs at 85°C , ROHS Conform, Packing Box

Ordering Informations:


Serie-No. / Voltage / Range / Size	Capacity Tolerance	ROHS	Packing
------------------------------------	--------------------	------	---------

I14081-2013913020	M	R	BU
-------------------	---	---	----


Serie	Voltage (V)	Range μ H)	D * L (mm)	Tolerance Order Code	R= ROHS N= NON ROHS	BU= Bulk-Ware (Box)

Soldering Information

Lead Solder Performance

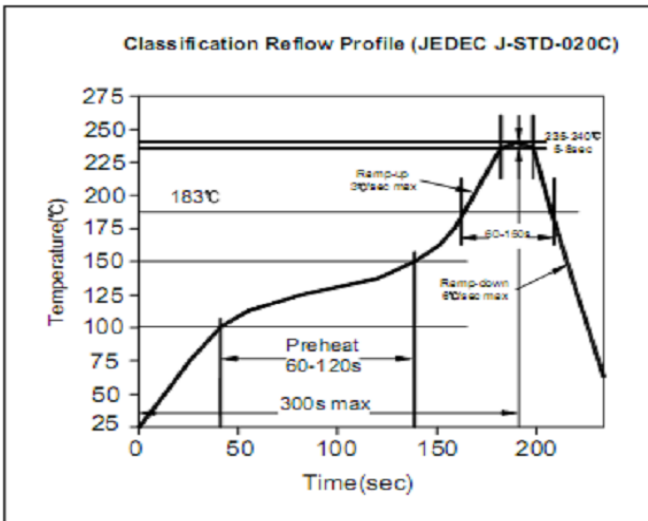

Lead free Solder Performance

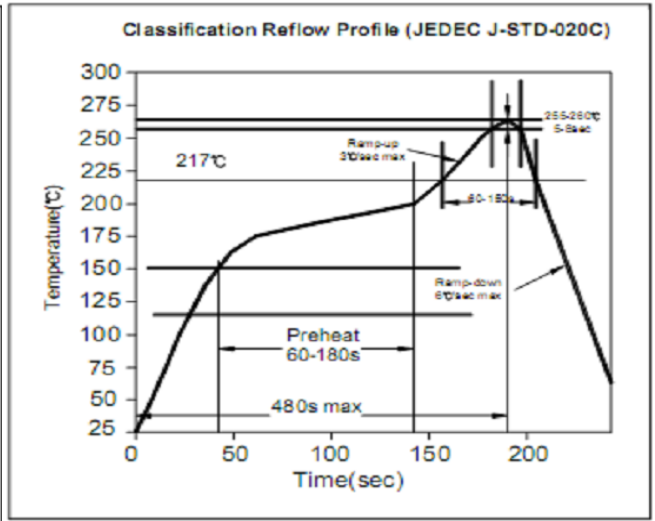

DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	03.02.2025
APPD:	Jimmy			FINISH	Josy	Sheet	2 from 2