

**Type Code**


**CPT22D09-3.2:**

*Chinasound Piezo Transducer 22mm width, type D(=27mm height, 7.0mm thickness), 9Vp-p rated voltage – 3.2KHz resonant frequency*

**Picture**



**Frequency Response Curve**

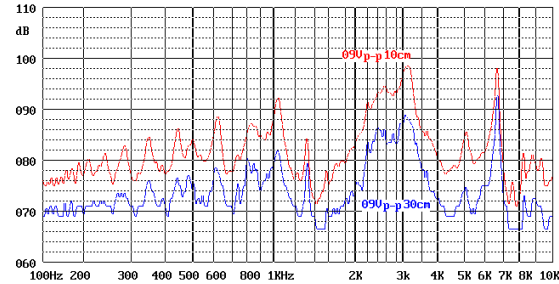

**Technical Terms**

Type		<b>CPT22D09-3.2</b>
Rated Voltage (square wave)	(Vp-p)	9
Operating Voltage (square wave)	(Vp-p)	1~30
Rated Current at 9Vp-p, 3.2KHz	(mA)	3 max.
Capacitance at 100Hz, 1V	(pF)	25000 ± 30%
SPL at 9Vp-p square wave, 10cm, 3.2KHz	(dB)	90 min.
Resonant Frequency	(Hz)	2700 ± 500
Operating Temperature	(°C)	-20~+70
Storage Temperature	(°C)	-30~+80
Weight	(g)	2.9

**Reliability**

Life Test	Operate the part at 9Vp-p in room temperature continuously for 1000 hours.
Operating Temperature	Driving from -20 °C to +70 °C within 30 minutes for 2 cycles
High Temperature	+80 °C+/-2 °C, 120hrs
Low Temperature	-30 °C+/-2 °C, 120hrs
Humidity	+60 °C+/-2 °C, 90~95%RH, 120hrs
Thermal Shock	-30 °C+/-2 °C, 1hr→+20 °C,5min,→+80 °C+/-2 °C, 1hr→+20 °C,5min, 5 cycles
Shock	980m/s <sup>2</sup> (=100g) shock for each 3 mutually perpendicular directions to each of 3 times by half sine wave
Vibration	1.5mm with 10 to 50Hz of vibration frequency to each of 3 perpendicular direction for 2 hrs
Drop Test	Dropped naturally from 700mm height onto the surface of 10mm thick wooden board. 2 directions - upper and side of the part are to be applied.

All specifications must be satisfied after the test (Recovery:2 to 4 hrs of recovery under the standard condition after the removal from test chamber).

**Dimensions (Unit:mm)**

