

Type Code


CET09D3.6-25-2.7

Chinasound Electro-magnetic Transducer 9.6mm diameter, type D(=5.0mm height), 3.6Vp-p rated voltage – 25ohm coil resistance – 2.7KHz resonant frequency

Picture



Frequency Response Curve

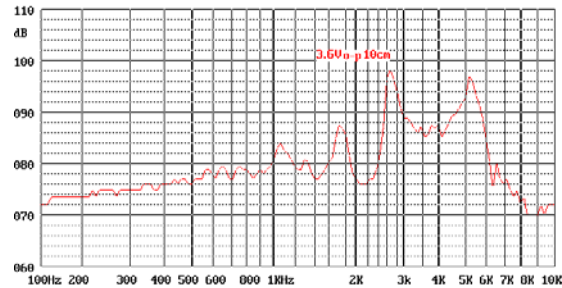

Technical Terms

Type	CET09D3.6-25-2.7	
Rated Voltage (square wave)	(Vo-p)	3.6
Operating Voltage	(Vo-p)	2-5
Rated Current at 3.6Vo-p, fo	(mA)	60 max.
Coil Resistance	(ohm)	25 ± 3
SPL at 3.6Vo-p, 10cm, fo	(dB)	85 min.
Resonant Frequency	(Hz)	2731 ± 500
Operating Temperature	(°C)	-25~+70
Storage Temperature	(°C)	-30~+85
Weight	(g)	0.8

Other Rated Voltage and Coil Resistance are available.

Reliability

Life Test	Operate the part at 3.6Vo-p in room temperature continuously for 1000 hours.
Operating Temperature	Driving from -25 °C to +70 °C within 30 minutes for 2 cycles
High Temperature	+85 ± 2 °C for 96 hours
Low Temperature	-30 ± 2 °C for 96 hours
Humidity	25 °C ± 2 °C, 90-95%RH, 5hr → up to 55 °C ± 2 °C, 90-95%RH, 0.5hr → 55 °C ± 2 °C, 90-95%RH, 5hr → down to 25 °C ± 2 °C, 90-95%RH, 0.5hr, 10 cycles
Thermal Shock	-30°C ± °C, 30min → +20 °C, 15min. → +85 °C ± 2 °C, 30min → +20 °C, 15min, 5 cycles
Shock	98m/s ² (=10g) shock for each 3 mutually perpendicular directions to each of 3 times by half sine wave
Vibration	1.5mm with 10 to 50Hz of vibration frequency to each of 3 perpendicular direction for 2 hrs
Drop Test	Dropped naturally from 700mm height onto the surface of 10mm thick wooden board. 2 directions - upper and side of the part are to be applied.

All specifications must be satisfied after the test (Recovery: 2 to 4 hrs of recovery under the standard condition after the removal from test chamber).

Dimensions (Unit:mm)

