

Type Code


CMS20R3.2-4N0.5-2B840:

Chinasound Mylar Speaker 20mm diameter, 3.2mm height, Round metal frame - 4 ohm rated impedance, NdFeB magnet, 0.5W rated power – type 2, Black Mylar cone, 840 Hz rated frequency


Picture



Frequency Response Curve

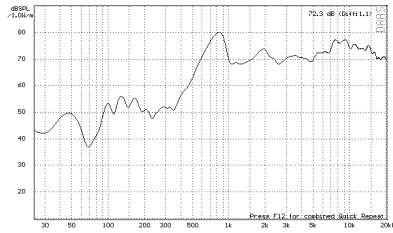

Tested by DAAS

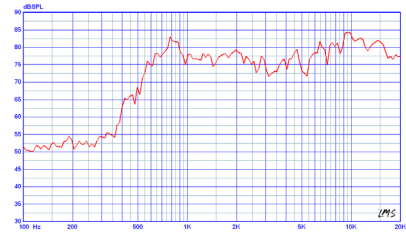

Tested by LMS at 0.5W 0.5m

Technical Terms

Type	CMS20R3.2-4N0.5-2B840	
*Rated Impedance	(ohm)	4+/-15%
Rated (Max.) Power	(W)	0.5 (1)
Resonance Frequency	(Hz)	840+/-20%
Rated Frequency Range	(Hz)	fo~20000
*Sound Pressure Level	(dB)	75+/-3 at 1m1W
Operating Temperature	(°C)	-20~+60

*Other Rated Impedance is available. **Average of SPL values at 800, 1000, 1200 & 1500 Hz.

Reliability

Buzzes & Rattles	0.5W(=1.41V) sine wave
Load Test	0.5W(=1.41V) for 24hrs
High Temp. Test	+60±2C° for 16hrs
Cold Temp. Test	-20+/-2C° for 2hrs
Moisture Test	+40+/-2C°, 92+/-% R.H. for 48hrs
Temp. Cycling Test	5 cycles, 1 cycle consisting of -20+/-2C° for 10min; 20+/-5C° for 5min; +50+/-2C° for 10min; 20+/-5C° for 5min
Vibration Test	Freq.: 10Hz to 55Hz; Amplitude:1.5mm; Time: 30min per each axis (X,Y and Z-axis)

All specifications must be satisfied after the test (Recovery:2 to 4 hrs of recovery under the standard condition after the removal from test chamber)

Dimensions (Unit:mm)

