


EDCON-COMPONENTS




Specifications



Current Rating: 0,75 Ampere
 Insulator Resistance: 5000 Megaohm min.
 Contact Resistance: 20m Ohm max.
 Dielectric Withstanding: AC 500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: High Temperature Thermoplastic

 Contact Plating: Tin, Gold or Selective Plated
 Standard: Gold Flash Overall

P.C.B Layout

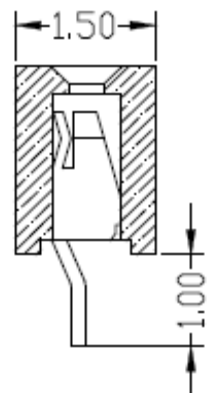

Drawing

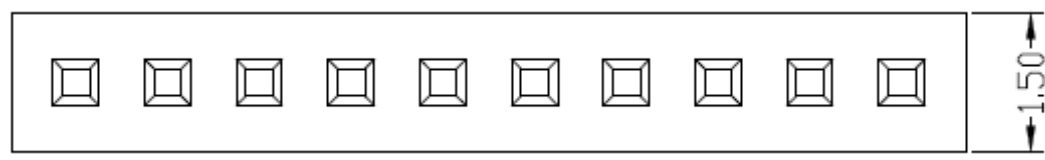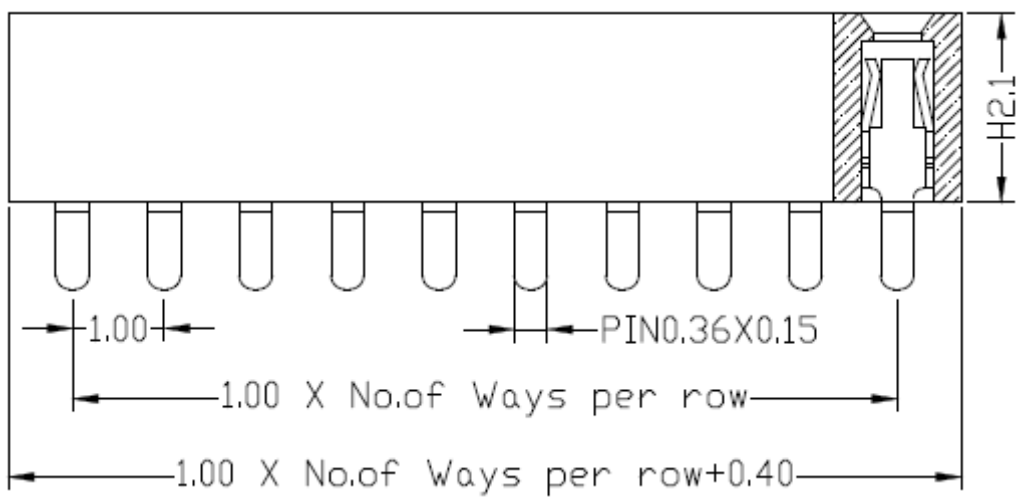


THT Single Row Female Header Pitch 1,00mm

Part No.: **T27D1006-**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	07.05.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

Customer:

EDCON-COMPONENTS




Pin Code length table free configuration

Table No.1				
Order Code	Dimension (mm)			
	D			
A01	1,00			
A02				
A03				
A04				
A05				
A06				
A07				
A08				
A09				
A10				
A11				
A12				
A13				
A14				
A15				
A16				
A17				
A18				
A19				
A20				
A21				
A22				

THT Single Row Female Header Pitch 1,00mm	
Part No.:	T27D1006-
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	07.05.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 4	

EDCON-COMPONENTS



Ordering Informations

Serie	No. of Pos.	Construction	Contact Plating	Material	Special function	Pin Length Code	ROHS	Packing		
T27D1006-	XX	TS	G0	PB	N	A01	R	BU		

02 ~ 50Pos.	TS= THT Straight PiN	G0= Gold Flash (Standard)	PB= PA 6T	N= No special function	look Table No. 1	N=NO ROHS conform	BU= Bulk (Standard)
		T0= Tin plated	LC= LCP			R= ROHS conform	TU= Tube w/o Cap
		GA= 3µ Gold Plating	PA= PA-46	TC= Tube w. pic and Place Cap			
		GB= 5µ Gold Plating		TY= Tray packing w/o Cap			
		GC= 10µ Gold Plating		TR= Tape/Reel w. pic and Place Cap			
		GC= 15µ Gold Plating					
		GC= 30µ Gold Plating					


**THT Single Row Female
Header Pitch 1,00mm**

Part No.: **T27D1006-**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	07.05.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4

Customer:


EDCON-COMPONENTS



Soldering Profile for Lead Soldering (P.B.T.)



Soldering Profile for Lead Free Soldering (PA6T)

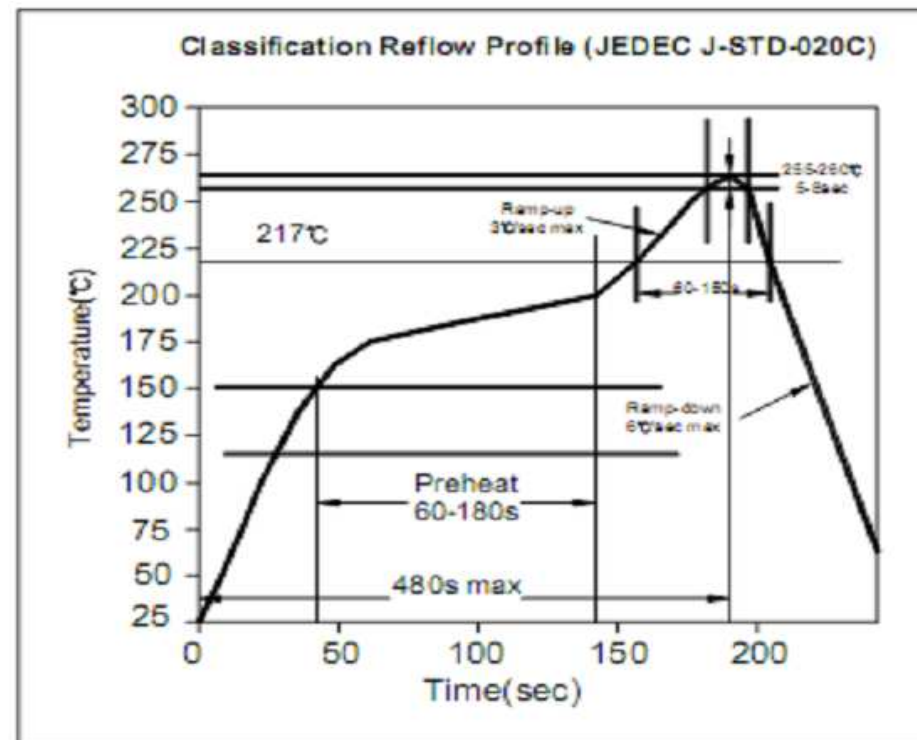

THT Single Row Female Header Pitch 1,00mm

Part No.: **T27D1006-**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	07.05.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	Customer:

www.edcon-components.com

email: info@edcon-components.com