


EDCON-COMPONENTS




8,0VA Standard PCB Encapsulated -Transformer

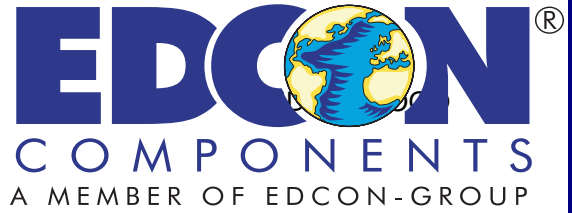


Technical specifications

Power from 0,6VA to 36VA
 Dielectric Strength - 3750 Vrms
 High ambient operation temperature (+75°C)
 Primary (115V 60HZ / 230V/50Hz)
 Secondary Single or Dual Output
 Insulation Class - Class B (130°C)
 Safety Approvals VDE / CE

Technical drawing

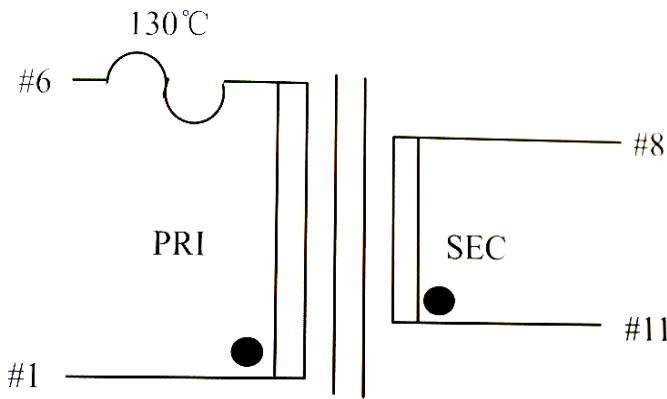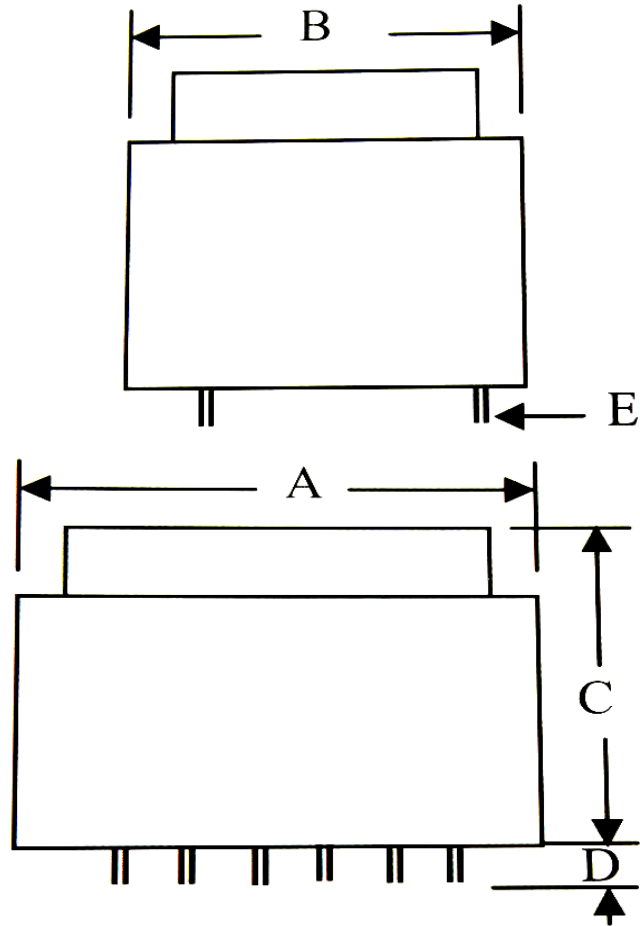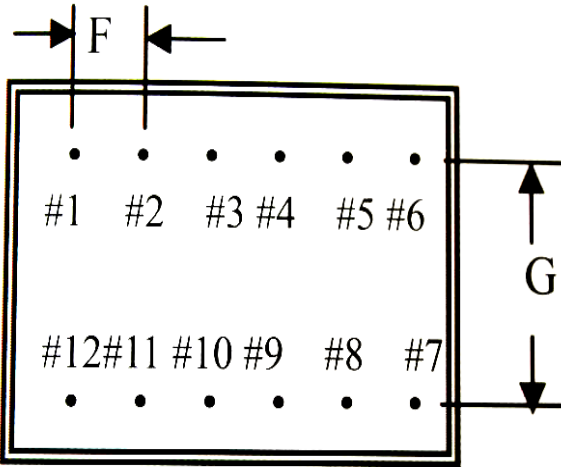

Single Output

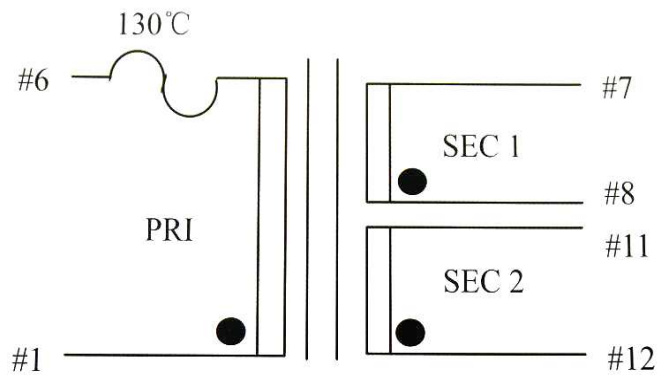


Dual Output

Standard PCB Encapsulated Transformer


EDCON-COMPONENTS

8,0VA Standard PCB Encapsulated -Transformer



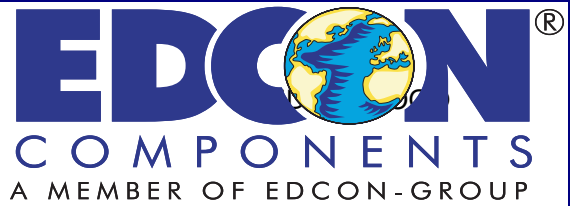


Technical specifications


Power from 0,6VA to 36VA
 Dielectric Strength - 3750 Vrms
 High ambient operation temperature (+75°C)
 Primary (115V 60HZ / 230V/50Hz)
 Secondary Single or Dual Output
 Insulation Class - Class B (130°C)
 Safety Approvals VDE / CE

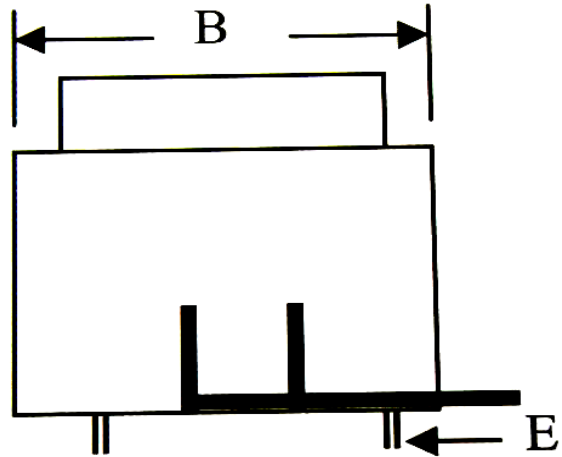

Technical drawing

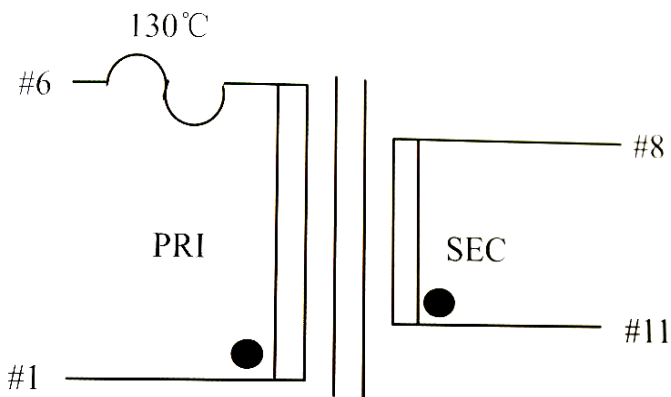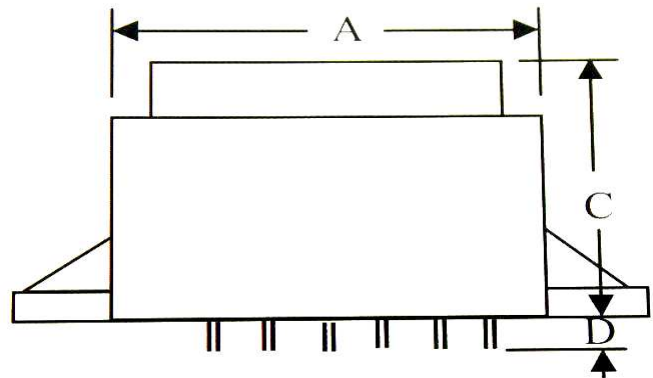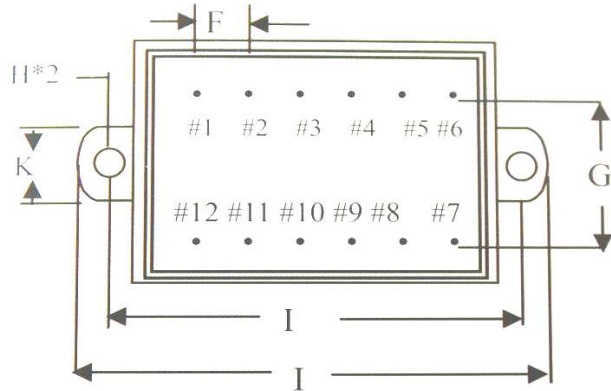

Single Output

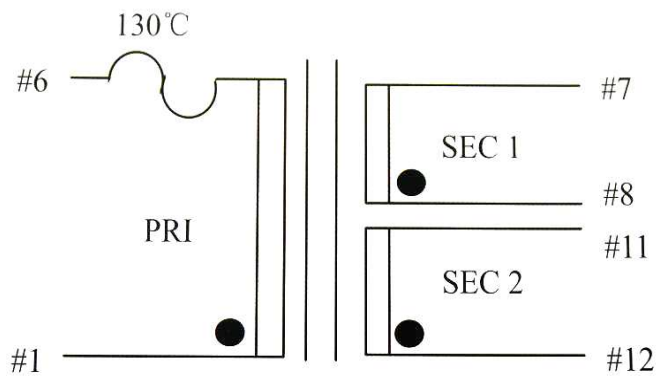


Dual Output

Standard PCB Encapsulated Transformer

EDCON-COMPONENTS

8,0VA Standard PCB Encapsulated -Transformer

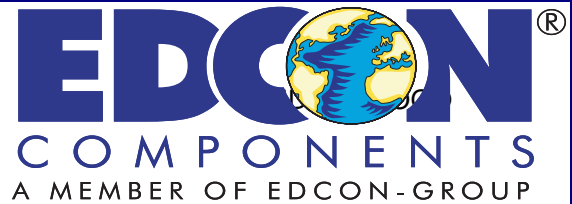

Technical dimensions

Serie	Dimensions (mm)						
	A	B	C	D	E	F	G
8,0 (VA)	53,0	45,0	35,5	4,0	0,64*0,64	5,0	27,5
Toler. (mm)	Max.	Max.	Max.	./-1,0	./-0,1	./-0,2	./-0,5
	H	I	J	K			
	4,2	67,0	60,5	10,0			
Toler. (mm)	./-0,2	Max.	./-0,5	./-0,5			

Ordering Informations

Serie	Core	Output Layer	Output Voltage	Mounting Ear
V11045	48	D	060	M

D = Single Output for 230VAC	060 = 6V 072 = 7,2V 090 = 9V 100 = 10V	Empty W/O Mounting ear
DS = Single Output for 115VAC	120 = 12V 150 = 15V 180 = 18V 240 = 24V	M = with Mounting ears

2x6V = 2x666mA
 2x7,2V = 2x555mA
 2x9V = 2x444mA
 2x10V = 2x400mA
 2x12 = 2x333mA
 2x15 = 2x266mA
 2x18V = 2x222mA
 2x24V = 2x166mA

Standard PCB Encapsulated Transformer