



R47001-020

Features:

Size 0805
Lead Free and compliant with the European Union
Fast tripping resettable circuit protection
Surface mount packaging for automated assembly

Technical Specifications:

I_H Hold current maximum current device will pass without interruption in 20° C still air unless

I_T: Trip current: minimum current that will switch the device from low resistance, Resistance in 20°C still unless otherwise specified.

I_{max}: Maximum current device can VMAXIMAX 100 vcycles --- NO arcing or burning.

V_{max}: Maximum Voltage device can withstand without damage at rated current.

P_d: power dissipated from device when in the tripped state in 20°C still air unless otherwise specified.

R_{min}: Minimum resistance of device as supplied at 20°C unless otherwise specified.

R₁ max. Maximum device resistance in the nonstripped state 1 hour post reflow.

Thermal Derating chart-I H (A)

Range	Maximum ambient operating temperature (°C)								
	-.40	-.20	0	23	40	50	60	70	85
200mA	0,29	0,26	0,23	0,2	0,16	0,14	0,13	0,12	0,11

Approval:



SMT POLY FUSE SIZE 0805

Part No.: **R47001-020**

Customer:


DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	06.04.2007
APPD:	Jimmy			FINISH	Josy	Sheet	1 from 3

Copyright by EDCON-COMPONENTS H.Schmitt 11.6.2009



Technical Drawing and Informations

Dimensions

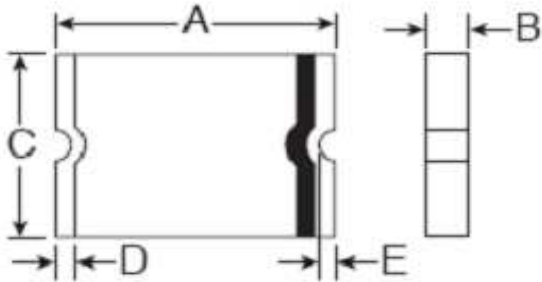


A (mm)		B (mm)		C (mm)		D (mm)		E (mm)	
Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
2,00	2,20	0,40	2,00	1,20	1,50	0,10	0,70	0,20	--

Performance Rating:

Range	ICH	IT	V max	I m ax	Pd typ	Maximum Time to Trip		Resistance:		
	(A)	(A)	(V DC)	(A)	(W)	Current (A)	Time (Sec.)	Rmin (Ω)	Rmax (Ω)	R1max (Ω)
	200mA	0,2	0,5	9,0	40,0	0,5	8,0	0,02	0,5	2,00

PAD Layout



A (mm)	B (mm)	C (mm)
1,00	1,17	1,59

SMT POLY FUSE SIZE 0805

Part No.: **R47001-020**

Customer:


DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	06.04.2007
APPD:	Jimmy			FINISH	Josy	Sheet	2 from 3

Copyright by EDCON-COMPONENTS H.Schmitt 11.6.2009




Soldering Information

Lead Solder Performance

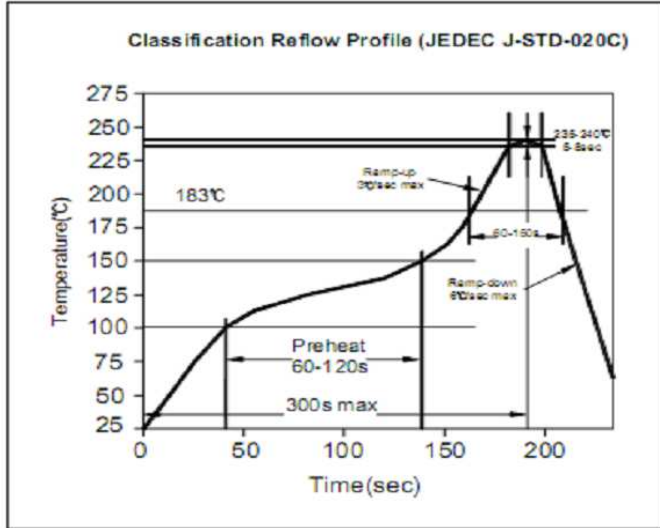

Lead free Solder Performance

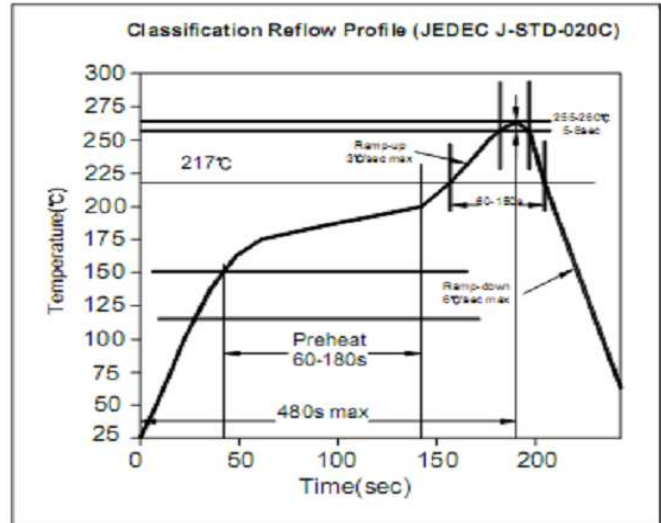

Ordering Informations:

Item-No. & Range	ROHS	Packing
------------------	------	---------

R47001-020	R	TR
-------------------	----------	-----------

020 = 200mA

R= ROHS	TR= Tape / Reel Standard)
N= Non ROHS	
BU= Bulk	

SMT POLY FUSE	SIZE 0805
Part No.:	R47001-020
Customer:	

DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	06.04.2007
APPD:	Jimmi			FINISH	Josi	Sheet	3 from 3

Copyright by EDCON-COMPONENTS H.Schmitt 11.6.2009