



R47004-160

Features:

Size 1812
Lead Free and compliant with the European Union
Fast tripping resettable circuit protection
Surface mount packaging for automated assembly

Technical Specifications:

I_H Hold current maximum current device will pass without interruption in 25° C still air unless

I_T: Trip current: minimum current that will switch the device from low resistance, Resistance in 25°C still unless otherwise specified.

I_{max}. Maximum current device can VMAXIMAX 100 vcycles --- NO arcing or burning.

V_{max}: Maximum Voltage device can withstand without damage at rated current.

P_d: power dissipated from device when in the tripped state in 25°C still air unless otherwise specified.

R_{min}: Minimum resistance of device as supplied at 25°C unless otherwise specified.

R₁ max. Maximum device resistance in the nonstripped state 1 hour post reflow.

Approval:



SMT POLY FUSE	SIZE
	1812

Part No.:	R47004-160
-----------	-------------------

Customer:


DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	06.04.2007
APPD:	Jimmy			FINISH	Josy	Sheet	1 from 3

Copyright by EDCON-COMPONENTS H.Schmitt 11.6.2009



Technical Drawing and Informations

Dimensions

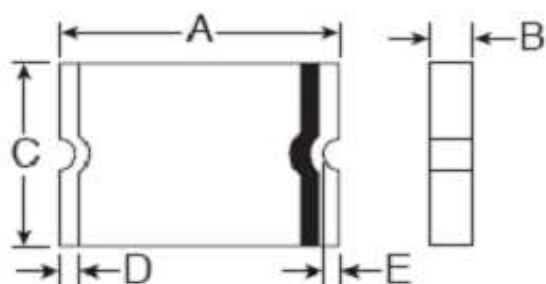


A (mm)		B (mm)		C (mm)		D (mm)		E (mm)	
Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
4,37	4,73	3,07	3,41	0,280	0,48	0,25		0,200	--

Performance Rating:

Range	ICH	IT	V max	I max	Pd typ	Maximum Time to Trip		Resistance:		
	(A)	(A)	(V DC)	(A)	(W)	Current (A)	Time (Sec.)	Rmin (Ω)	Rmax (Ω)	R1max (Ω)
	1,60A	1,600	3,20	9,0	100,0	0,80	8,00	1,000	0,03	0,08

PAD Layout



A (mm)	B (mm)	C (mm)
3,45	1,78	3,15

SMT POLY FUSE SIZE 1812

Part No.: **R47004-160**

Customer:

DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	06.04.2007
APPD:	Jimmy			FINISH	Josy	Sheet	2 from 3

Copyright by EDCON-COMPONENTS H.Schmitt 11.6.2009




Soldering Information

Lead Solder Performance



Lead free Solder Performance

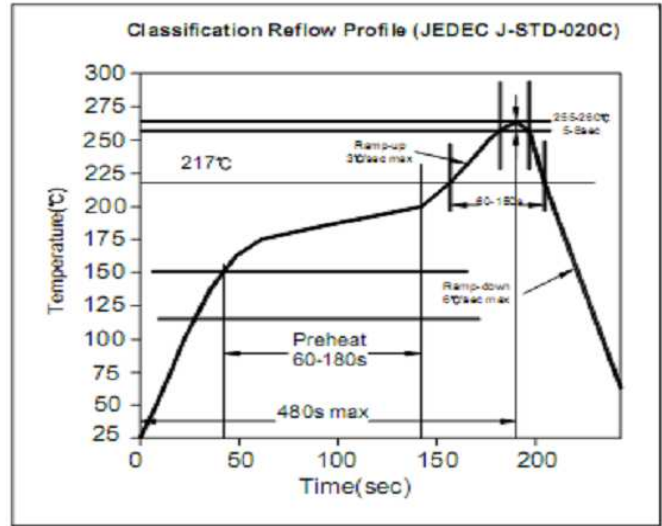

Ordering Informations:

Item-No. & Range	ROHS	Packing
------------------	------	---------

R47004-160	R	TR
-------------------	----------	-----------

160 = 1,60A

R= ROHS	TR= Tape / Reel Standard)
N= Non ROHS	
BU= Bulk	

SMT POLY FUSE	SIZE
	1812
Part No.:	R47004-160
Customer:	

DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	06.04.2007
APPD:	Jimmi			FINISH	Josi	Sheet	3 from 3

Copyright by EDCON-COMPONENTS H.Schmitt 11.6.2009