

EDCON-COMPONENTS



Specifications

Features


- The plastic material used carries Underwriters Laboratory flammability recognition 94V-0
- High case dielectric strength
- Polarity symbols molded on body
- This series is UL listed under the Recognized Component Index file number E142814
- Plated leads solderable per MIL-STD-. 202 Method 208
- Polarity symbols marked on body
- Reliable low cost construction utilizing molded plastic technique.

Weight 5,6gr.

Maximum Ratings & Electrical Characteristics Ratings at 25°C ambient temperature

	Symbols	KBL 6005	KBL 601	KBL 602	KBL 604	KBL 606	KBL 608	KBL 610	Unit
Maximum reccurent peak reverse Voltage	VRRM	50	100	200	400	600	800	1000	Volt
Maximum rms Input voltage	VRMS	35	70	140	280	420	560	700	Volt
Maximum dc blocking Voltage	VDC	50	100	200	400	600	800	1000	Volt
Maximum average forward output rectified TA=100°C	I(AV)	6,0							Amps
Peak forward surge current 8,3ms single half sine-wave	IFSM	200							Amps
Maximum forward voltage drop	VF	1,1							Volt
Maximum revese voltage TA=25°C	IR	10							µA
Maximum revese voltage TA=125°C	IR	1000							µA
Operating and storage temperature range	TJ TSTG	-55°C to + 150°C							°C
I²t rating for fusing	I²t	166							A²t
Typical thermal resistance junction to case	R 0 JA	10							°C/W

Technical Drawing (Unit: inch(mm))

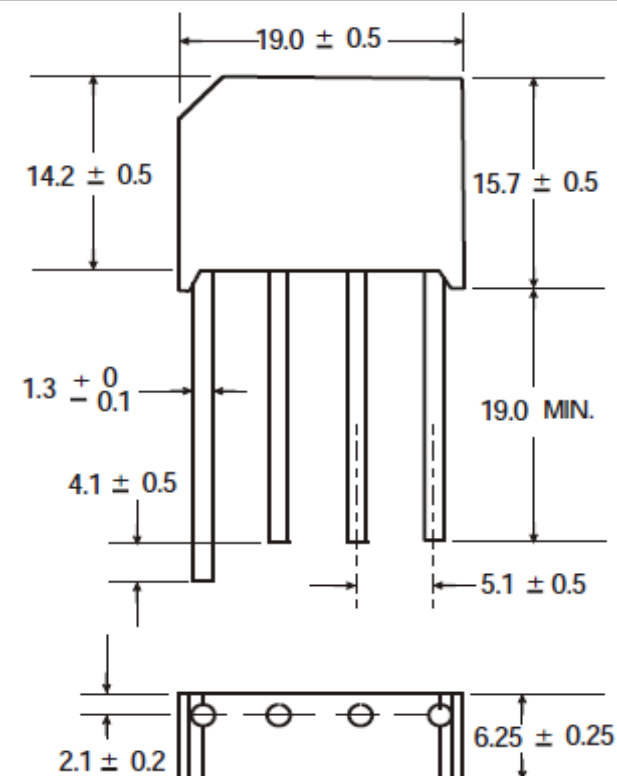

**Single Inline Bridge Rectifier
6,0A**

EDCON-Ser. **E15012**

International Serie: **KBL6xx**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.05.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 5

www.edcon-components.com


email: info@edcon-components.com

EDCON-COMPONENTS




Rating & Characteristics Curves (TA=25°C unless otherwise noted)

Derating Curve for Output Rectified Current

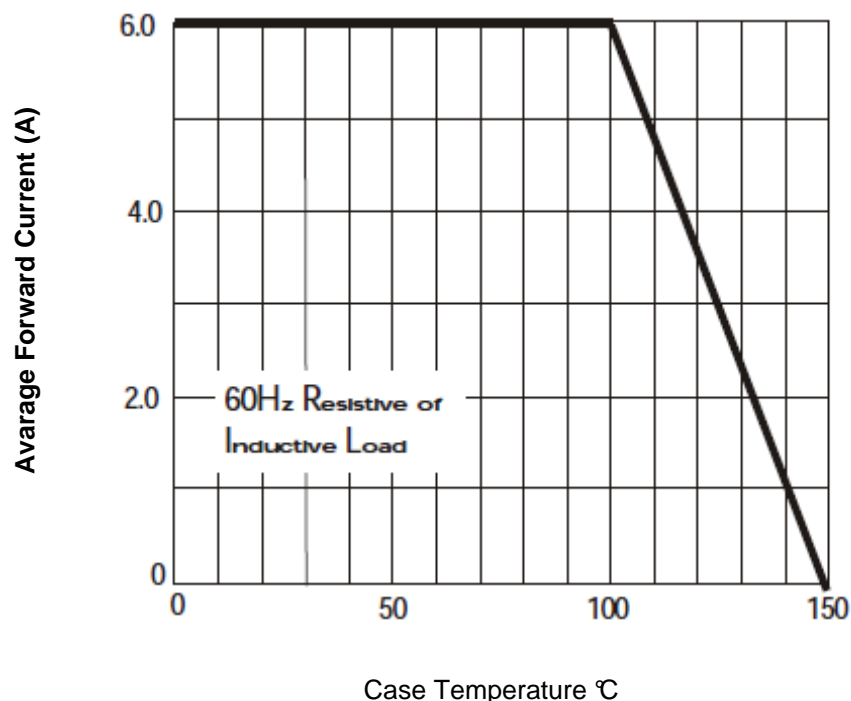

Maximum NON Repetitive Forward Surge Current

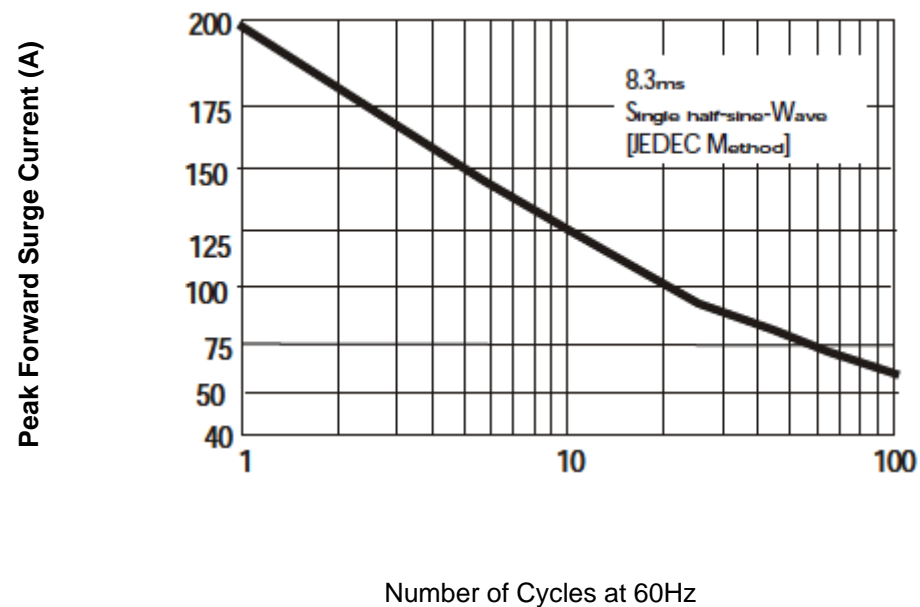

Single Inline Bridge Rectifier 6,0A	
EDCON-Ser.	E15012
International Serie:	KBL6xx

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.05.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 5	


www.edcon-components.com

email: info@edcon-components.com




Rating & Characteristics Curves (TA=25°C unless otherwise noted)

Typical Forward Characteristics

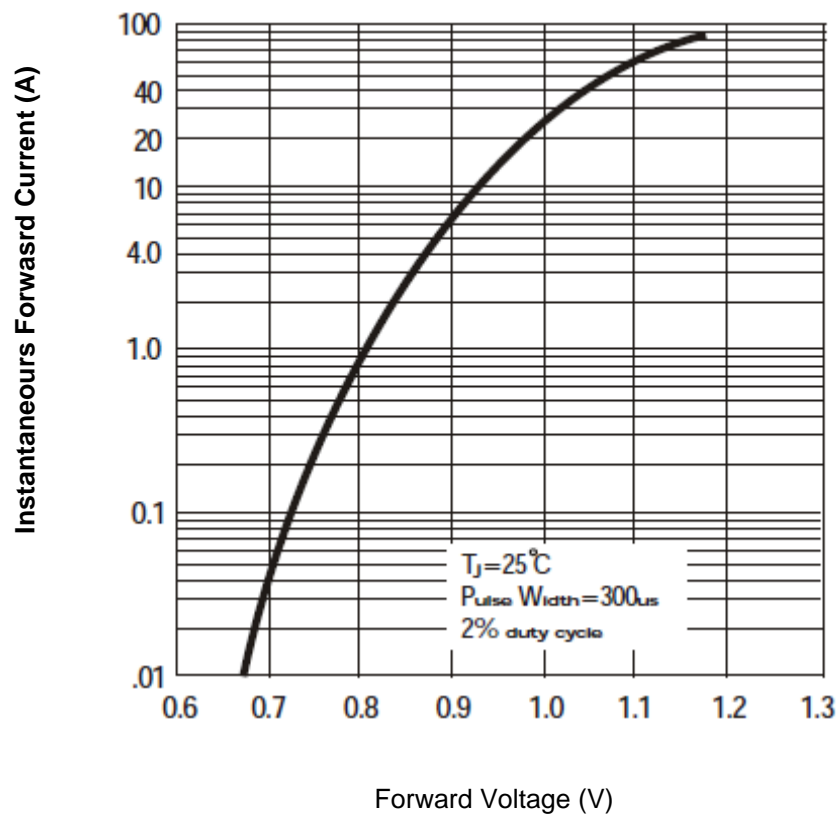

Typical Reverse Characteristics

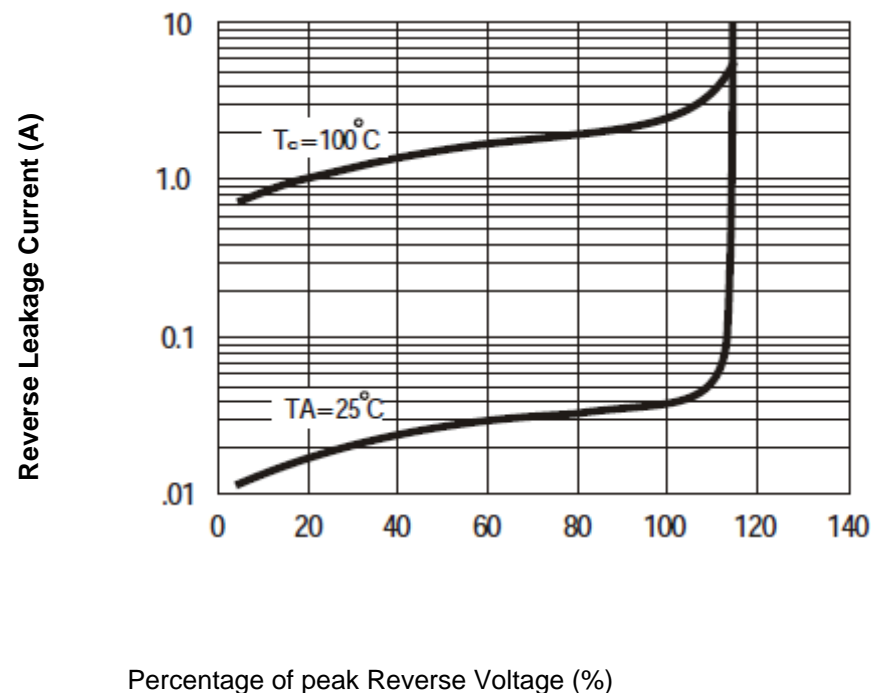

Single Inline Bridge Rectifier 6,0A	
EDCON-Ser.	E15012
International Serie:	KBL6xx


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.05.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 5	

EDCON-COMPONENTS



Rating & Characteristics Curves (TA=25°C unless otherwise noted)

Forward Current Derating Curve

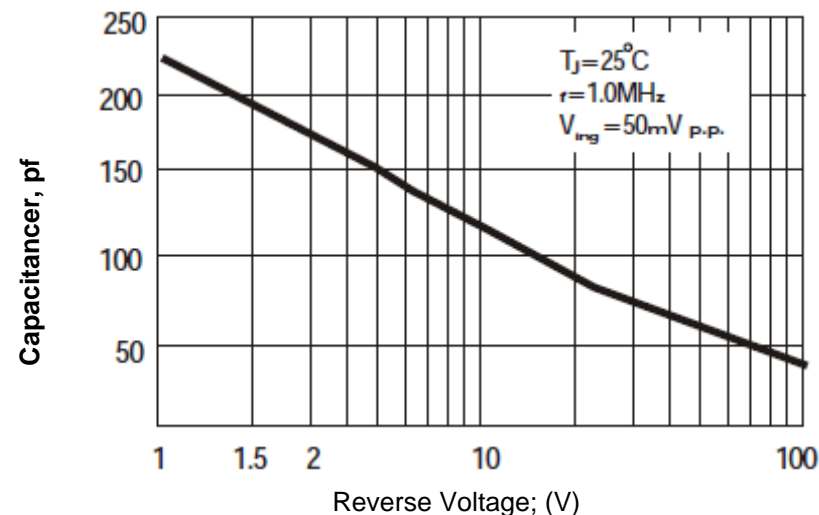

Ordering Informations

EDCON Serie	International Type	NO function	ROHS	Package					
E15012	KBL6xx	LL	R	BX					

Look Voltage Code Table	LL = Long Lead	R = ROHS Conform	BX = Box
	L4 = Lead length 4mm	N = NON ROHS Conform	

Single Inline Bridge Rectifier 6,0A	
EDCON-Ser.	E15012
International Serie:	KBL6xx

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.05.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		4 from 5



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)



Single Inline Bridge Rectifier 6,0A	
EDCON-Ser.	E15012
International Serie:	KBL6xx

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.05.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.	5 from 5	