

EDCON-COMPONENTS



Specifications


Features

- The plastic material used carries Underwriters Laboratory flammability recognition 94V-0
- This Serie is UL listed under the recognized Component Index file number E142814
- Single Inline terminals array suitable for PC board mounting
- High Case dielectric strength of 1500Vrms
- Molded plastic body over passivated junctions
- Polarity symbols molded on body
- High surge current capability
- Plated leads solderable per MIL-STD-. 202 Method 208
- Weight 7,0gr.

Maximum Ratings & Electrical Characteristics Ratings at 25°C ambient temperature

	Sym bols	KBJ 8005	KBJ 801	KBJ 802	KBJ 804	KBJ 806	KBJ 808	KBJ 810	Unit
Maximum reccurent peak reverse Voltage	VRRM	50	100	200	400	600	800	1000	Volt
Maximum rms Input voltage	VRMS	35	70	140	280	420	560	700	Volt
Maximum dc blocking Voltage	VDC	50	100	200	400	600	800	1000	Volt
Maximum average forward output rectified TA=100°C	I(AV)	8,0							Amps
Peak forward surge current 8,3ms single half sine-wave	IFSM	170							Amps
Maximum forward voltage drop	VF	1,1							Volt
Maximum revese voltage TA=25°C	IR	10							µA
Maximum revese voltage TA=125°C	IR	500							µA
Operating and storage temperature range	TJ TSTG	-55°C to + 150°C							°C
I²t rating for fusing	I²t	120							A²t
Typical thermal resistance junction to case	R 0 JA	1,6							°C/W

Technical Drawing (Unit: inch(mm))

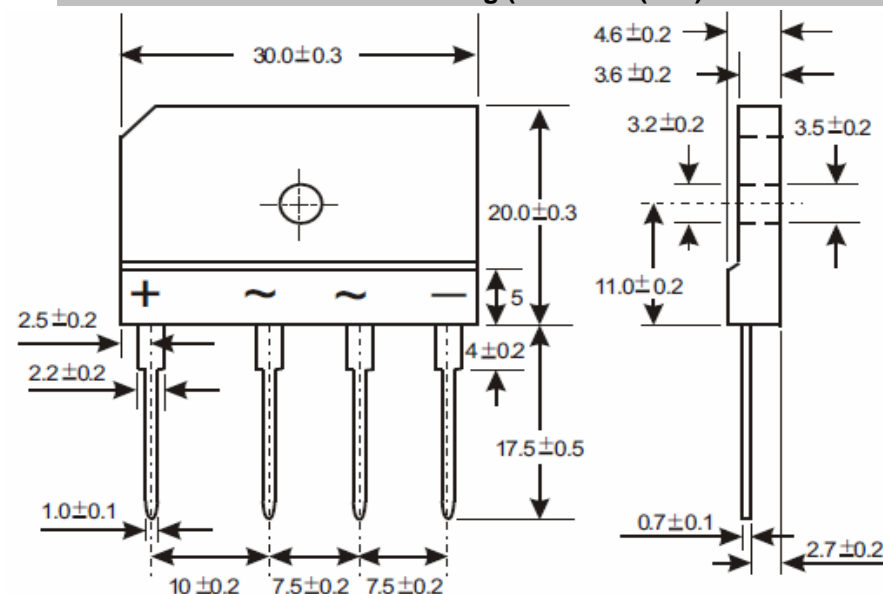

**Single Inline Bridge Rectifier
8,0A**

EDCON-Ser. **E15038**

International Serie: **KBJ8xx**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.05.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 5

www.edcon-components.com

email: info@edcon-components.com



EDCON-COMPONENTS



Rating & Characteristics Curves (TA=25°C unless otherwise noted)

Derating Curve for Output Rectified Current

Maximum NON Repetitive Forward Surge Current

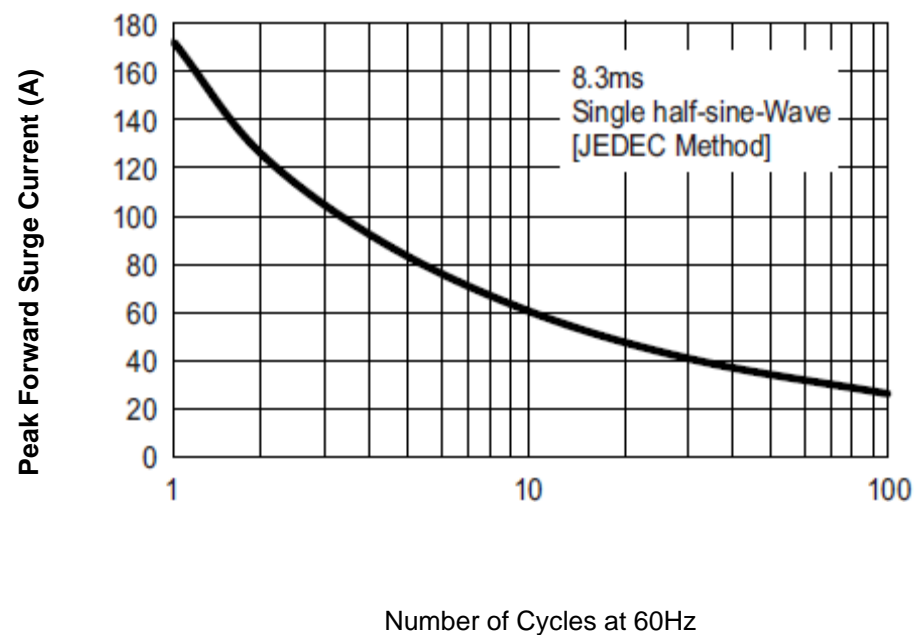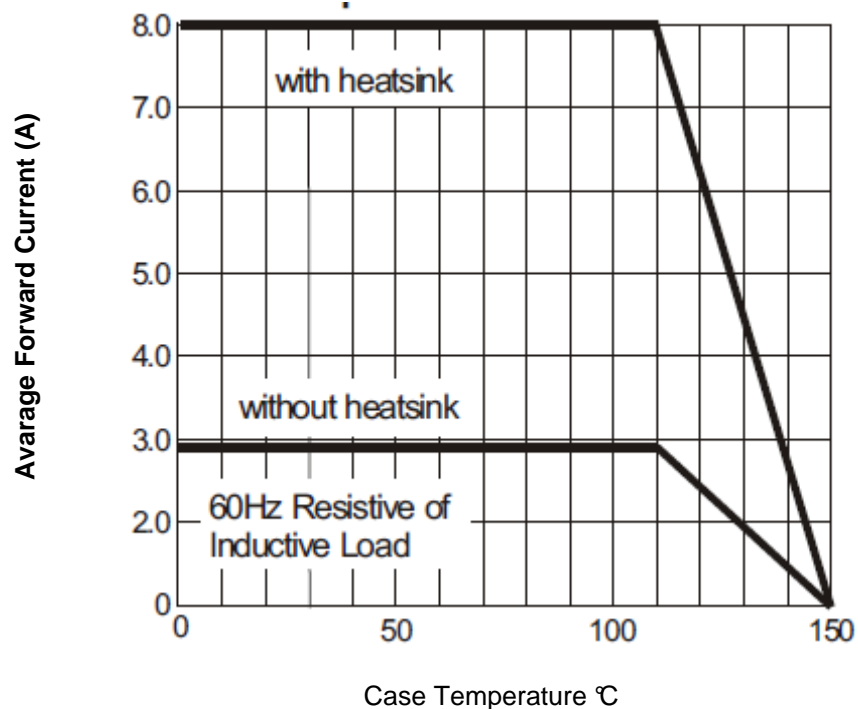

Single Inline Bridge Rectifier 8,0A	
EDCON-Ser.	E15038
International Serie:	KBJ8xx

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.05.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 5	

www.edcon-components.com



email: info@edcon-components.com



Rating & Characteristics Curves (TA=25°C unless otherwise noted)

Typical Forward Characteristics

Typical Reverse Characteristics

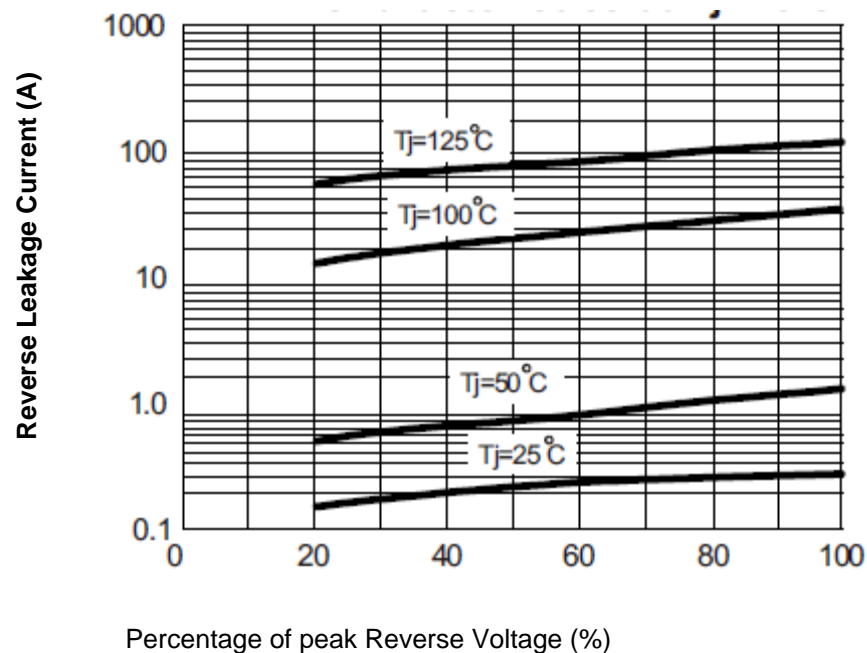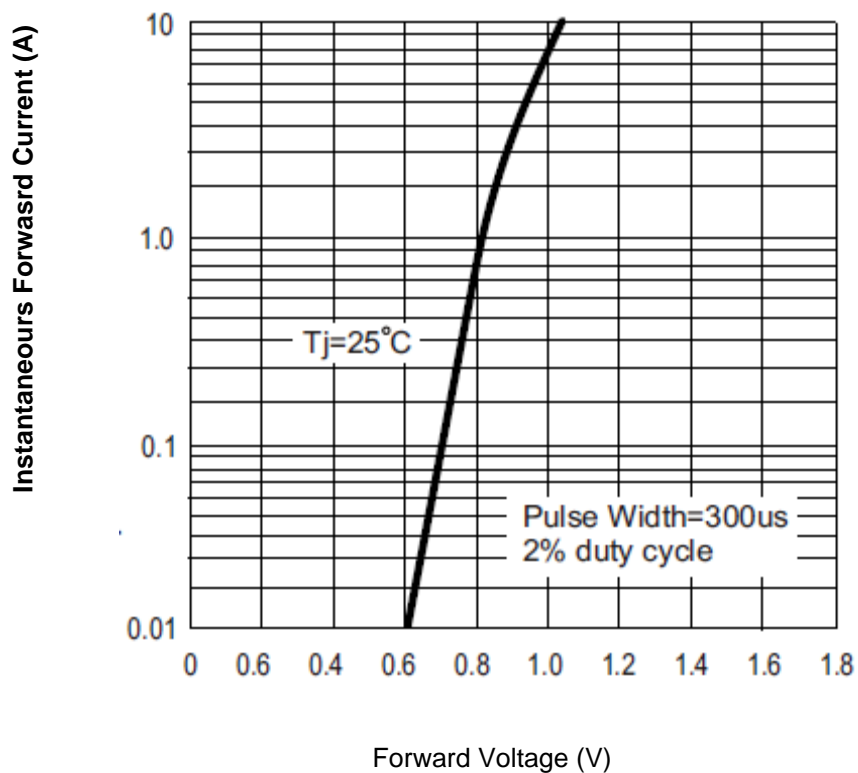


Single Inline Bridge Rectifier 8,0A	
EDCON-Ser.	E15038
International Serie:	KBJ8xx

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.05.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 5	

EDCON-COMPONENTS



Rating & Characteristics Curves (TA=25°C unless otherwise noted)

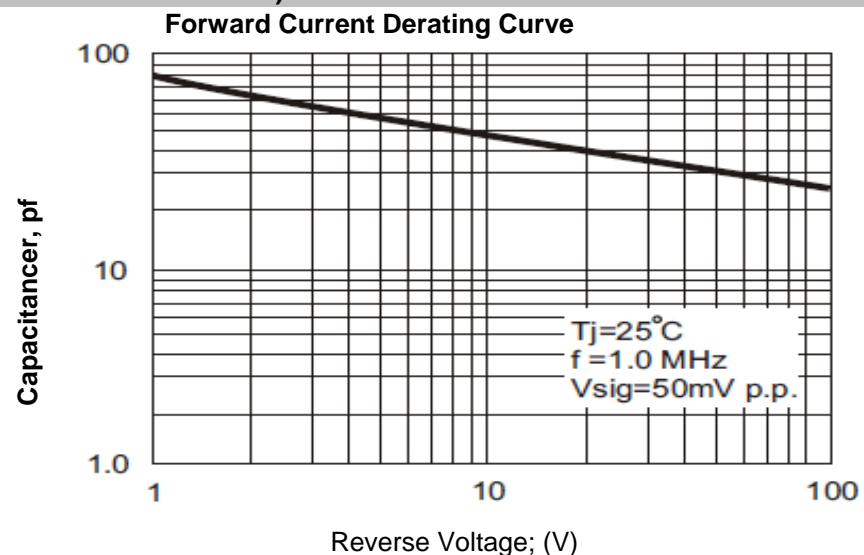

Ordering Informations

EDCON Serie	International Type	NO function	ROHS	Package					
-------------	--------------------	-------------	------	---------	--	--	--	--	--

E15038	KBJ8xx	LL	R	BX					
---------------	---------------	-----------	----------	-----------	--	--	--	--	--

Look Voltage Code Table	LL = Long Lead	R = ROHS Conform	BX = Box
	L4 = Lead length 4mm	N = NON ROHS Conform	

Single Inline Bridge Rectifier 8,0A	
EDCON-Ser.	E15038
International Serie:	KBJ8xx

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.05.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		4 from 5

www.edcon-components.com

email: info@edcon-components.com



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)



Single Inline Bridge Rectifier 8,0A	
EDCON-Ser.	E15038
International Serie:	KBJ8xx

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.05.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.	5 from 5	