

EDCON-COMPONENTS






T13A001

Technical Specifications:

| |
|------------------------|
| Operating Temperature: |
| Rated Load: |
| Contact Resistance: |
| Insulation Resistance: |
| Withstanding Voltage: |
| Actuating Force: |
| Lifetime: |
| |
| |

| |
|----------------------|
| . -30°C ~ + 70°C |
| DC 30V / 0,5A |
| < 0,03 Ohm |
| > 100M Ohm |
| AC 500V (50Hz) 1min. |
| 3 ~ 20N |
| 5000 cycles |
| |
| |

Technical Drawing:

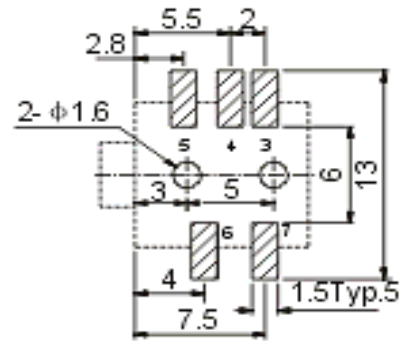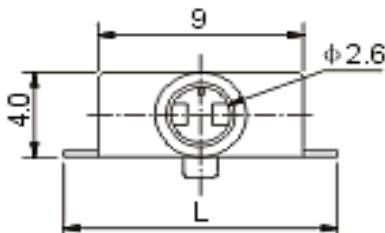


| | | | | | |
|---|------|-------------|---------------|---------------|---------------|
| L | 12.0 | CK-2.5-005 | CK-2.5-005-1 | CK-2.5-005-2 | CK-2.5-005-3 |
| | 11.0 | CK-2.5-005D | CK-2.5-005D-1 | CK-2.5-005D-2 | CK-2.5-005D-3 |
| | | | | | |

| |
|--------------------------|
| 2,5mm SMT Audio jack |
| Part No.: T13A001 |
| Customer: |

| | | | | | | | |
|-------|--------|------|--------|--------|--------|-------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | DATE | 06.05.2007 |
| APPD: | Schumi | | | FINISH | Jamy | Sheet | 1 from 2 |

Copyright by EDCON-COMPONENTS H.Schmitt 11.6.2009


EDCON-COMPONENTS




Reel Specifications

Solder Profile

Lead Solder

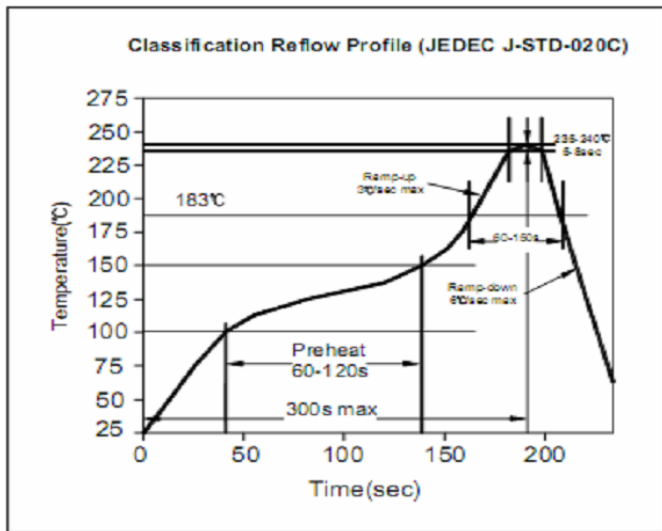

Lead free Solder

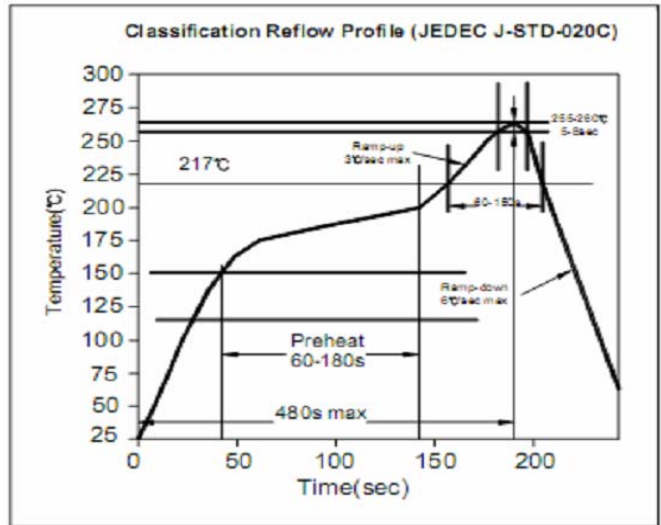

Ordering Informations:

| Item-No. | Circuit | ROHS | Packing | | | |
|----------|---------|------|---------|--|--|--|
| T13A001 | A | R | BU | | | |

| | | |
|---|---------------------------|---|
| A | R= ROHS N= Non ROHS | BU= Bulk (Standard) TR= Tape/Reel TR= Tray Packing |
| B | | |
| C | | |
| D | | |
| E | | |
| F | | |
| G | | |
| H | | |

| | |
|----------------------|----------------|
| 2,5mm SMT Audio jack | |
| Part No.: | T13A001 |
| Customer: | |

| | | | | | | | |
|-------|--------|------|--------|--------|--------|-------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | DATE | 06.05.2007 |
| APPD: | Schumi | | | FINISH | Jamy | Sheet | 2 from 2 |

Copyright by EDCON-COMPONENTS H.Schmitt 11.6.2009